
	8		1	7	6	5	4	3	2	1	
	DESCRIPTION	MATERIAL	FINISH				¥		REVISIONS		
	BODY	BRASS	NICKEL							DATE	APPV
	SOCKET	BeCu	GOLD						B UPDATED FOOTPRINT AND DIMENSIONS; ADDED NEW TITLE BLOCK	2-JUL-12	SAH
	INSULATION	PTFE	N/A						C ADDED DIMPLE TO PART	3-JUN-13	SAH
D											
_		1/4-36UNS-2/ THREADS-			-4X Ø 0.018 DIMPLE(S) EQUALLY SPACED		4X \$0.059 [1.50]	4X S 0.041 [1.04]	0.100 0.100 [2.55][2.55]		_
С					∅ 0.050 [1.27]	0.198 [5.04]			0.201 [5.10]	4X ∅ 0.059	
-1	>	-			0.150 3.81]		0.198 [5.04] \$0.276		RECOMMENDED FOOTPRIN	「[1.50] \T	<
В		-		0.535 [13.60]			4 [7.00]				
				SIDE VIEW			BACK VIEW				
_								1. / 2. 3.	ES: (UNLESS OTHERWISE SPECIFIED) ALL DIMENSIONS ARE IN INCHES [mm]. DIMENSIONS APPLY AFTER FINISHING. MANUFACTURE TO BE COMPLIANT WITH EU Ro SAFETY BREAK ALL SHARP CORNERS AND EDGES		
A								TOLERANCES	TECHNOLOGIES, AND SHALL BE OR REPRODUCTION OF THIS E OR IN PART, WITHOUT THE LINX TECHNOLOGIES OR ITS	ORT LANE IN, OR 9753 MOUNT	2 REV
								TOLERANCES	<u>x ± 1 xx ± 01 xxx ± 005</u> 3.MURPHY DT: 11-MAR-13 B CONSMA001	/ing SHEET	С
	8			7	6	5	4	3	2		CFDFB_C

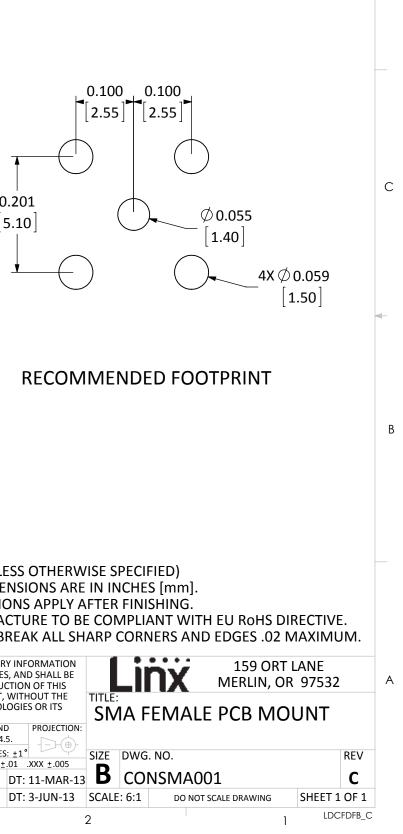

D