



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/05/14	F	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
3/06/15	G	UPDATED CONTACT RESISTANCE FROM 5mΩ TO 5mΩ	T.B.	B.S.	
5/08/15	H	UPDATED UL FILE NO.	T.B.	B.S.	

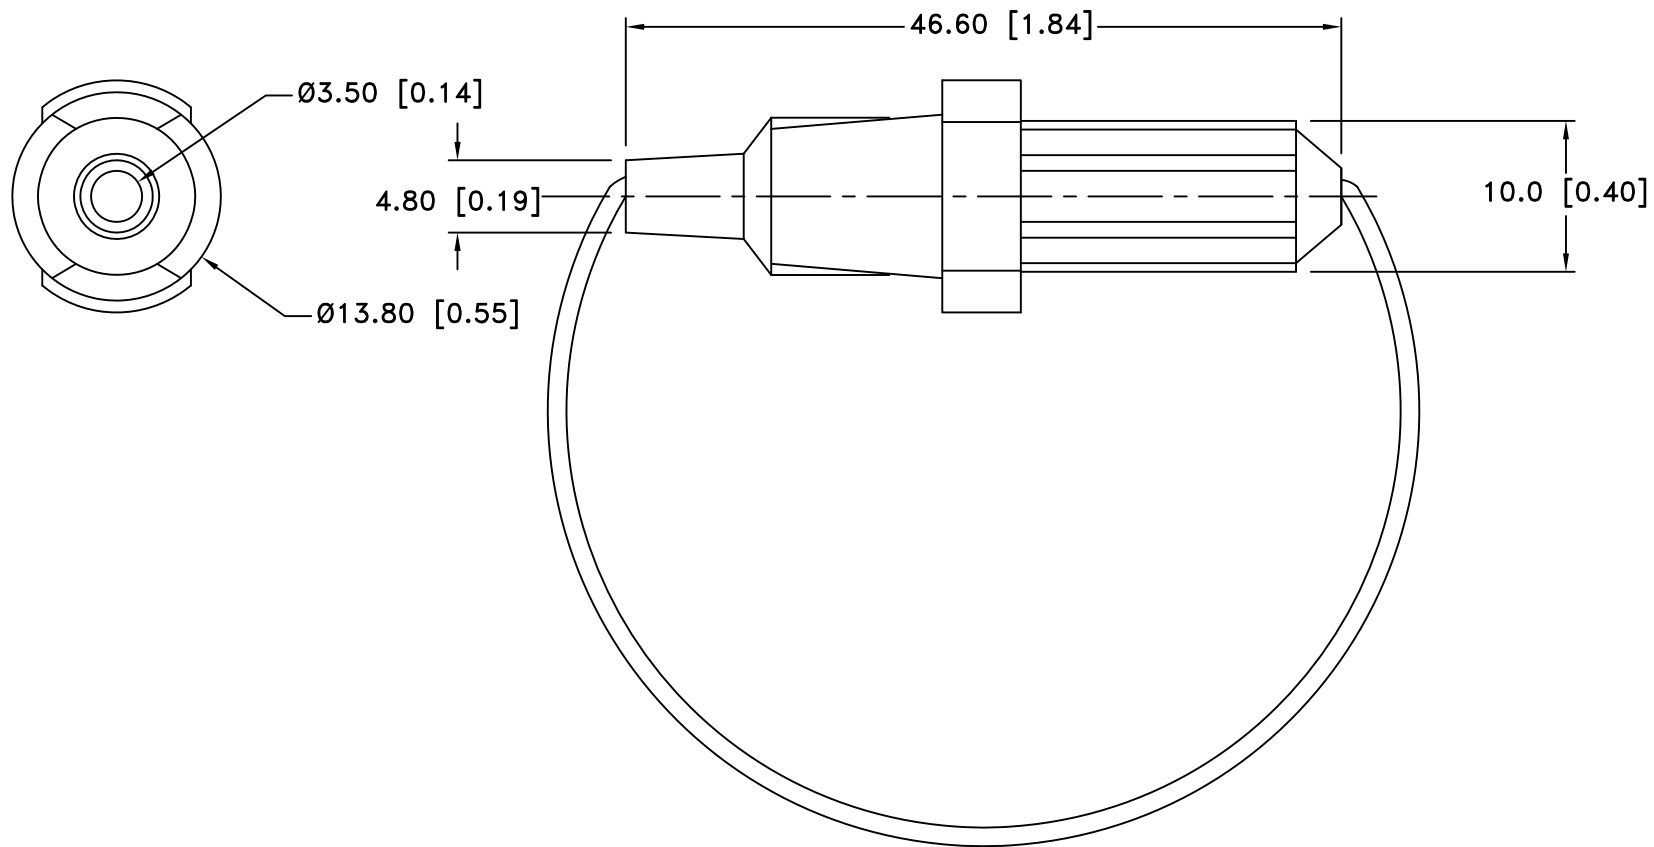

NOTES:

- MATERIAL:  
HOUSING : NYLON 6, UL 94V-2, FILE NO. E365089
  - LEAD WIRE IN LOOP: 16AWG, UL-CSA, 105°C, UL1015, 600V,  
TOTAL LENGTH 8.125"
  - MAXIMUM CURRENT: 10A
  - MELTING POINT: 200°C
  - INSULATION RESISTANCE AT 500V DC: 100M Ω MIN
  - CONTACT RESISTANCE: 5m Ω AT 1A DC
  - DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title FUSED POWER CORD W/PLASTIC INLINE FUSE HOLDER		
Angular ± 3°	Date 5/08/15	Drawing Number BF303	