

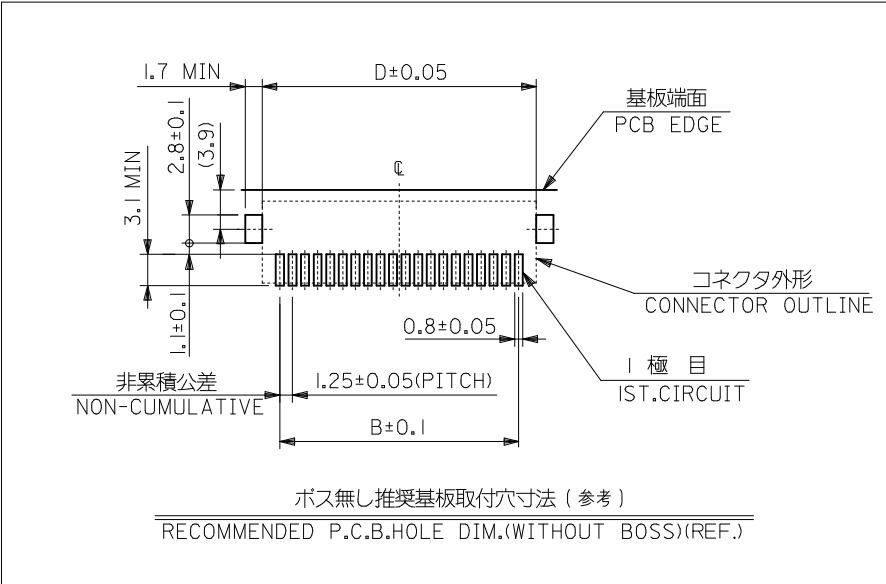


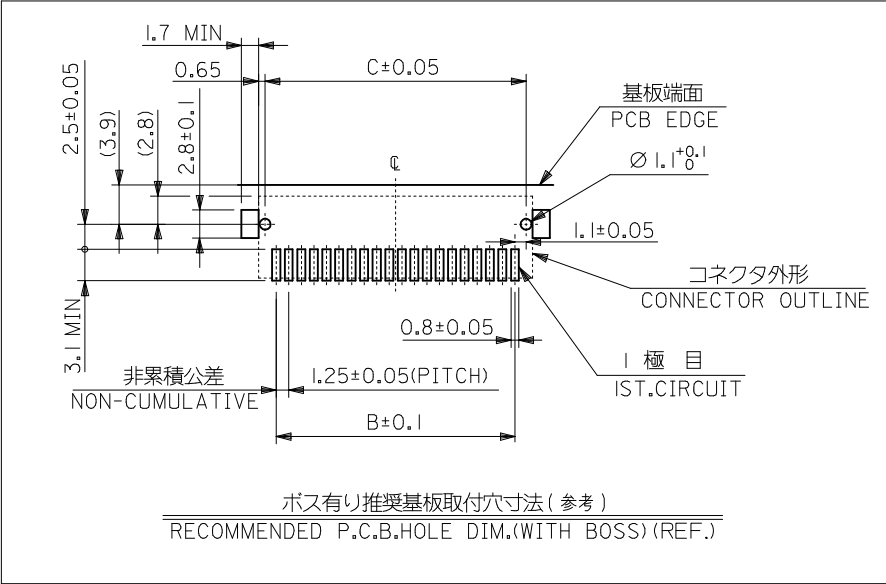


REVISED EC NO: J2016-0718 DRWN:SSHIMONISHI 2016/01/27 CHKD:KOMURAKAMI 2016/01/27 APPR:TKANEKO 2016/02/16 A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY N.AIDA	DATE '05/02/04	TITLE MINI MI2 1-ROW R/A SMT ASS'Y -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY K.TOJO	DATE '05/02/04					
		30 OVER	± 0.3	APPROVED BY N.UKITA	DATE '05/02/04	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-55456-010		2 OF 2		
				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

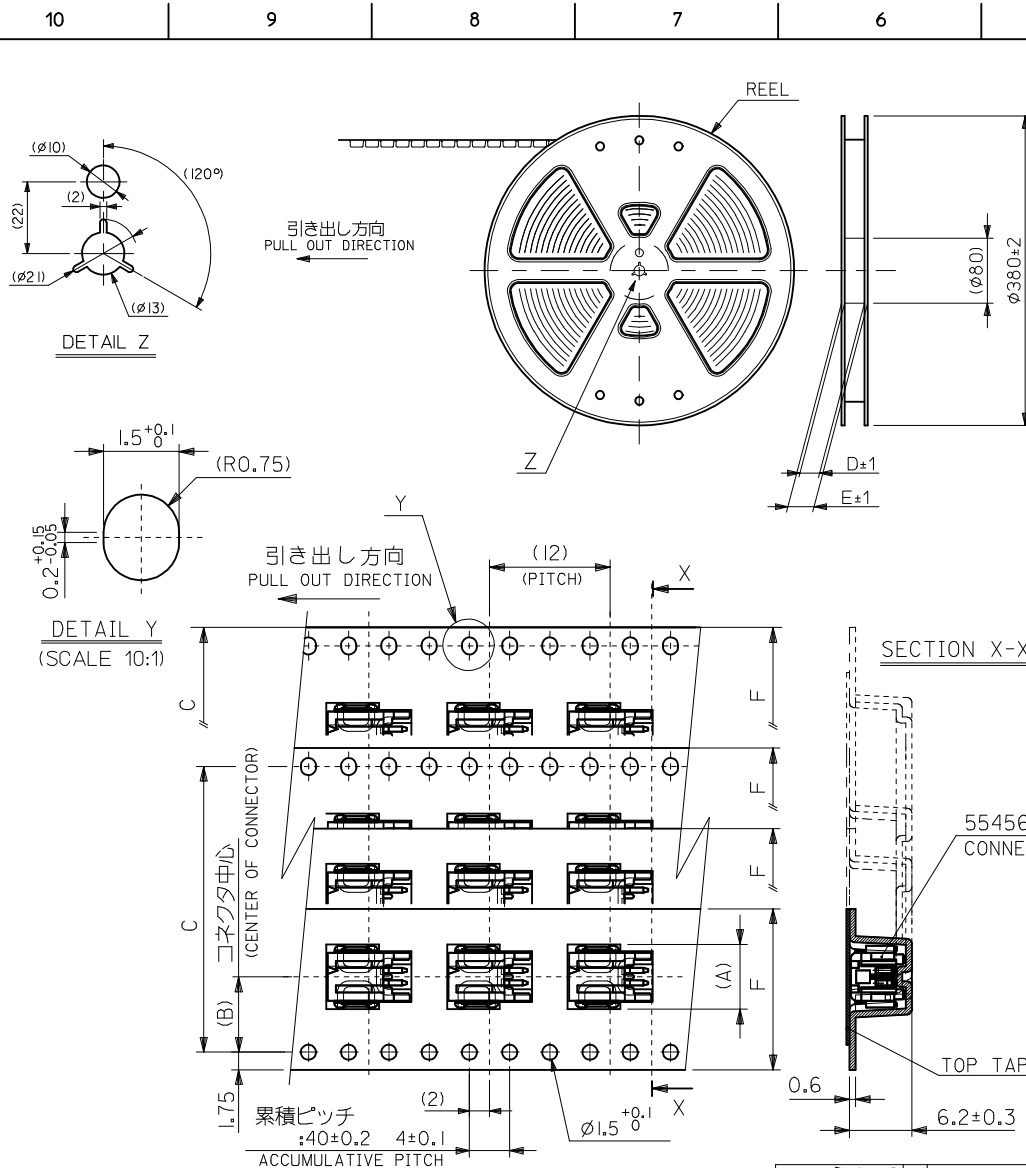

注 記 NOTES

- 製品番号 55456-**** の詳細寸法については、SD-55456-010 を参照下さい。
IN THE PACKAGE, PART NO. 55456-**** DETAILED DIMENSION, SEE SD-55456-010
- 梱包数量：1250個/リール
NUMBER OF CONNECTORS: 1250 PCS/REEL
- リードテープ長さ
LEAD TAPE LENGTH

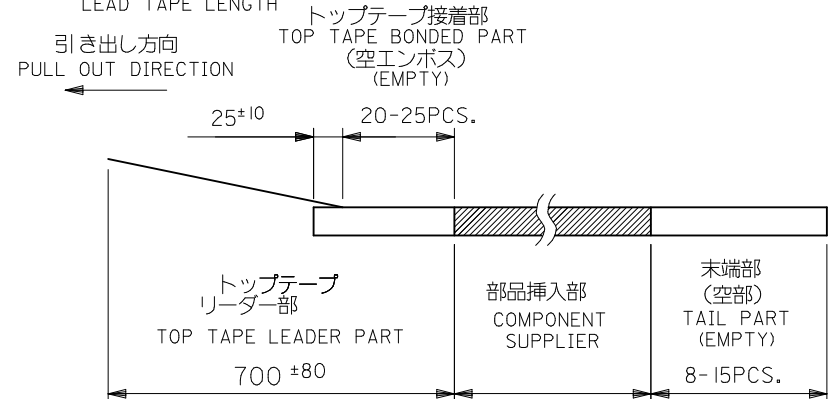

- トップテープの剥離強度：0.1~1.3 (10~130gf)
(剥離方向は下図参照)

< 剥離速度：300mm/min (参考) >

PEEL-OFF FORCE OF TOP TAPE: 0.1~1.3 (10~130gf)

(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

< PEEL-OFF SPEED: 300mm/min (REF.) >

尚、本規格値は、出荷時に適用。

(但し、輸送時に剥離が発生しない事。)


THIS RESUREMENT SHOULD BE

APPLIED AT SHIPMENT

(PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION)

- 材 料
MATERIAL
キャリアテープ：ポリプロピレン
CARRIER TAPE : POLYPROPYLENE
トップテープ：PET, PE, PP
TOP TAPE : PET, PE, PEF
リール：ポリスチレン
REEL : POLYSTYRENE

- 本製品は 55456-**19/**39/**79/**89 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 55456-**19/**39/**79/**89.

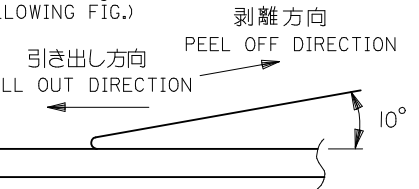

REVISED	EC NO: J2016-0718 DRAWN:SSHI MONI SHI 2016/01/27 CHKD:KOMUKAWAKI 2016/01/27 APPR:TKANEKO 2016/02/16	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			10 UNDER	± 0.2	DRAWN BY N.AIDA	DATE '05/02/04	TITLE EMBOSSD TAPE PACKAGE FOR 55456-**** -LEAD FREE-				
			10 OVER 30 UNDER	± 0.25	CHECKED BY K.TOJO	DATE '05/02/04					
			30 OVER	± 0.3	APPROVED BY N.UKITA	DATE '05/02/04					
			ANGULAR ±3 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-55456-011		SHEET NO. 1 OF 2		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

