THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	TAB SIZE	WIRE RANGE			MAX. WIRE	DIMENSIONS in. [mm]			TOOL CHART
PANDUIT PART #		ENGLISH	METRIC	COLOR	INSULATION DIAMETER	L ± [0,5]	W ± .01 [0,3]	H± (0,3)	PRESSES: CP-861, CP-862, CP-871
									APPLICATOR DIES: CA9, CA-800EZ
DNF18-110FIB	.110 X .032 [2,8 X 0,8]			RED					
DNF18-111FIB	.110 X .020 [2,8 X 0,5]	22–18	0,5-1,0	RED	.12 [3,0]	.71 [18,0]	.19 [4,8]	.15 [3,8]	CD-800-7 CD9-7A
DNF18-112FIB *	.110 X .010 [2,8 X 0,3]			NATURAL					

MAX. WIRE

\* UL/CSA STANDARDS DO NOT EXIST FOR .110 X .010 TAB SIZE

## NOTES:

В

1. USED FOR:

A. STRANDED COPPER WIRE ONLY

B. 221°F [105°C] MAX. OPERATING TEMPERATURE

C. 600V MAX. VOLTAGE RATING

D. 6-12 LBS INITIAL INSERTION/WITHDRAWAL FORCE

2. PACKAGE QTY: 3K=3000 PIECES. CONTINUOUS MOLDED STRIP CARRIER

3. MATERIAL:


A. STAMPING: CDA 260 BRASS, TIN PLATED

B. HOUSING: TYPE 66 NYLON

4. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

5. COLORS ARE TRANSLUCENT

6. WIRE STRIP LENGTH: 7/32"  $^{1/32}_{-0}$  [5,6  $^{+0,8}_{-0}$ ]

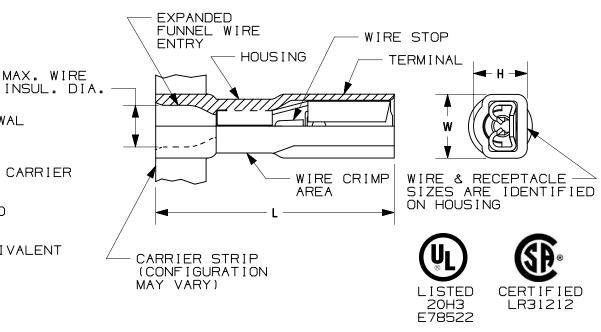

В

<b>\</b>							FEMALE DISCONNECTS, NYLON FULLY INSULATED - FUNNEL ENTRY
							CUSTOMER DRAWING
							N41168BA/09  DATASET FILE NAME
							N41168BA/09  N41168BA_DC/09A  HANDUIT
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]
							.x ± .xxx ± SEE NOTES .xx ± ANGLES ±
09	1/15	JHNU	TMR		REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	N41168BA-DC	THIRD ANGLE PROJECTION A41168
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DATE  DSM  - CHK SCALE  LCA N.T.S. SHEET 1 OF 1