
Pomona®

Model 5178 Female To Female Triaxial Bulkhead Feed Thru

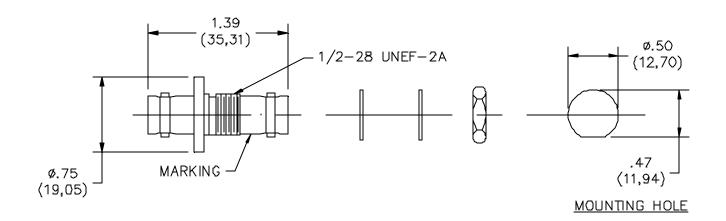

MATERIALS:

Body/Fittings: Brass, Tarnish Resistant Plating, Alloy 360, 1/2 Hard

Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Gasket: Silicon Rubber per ZZ-R-765, Class II, Grade 50

Marking: "POMONA 5178"

RATINGS:

Operating Voltage: 500 VRMS

ORDERING INFORMATION: Model 5178

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA