

30A to 150A, 3 Phase Servo System Filters



Features

- ◆ Industry Standard Size
- ◆ Easy Installation
- ◆ High Attenuation (140dB at 150kHz)





Last time buy - June 1, 2014

Specifications		MX13030	MX13050	MX13100	MX13150
Rated Voltage (AC,DC)	VAC	3 phase 250V			
Rated Current (AC,DC)	A	30	50	100	150
Test Voltage (terminal to case, AC 1 min.)	VAC	2500V			
Isolation Resistance (terminal to case, 500VDC)	Ω	100M Ohms min.			
Leakage Current	-	3.5mA max.		8mA max.	
Operating Temperature	°C	-25 to +85°C			
Operating Humidity	%	30% to 90% RH (non-condensing)			
Storage Temperature	°C	-40 to +85°C			
Storage Humidity	%	10% to 95% RH (non-condensing)			
Vibration	-	Sweep:10-55-10Hz (1min.), Amplitude 0.825mm X, Y, and Z axes, 2 hours each			
Safety Standard	-	Approved by UL1283, CSA C22.2 No.8 (C-UL), EN133200			

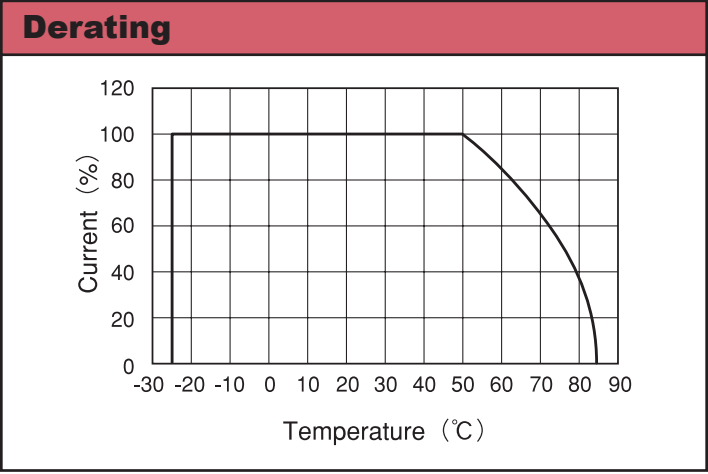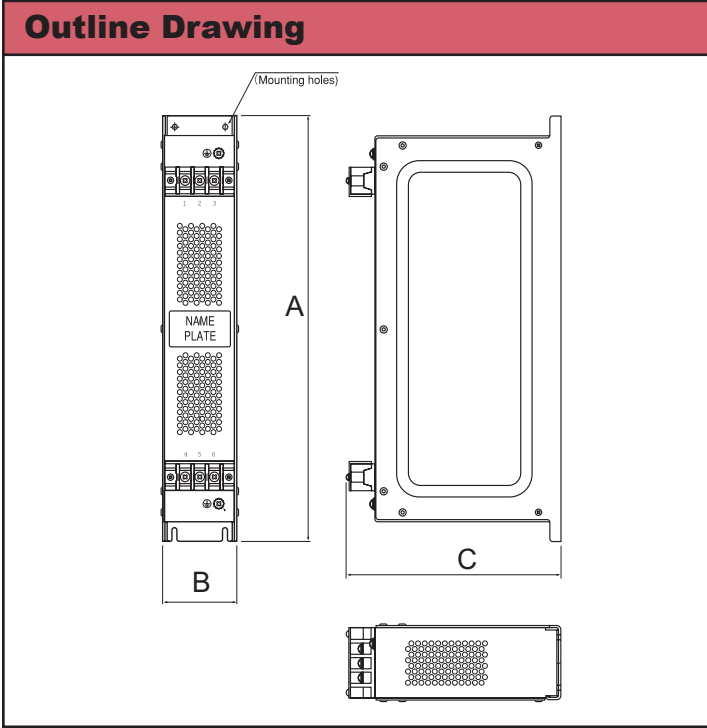

Dimensions

Model	L x H x W (mm)			Weight (g)
	A	B	C	
MX13030	380	70	195	2800
MX13050	380	85	200	3900
MX13100	380	130	200	11500
MX13150	380	165	200	16000

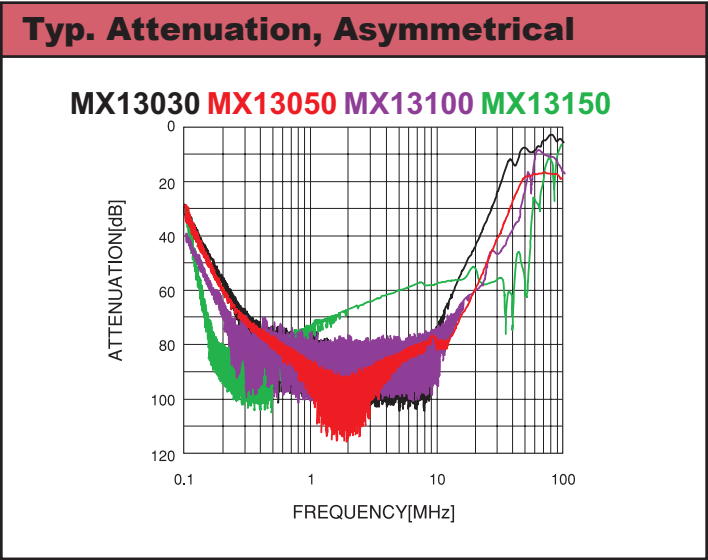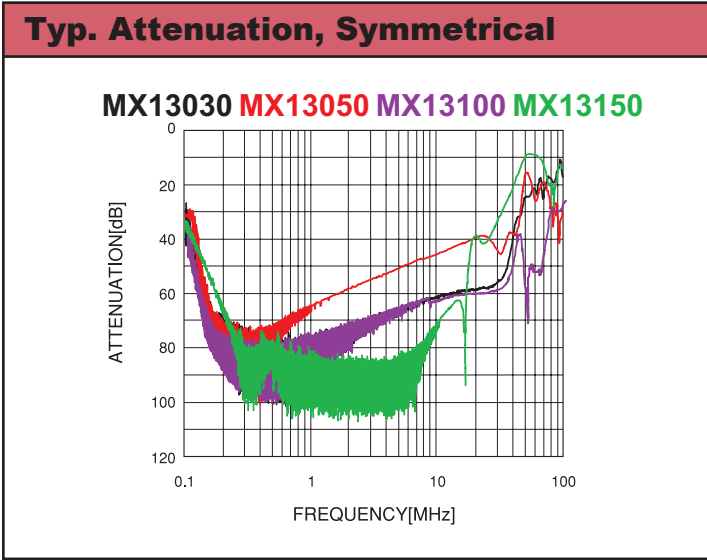

For Additional Information, please visit us.tdk-lambda.com/lp/products/mx13-series.htm



Last time buy - June 1, 2014