

ATC 200 B Series BX Ceramic Multilayer Capacitors

- Case B Size (.110" x .110")
- Low ESR/ESL
- Rugged Construction
- Capacitance Range 5000 pF to 0.1 μ F
- Mid-K
- High Reliability

ATC, the industry leader, offers new improved ESR/ESL performance for the 200 B Series Capacitors. This Series exhibits high volumetric efficiency with superior IR characteristics. Ceramic construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling and DC Blocking.

Typical circuit applications: Switching Power Supplies and High Power Broadband Coupling.

ENVIRONMENTAL TESTS

ATC 200 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:


MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.

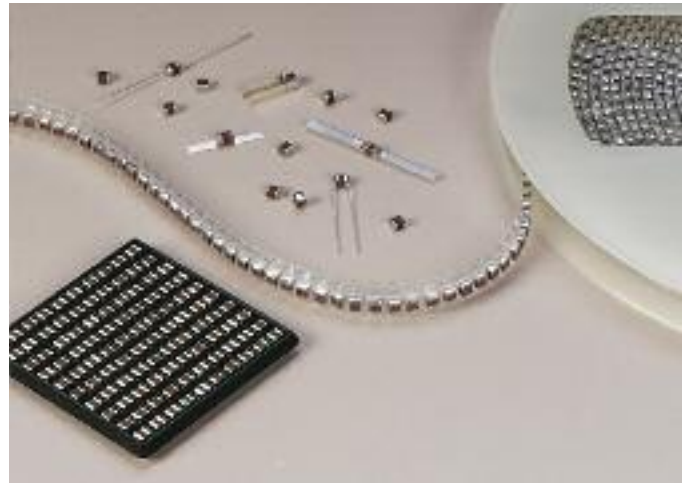

ELECTRICAL AND MECHANICAL SPECIFICATIONS

DISSIPATION FACTOR (DF): 2.5% max. @ 1 KHz

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC): \pm 15% maximum (-55°C to +125°C)

INSULATION RESISTANCE (IR):

5000 pF to 0.1 MFd:

10⁴ Megohms min. @ +25°C at rated WVDC.

10³ Megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs. (125 VDC)

AGING EFFECTS: 3% maximum per decade hour.

PIEZOELECTRIC EFFECTS: Negligible

DIELECTRIC ABSORPTION: 2% typical

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles.

See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
sales@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

ATC # 001-812 Rev. M, 9/14

ATC 200 B Capacitance Values


| CAP. CODE | CAP. (pF) | TOL. | RATED WVDC | CAP. CODE | CAP. (pF) | TOL. | RATED WVDC |
|-----------|-----------|---------|------------|-----------|-----------|---------|------------|
| 502 | 5000 | K, M, N | 50 | 273 | 27,000 | K, M, N | 50 |
| 562 | 5600 | | | 333 | 33,000 | | |
| 682 | 6800 | | | 393 | 39,000 | | |
| 822 | 8200 | | | 473 | 47,000 | | |
| 103 | 10,000 | | | 503 | 50,000 | | |
| 123 | 12,000 | | | 563 | 56,000 | | |
| 153 | 15,000 | | | 683 | 68,000 | | |
| 183 | 18,000 | | | 823 | 82,000 | | |
| 203 | 20,000 | | | 104 | 100,000 | | |
| 223 | 22,000 | | | | | | |

$VRMS = 0.707 \times WVDC$

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE.
PLEASE CONSULT FACTORY.

| CAPACITANCE TOLERANCE | | | |
|-----------------------|------|------|------|
| Code | K | M | N |
| Tol. | ±10% | ±20% | ±30% |

ATC PART NUMBER CODE

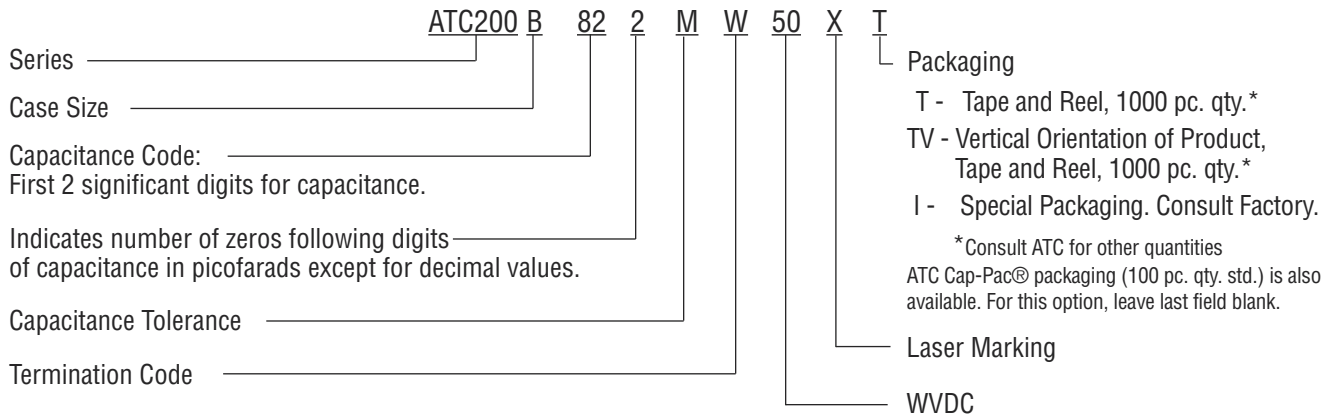

The above part number refers to a 200 B Series (case size B) 8200 pF capacitor, M tolerance (±20%), 50 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Cap-Pac® packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 200 B Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | | | |
|------------------------|----------------|--------------------------------|--|--|----------------------------|----------------------------|--|--|-----|-------------------------------|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS | | |
| 200B | W | B Solder Plate | | .110 +.020 -.010 (2.79 +0.51 -0.25) | .110 ±.015 (2.79 ±0.38) | .102 (2.59) max. | .015 (0.38) ±.010 (0.25) | Tin/Lead, Solder Plated over Nickel Barrier Termination | | |
| 200B | P | B Pellet | | .110 +.035 -.010 (2.79 +0.89 -0.25) | .110 ±.015 (2.79 ±0.38) | | | Heavy Tin/Lead Coated, over Nickel Barrier Termination | | |
| 200B | T | B Solderable Nickel Barrier | | .110 +.020 -.010 (2.79 +0.51 -0.25) | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Tin Plated over Nickel Barrier Termination | | |
| 200B | CA | B Gold Chip | | .110 +.020 -.010 (2.79 +0.51 -0.25) | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Gold Plated over Nickel Barrier Termination | | |
| 200B | MS | B Microstrip | | .135 ±.015 (3.43 ±0.38) | .110 ±.015 (2.79 ±0.38) | | | .120 (3.05) max. | N/A | Length (L _L) |
| 200B | AR | B Axial Ribbon | | | | .250 (6.35) min. | .093 ±.005 (2.36 ±0.13) | | | .004 ±.001 (.102 ±.025) |
| 200B | RR | B Radial Ribbon | | | | .145 ±.020 (3.68 ±0.51) | .100 (2.54) max. | | | N/A |
| 200B | RW | B Radial Wire | | | | | | | | |
| 200B | AW | B Axial Wire | | | | | | | | |

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant. For a complete military catalog, request American Technical Ceramics document ATC 001-818.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 200 B Capacitors: Non-Magnetic Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | CASE SIZE & TYPE | OUTLINES W/T IS A TERMINATION SURFACE | BODY DIMENSIONS INCHES (mm) | | | LEAD AND TERMINATION DIMENSIONS AND MATERIALS | | | |
|------------------------|----------------|------------------------------|--|--|----------------------------|------------------------|---|---|-------------------------------|-------------------------------|
| | | | | LENGTH (L) | WIDTH (W) | THICKNESS (T) | OVERLAP (Y) | MATERIALS | | |
| 200B | WN | B Non-Mag Solder Plate | | .110 +.025 -.010 (2.79 +0.64 -0.25) | .110 ±.015 (2.79 ±0.38) | .102 (2.59) max. | .015 (0.38) ±.010 (0.25) | Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination | | |
| 200B | PN | B Non-Mag Pellet | | .110 +.035 -.010 (2.79 +0.89 -0.25) | .110 ±.015 (2.79 ±0.38) | | | Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination | | |
| 200B | TN | B Non-Mag Solderable Barrier | | .110 +.025 -.010 (2.79 +0.64 -0.25) | .110 ±.015 (2.79 ±0.38) | | | RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination | | |
| 200B | MN | B Non-Mag Microstrip | | .135 ±.015 (3.43 ±0.38) | .110 ±.015 (2.79 ±0.38) | .120 (3.05) max. | N/A | Length (L _L) | Width (W _L) | Thickness (T _L) |
| 200B | AN | B Non-Mag Axial Ribbon | | | | | | .250 (6.35) min. | .093 ±.005 (2.36 ±0.13) | .004 ±.001 (.102 ±.025) |
| 200B | FN | B Non-Mag Radial Ribbon | | | | | | .145 ±.020 (3.68 ±0.51) | .100 (2.54) max. | .500 (12.7) min. |
| 200B | RN | B Non-Mag Radial Wire | | .145 ±.020 (3.68 ±0.51) | .100 (2.54) max. | .500 (12.7) min. | #26 AWG., .016 (.406) dia. nominal | | | |
| 200B | BN | B Non-Mag Axial Wire | | | | | | | | |

Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case B Vertical Mount

| | Pad Size | A Min. | B Min. | C Min. | D Min. |
|------------|--------------|--------|--------|--------|--------|
| All values | Normal | .120 | .050 | .075 | .175 |
| | High Density | .100 | .030 | .075 | .135 |

Horizontal Mount

| | Pad Size | A Min. | B Min. | C Min. | D Min. |
|------------|--------------|--------|--------|--------|--------|
| All values | Normal | .130 | .050 | .075 | .175 |
| | High Density | .110 | .030 | .075 | .135 |

Dimensions are in inches.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com


ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com


www.atceramics.com

ATC 200 B Performance Data


**ESR VS. CAPACITANCE
ATC SERIES 200, CASE B**

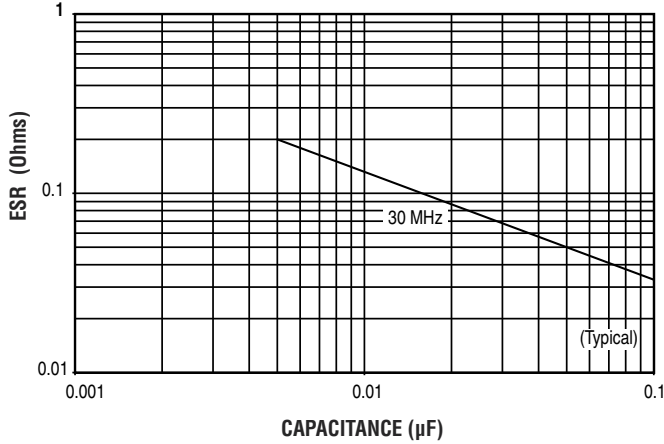


**Q VS. CAPACITANCE
ATC SERIES 200, CASE B**

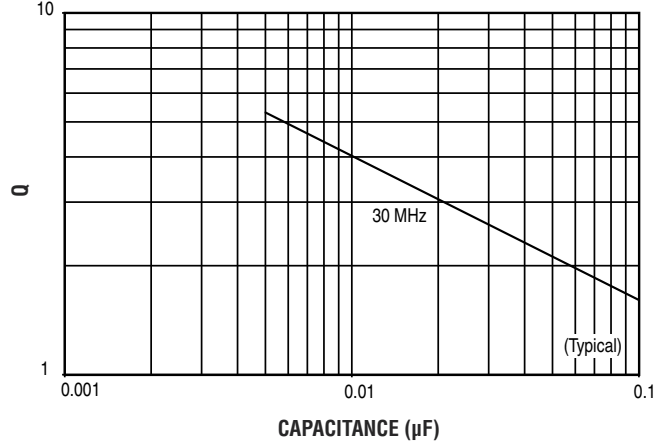

**SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 200, CASE B**

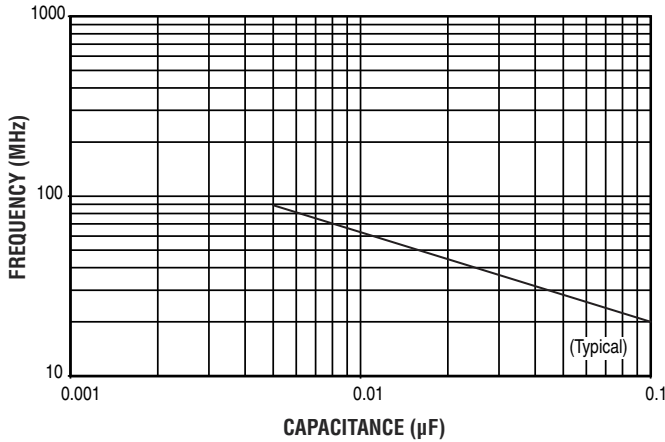

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 200, CASE B**

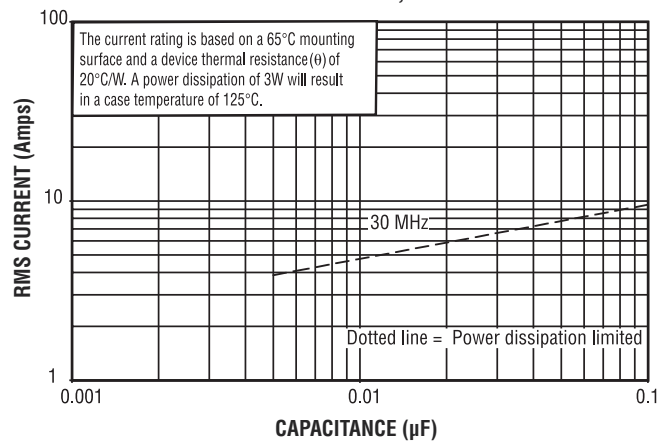

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com

ATC Asia
sales@atceramics-asia.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-812 Rev. M. 9/14



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
sales@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com