





MOLEX P/N	LENGTH m	MTP CONN. TYPE
106267-3000	0.30 +0.10/-0	MALE
106267-3001		FEMALE
106267-3002	1.00 +0.20/-0	MALE
106267-3003		FEMALE

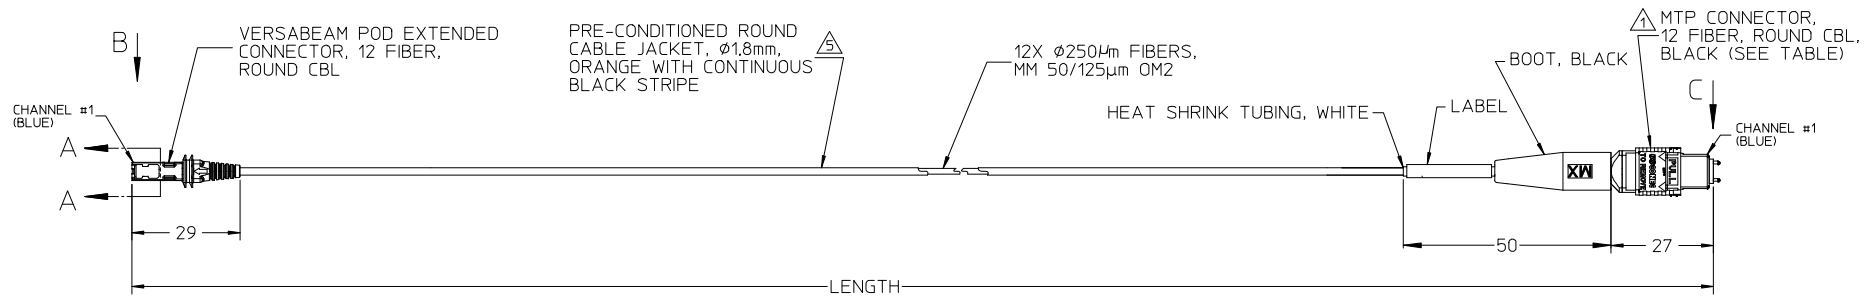

VIEW B
SCALE 2.5:1



SECTION A-A
SCALE 5:1



VIEW C
SCALE 2.5:1

- NOTES:
- DUST CAPS ARE NOT SHOWN BUT INCLUDED. MALE CONNECTOR IS SHOWN. FEMALE CONNECTOR DOES NOT CONTAIN PINS.
 - LABEL IS PRINTED WITH MOLEX NAME, MOLEX P/N AND SERIAL NUMBER.
 - INSERTION LOSS @ 850nm TO AN INTERPOSER: 2.0 dB. THROUGHPUT LOSS (MTP+VERSABEAM POD): 1.2dB. TEST DATA IS SENT WITH JUMPER.
 - ALL EXPOSED MATERIALS MEET UL94 V-0. CABLE RATING - OFNG-LS.
 - TO PREVENT FIBER TWIST DURING INSTALLATION, USE BLACK STRIPE ON JACKET AS A REFERENCE OF THE CABLE/FIBER ORIENTATION.
 - THE 1.8mm JACKET IS FOR FIBER PROTECTION FOR ON-BOARD APPLICATIONS. THE TRANSITION FROM THE MTP TO 1.8mm CABLE ACTS AS A BEND LIMITER AND DOES NOT PROVIDE MECHANICAL STRAIN RELIEF.

ENTER DESCRIPTION EC NO: MF2015-0386 DRWN: MAGHAYERE 2015/01/20 CHKD: APPR: IGUMIN 2015/01/29	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± ±	mm INCH ± --- ± --- ± --- ± --- ± --- ± --- ± ±	DRAWN BY DATE KPEVZNER 2012/02/22 CHECKED BY DATE	TITLE 1.8MM VERSABEAM POD TO MTP MM50UM 12F ROUND CABLE JUMPER			
9 REV	DESCRIPTION	APPROVED BY DATE IGUMIN 2012/02/23	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-106267-3000	SHEET NO. 1 OF 1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	