

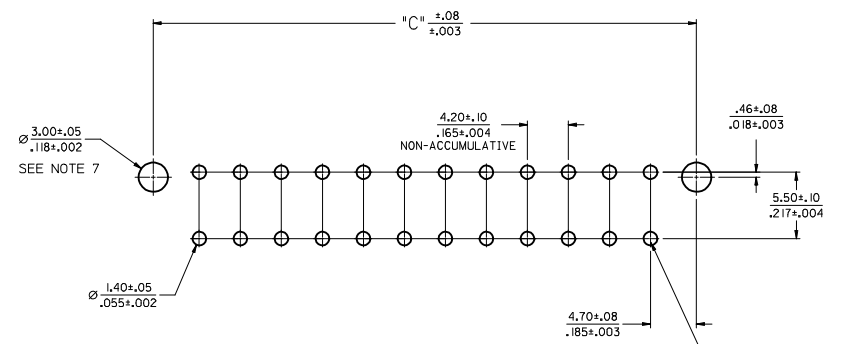


MATERIAL NUMBER	CKT SIZE	DRAIN HOLES	MOUNTING OPTION	FINISH	HOUSING MATERIAL
44206-0001	24 CKT.	WITH	BOTH PEGS	A	A
44206-0002	24 CKT.	WITH	NO PEGS	A	A
44206-0005	8 CKT.	WITH	PEG 2 ONLY	A	A
44206-0006	8 CKT.	WITH	NO PEGS	A	A
44206-0007	24 CKT.	WITH	PEG 2 ONLY	A	A

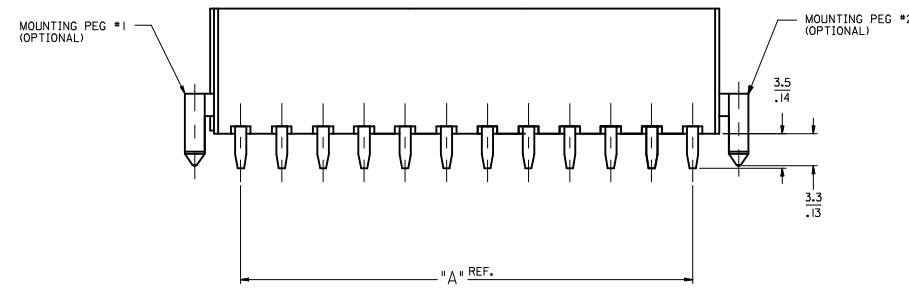

- NOTES:
- HOUSING MATERIAL:  
 A - NYLON 6/6, U.L. 94V-2, COLOR: NATURAL.  
 B - NYLON 6/6, U.L. 94V-0, COLOR: NATURAL.  
 TERMINAL MATERIAL: BRASS ALLOY
  - FINISH  
 A - .000035/(.00090) MIN. BRIGHT TIN OVER .000020/(.00050) MIN. COPPER.  
 B - .000030/(.00076) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN. OVER .000050/(.00127) MIN. NICKEL OVERALL.  
 C - .000015/(.00038) MIN. SELECT GOLD AND .000100/(.00254) MIN. SELECT MATTE TIN. OVER .000050/(.00127) MIN. NICKEL OVERALL.
  - PRODUCT SPECIFICATION: PS-5556-001.
  - PACKAGING SPECIFICATION: PK-44206-001.
  - PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
  - MOUNTING OPTIONS: SEE CHART
  - LOCATION OF 3.00/(.118) DIA. HOLES ON P.C. BOARD IS FOR OPTIONAL PEGS.
  - CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
  - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
  - PARTS ARE NOT DESIGNED FOR CURRENT SHARING.

RECOMMENDED HOLE LAYOUT FOR .070/(1.78) MAX. THICK P.C. BOARD  
(SEE NOTE 6)

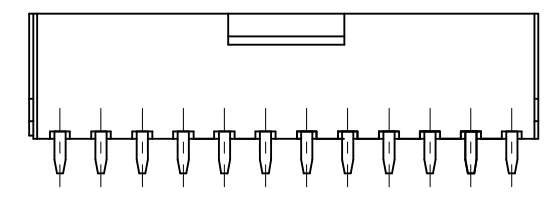

44206 SERIES  
(SHOWN WITHOUT MOUNTING PEGS)

CIRCUIT SIZE	DIM. "A"	DIM. "B"	DIM. "C"
8	.50 (12.6)	.71 (18.0)	.866 (22.00)
10	.66 (16.8)	.87 (22.2)	1.031 (26.20)
12	.83 (21.0)	1.04 (26.4)	1.197 (30.40)
14	.99 (25.2)	1.20 (30.6)	1.362 (34.60)
16	1.16 (29.4)	1.37 (34.8)	1.528 (38.80)
18	1.32 (33.6)	1.54 (39.0)	1.693 (43.00)
20	1.49 (37.8)	1.70 (43.2)	1.858 (47.20)
22	1.65 (42.0)	1.87 (47.4)	2.024 (51.40)
24	1.82 (46.2)	2.03 (51.6)	2.189 (55.60)

<b>ADD NOTES 4.9.10</b> E.C. NO. UCP2015-3048 DRAWINGS 2015/01/29 CHKD: [Signature] APPR: FSWITH 2015/02/03	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .013</td> <td>± .001</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td>± .01</td> </tr> <tr> <td>1 PLACE</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>0 PLACE</td> <td>± .005</td> <td>± .0005</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± .005	± .0005	3 PLACES	± .013	± .001	2 PLACES	± 0.25	± .01	1 PLACE	± .005	± .0005	0 PLACE	± .005	± .0005	DIMENSION STYLE <b>MM/IN</b> SCALE <b>4:1</b> DESIGN UNITS <b>METRIC</b> THIRD ANGLE PROJECTION	DRAWN BY L. MOSLEY DATE 07/03/98 CHECKED BY BANDURA DATE 07/03/98 APPROVED BY EDGLEY DATE 07/03/98	TITLE <b>MINI-FIT JR. VERTICAL          HEADER ASSEMBLY W/WO          PEGS, WITH DRAIN HOLES</b> <b>molex</b> MATERIAL NO. <b>SEE CHART</b> DOCUMENT NO. <b>SDA-44206-001</b>	SHEET NO. <b>1 OF 1</b>
		mm	INCH																					
	4 PLACES	± .005	± .0005																					
	3 PLACES	± .013	± .001																					
2 PLACES	± 0.25	± .01																						
1 PLACE	± .005	± .0005																						
0 PLACE	± .005	± .0005																						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																								
ANGULAR ±1/2°																								