



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# FTCO3V455A1

## 3-Phase Inverter Automotive Power Module

### General Description

The FTCO3V455A1 is a 40V low Rds(on) automotive qualified power module featuring a 3-phase MOSFET inverter optimized for 12V battery systems. It includes a precision shunt resistor for current sensing an NTC for temperature sensing and an RC snubber circuit.

The module utilizes Fairchild's trench MOSFET technology and it is designed to provide a very compact and high performance variable speed motor drive for applications like electric power steering, electro-hydraulic power steering, electric water pumps, electric oil pumps. The power module is 100% lead free, RoHS and UL compliant.

### Benefits

- Low junction-sink thermal resistance
- Low inverter electrical resistance
- High current handling
- Compact motor design
- Highly integrated compact design
- Better EMC and electrical isolation
- Easy and reliable installation
- Improved overall system reliability

### Applications

- Electric and Electro-Hydraulic Power Steering
- Electric Water Pump
- Electric Oil Pump
- Electric Fan

### Features

- 40V-150A 3-phase trench MOSFET inverter bridge
- 1% precision shunt current sensing
- Temperature sensing
- DBC substrate
- 100% lead free and RoHS compliant 2000/53/C directive.
- UL94V-0 compliant
- Isolation rating of 2500Vrms/min
- Mounting through screws
- Automotive qualified

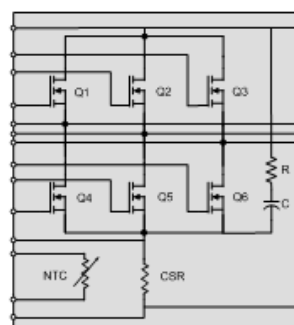


Figure 1.schematic

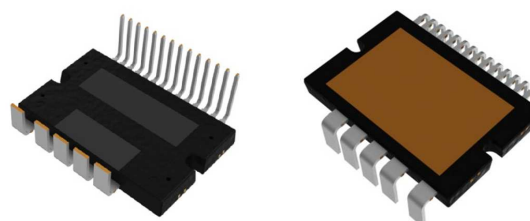
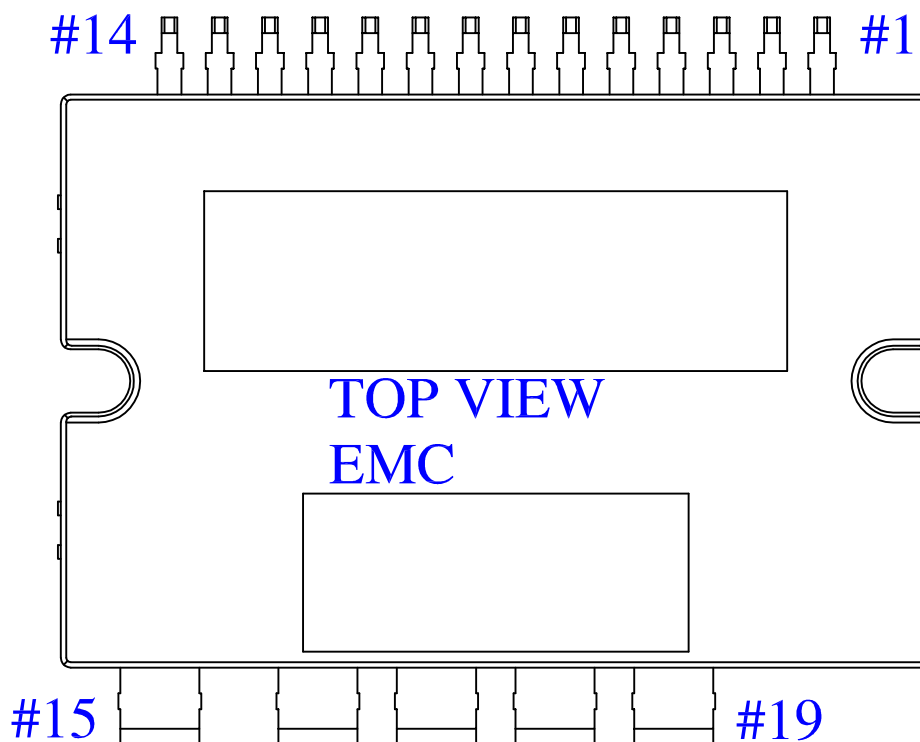


Figure 2. package

### Absolute Maximum Ratings (T<sub>J</sub> = 25°C, Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
V <sub>DS</sub> (Q1~Q6)	Drain to Source Voltage	40	V
V <sub>GS</sub> (Q1~Q6)	Gate to Source Voltage	±20	V
I <sub>D</sub> (Q1~Q6)	Drain Current Continuous(T <sub>C</sub> = 25°C, V <sub>GS</sub> = 10V)	150	A
E <sub>AS</sub> (Q1~Q6)	Single Pulse Avalanche Energy (*Note 1)	947	mJ
P <sub>D</sub>	Power dissipation	115	W
T <sub>J</sub>	Maximum Junction Temperature	175	°C
T <sub>STG</sub>	Storage Temperature	125	°C

## Pin Configuration



**Figure 3.**

## Pin Description

Pin Number	Pin Name	Pin Descriptions
1	TEMP 1	NTC Thermistor Terminal 1
2	TEMP 2	NTC Thermistor Terminal 2
3	PHASE W SENSE	Source of HS W and Drain of LS W
4	GATE HS W	Gate of HS phase W MOSFET
5	GATE LS W	Gate of LS phase W MOSFET
6	PHASE V SENSE	Source of HS V and Drain of LS V
7	GATE HS V	Gate of HS phase V MOSFET
8	GATE LS V	Gate of LS phase V MOSFET
9	PHASE U SENSE	Source of HS U and Drain of LS U
10	GATE HS U	Gate of HS phase U MOSFET
11	VBAT SENSE	Drain of HS U, V and W MOSFET
12	GATE LS U	Gate of LS phase U MOSFET
13	SHUNT P	Source of LS U, V W MOSFETS / Shunt +
14	SHUNT N	Negative shunt terminal (shunt -)
15	VBAT	Positive battery terminal
16	GND	Negative battery terminal
17	PHASE U	Motor phase U
18	PHASE V	Motor phase V
19	PHASE W	Motor phase W

# Internal Equivalent Circuit

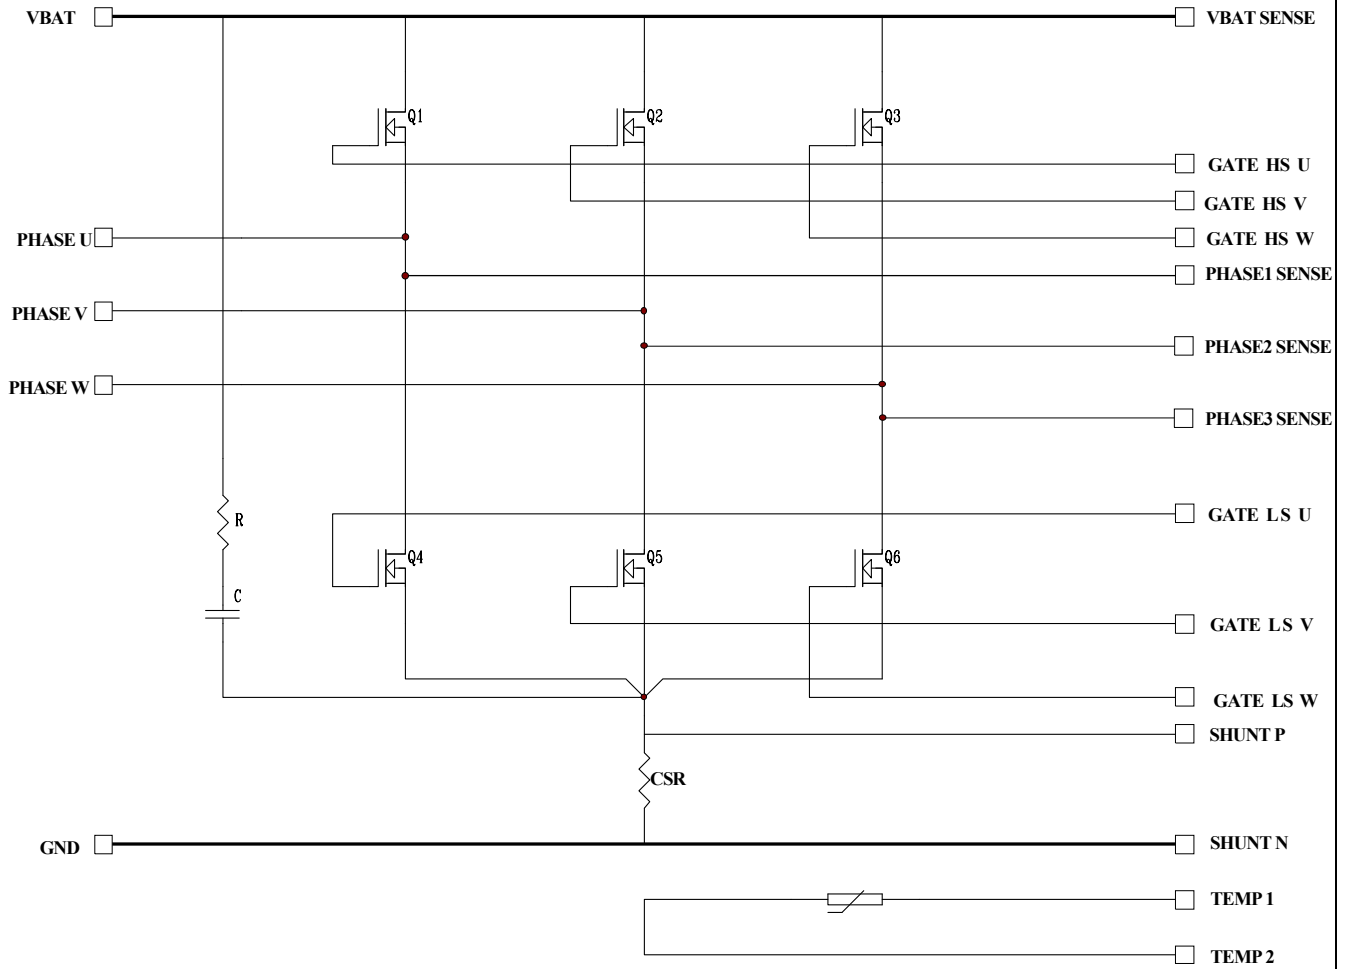


Figure 4.

## Flammability Information

All materials present in the power module meet UL flammability rating class 94V-0 or higher.

## Solder

Solder used is a lead free SnAgCu alloy.

## Compliance to RoHS

The Power Module is 100% lead free and RoHS compliant with the 2000/53/C directive.

**Absolute Maximum Ratings** ( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
$V_{DS}(Q1\sim Q6)$	Drain to Source Voltage	40	V
$V_{GS}(Q1\sim Q6)$	Gate to Source Voltage	$\pm 20$	V
$I_D(Q1\sim Q6)$	Drain Current Continuous ( $T_C = 25^\circ\text{C}$ , $V_{GS} = 10\text{V}$ )	150	A
$E_{AS}(Q1\sim Q6)$	Single Pulse Avalanche Energy (*Note 1)	947	mJ
$P_D$	Power dissipation	115	W
$T_J$	Maximum Junction Temperature	175	$^\circ\text{C}$
$T_{STG}$	Storage Temperature	125	$^\circ\text{C}$

**Thermal Resistance**

Symbol	Parameter	Min.	Typ.	Max.	Unit
R <sub>thjs</sub> Thermal Resistance Junction to case, Single Inverter FET, PKG center (*Note 2)	Q1 Thermal Resistance J -C	-	1.3	1.7	$^\circ\text{C/W}$
	Q2 Thermal Resistance J -C	-	1.3	1.7	$^\circ\text{C/W}$
	Q3 Thermal Resistance J -C	-	1.3	1.7	$^\circ\text{C/W}$
	Q4 Thermal Resistance J -C	-	1.2	1.6	$^\circ\text{C/W}$
	Q5 Thermal Resistance J -C	-	1.2	1.6	$^\circ\text{C/W}$
	Q6 Thermal Resistance J -C	-	1.2	1.6	$^\circ\text{C/W}$
$T_J$	Maximum Junction Temperature	-		175	$^\circ\text{C}$
$T_S$	Operating Sink Temperature	-40		120	$^\circ\text{C}$
$T_{STG}$	Storage Temperature	-40		125	$^\circ\text{C}$

**Notes:**

\* Note 1 - Starting  $T_J=25^\circ\text{C}$ ,  $V_{ds}=20\text{V}$ ,  $I_{as}=64\text{A}$ ,  $L=480\mu\text{H}$ .

\* Note 2 - These values are based on Thermal simulations and PV level measurements.

These values assume a single MOSFET is on, and the test condition for referenced temperature is "Package Center".

This means that the DT is measured between the  $T_J$  of each MOSFET and the bottom surface temperature immediately under the thermal media in the center of the package.

**Electrical Characteristics** ( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
$BV_{DSS}$	D-S Breakdown Voltage (Inverter MOSFETs)	$V_{GS}=0, I_D=250\mu\text{A}$	40	-	-	V
$V_{GS}$	Gate to Source Voltage (Inverter MOSFETs)	-	-20	-	20	V
$V_{TH}$	Threshold Voltage (Inverter MOSFETs)	$V_{GS}=V_{DS}, I_D=250\mu\text{A}, T_J=25^\circ\text{C}$	2.0	2.8	4.0	V
$V_{SD}$	MOSFET Body Diode Forward Voltage	$V_{GS}=0\text{V}, I_S=80\text{A}, T_J=25^\circ\text{C}$		0.8	1.28	V
$R_{DS(ON)Q1}$	Inverter High Side MOSFETs Q1 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.15	1.66	$\text{m}\Omega$
$R_{DS(ON)Q2}$	Inverter High Side MOSFETs Q2 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.22	1.73	$\text{m}\Omega$
$R_{DS(ON)Q3}$	Inverter High Side MOSFETs Q3 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.31	1.82	$\text{m}\Omega$
$R_{DS(ON)Q4}$	Inverter Low Side MOSFETs Q4 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.36	1.87	$\text{m}\Omega$
$R_{DS(ON)Q5}$	Inverter Low Side MOSFETs Q5 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.57	2.08	$\text{m}\Omega$
$R_{DS(ON)Q6}$	Inverter Low Side MOSFETs Q6 (See *Note3)	$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	1.86	2.32	$\text{m}\Omega$
$I_{DSS}$	Inverter MOSFETs (UH,UL,VH,VL,WH,WL)	$V_{GS}=0\text{V}, V_{DS}=32\text{V}, T_J=25^\circ\text{C}$	-	-	1.0	$\mu\text{A}$
$I_{GSS}$	Inverter MOSFETs Gate to Source Leakage Current	$V_{GS}=\pm 20\text{V}$	-	-	$\pm 100$	nA
Total loop resistance VLINK(+) - V0 (-)		$V_{GS}=10\text{V}, I_D=80\text{A}, T_J=25^\circ\text{C}$	-	4.69	5.5	$\text{m}\Omega$

\* Note 3 - All Mosfets have same die size and Rdson. The different Rdson values listed in the datasheet are due to the different access points available inside the module for Rdson measurement. While the high side MOSFETs (Q1, Q2, Q3) have source sense wire bonds, the low side mosfets (Q4, Q5, Q6) do not have source sense wire bonds, thus resulting in higher Rdson values.

**Temperature Sense (NTC Thermistor)**

Symbol	Test Conditions	Test Time	Min	Typ	Max	Units
Voltage	Current=1mA, Temperature=25°C	T=0.5ms	7.5	-	12	V

**Current Sense Resistor**

Symbol	Test Conditions	Test Time	Min	Typ	Max	Units
Resistance	Current Senset resistor current = 80A	T=0.5ms	0.46	-	0.53	$\text{m}\Omega$

# Typical Characteristics (Generated using MOSFETs assembled in a TO263 package, for reference purposes only)


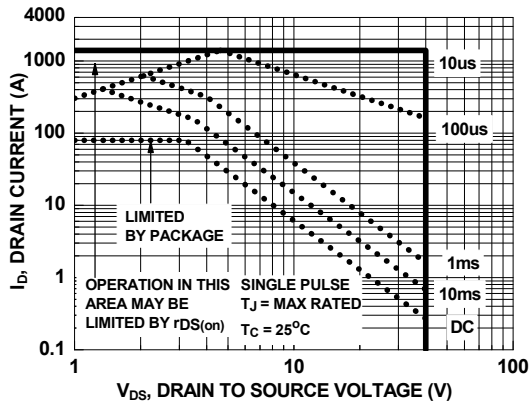


Figure 5. Forward Bias Safe Operating Area

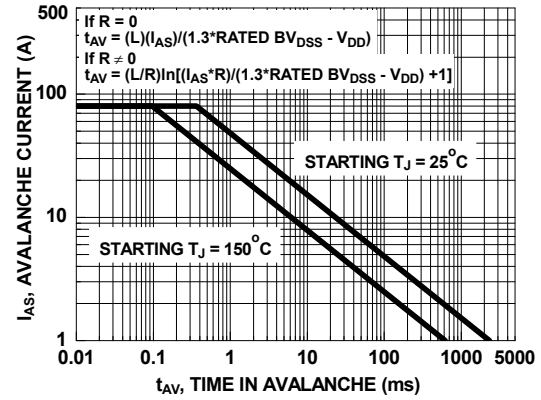

NOTE: Refer to Fairchild Application Notes AN7514 and AN7515

Figure 6. Unclamped Inductive Switching Capability

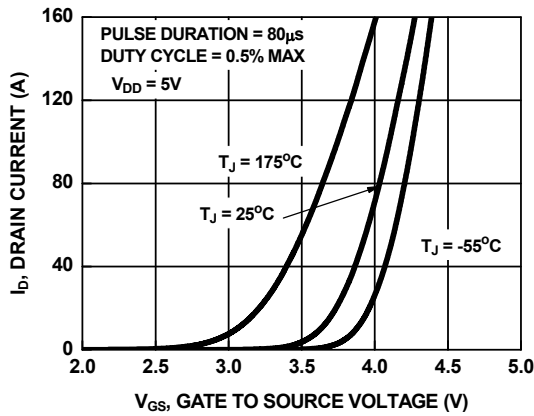


Figure 7. Transfer Characteristics

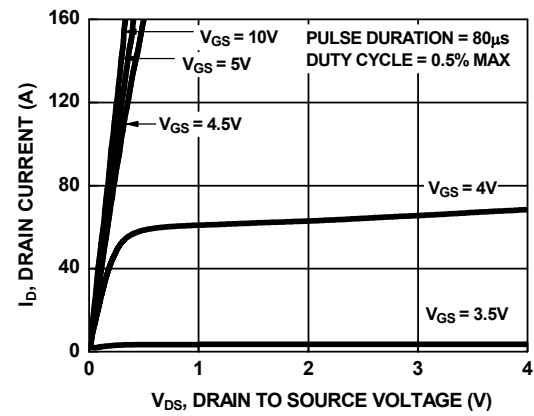


Figure 8. Saturation Characteristics

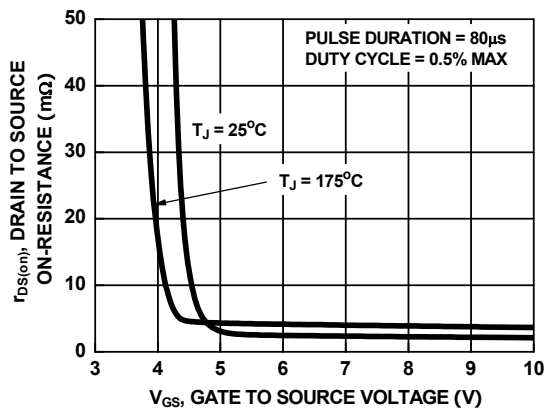


Figure 9. Drain to Source On-Resistance Variation vs Gate to Source Voltage

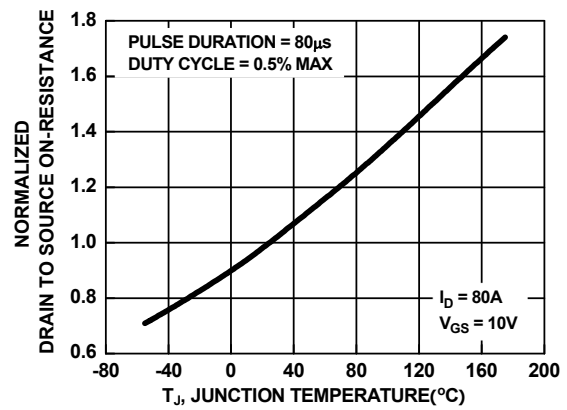


Figure 10. Normalized Drain to Source On-Resistance vs Junction Temperature



**Typical Characteristics** (Generated using MOSFETs assembled in a TO263 package, for reference purposes only)

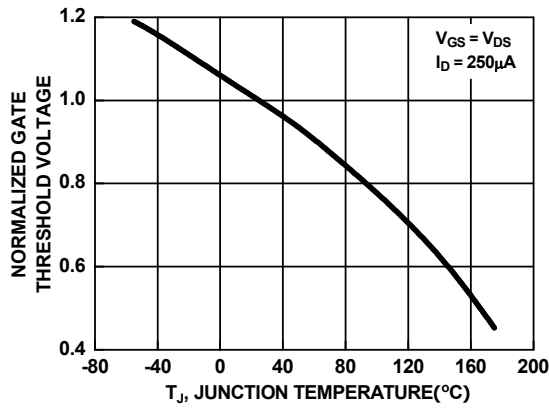


Figure 11. Normalized Gate Threshold Voltage vs Junction Temperature

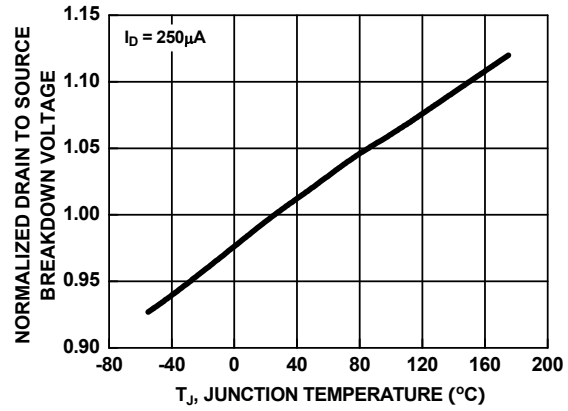


Figure 12. Normalized Drain to Source Breakdown Voltage vs Junction Temperature

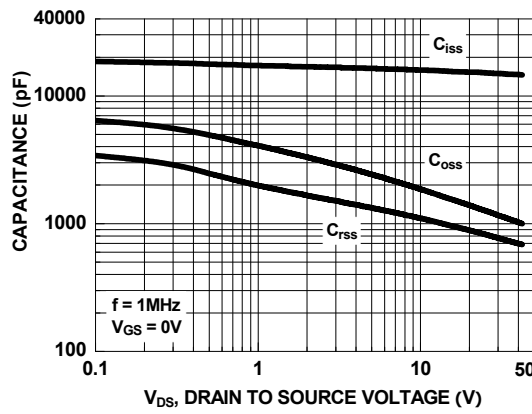


Figure 13. Capacitance vs Drain to Source Voltage


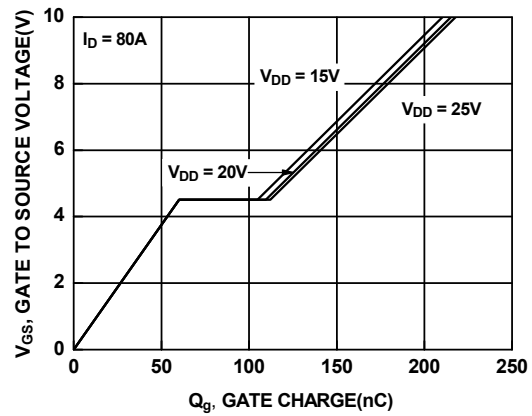


Figure 14. Gate Charge vs Gate to Source Voltage

## Mechanical Characteristics and Ratings

Parameter	Condition	Limits			Unit
		Min.	Typ.	Max.	
Device Flatness	Note Fig.15	0	-	+200	um
Mounting Torque	Mounting Screw: - M3, Recommended 0.7N.m	0.6	0.7	0.8	N.m
Weight		-	20	-	g

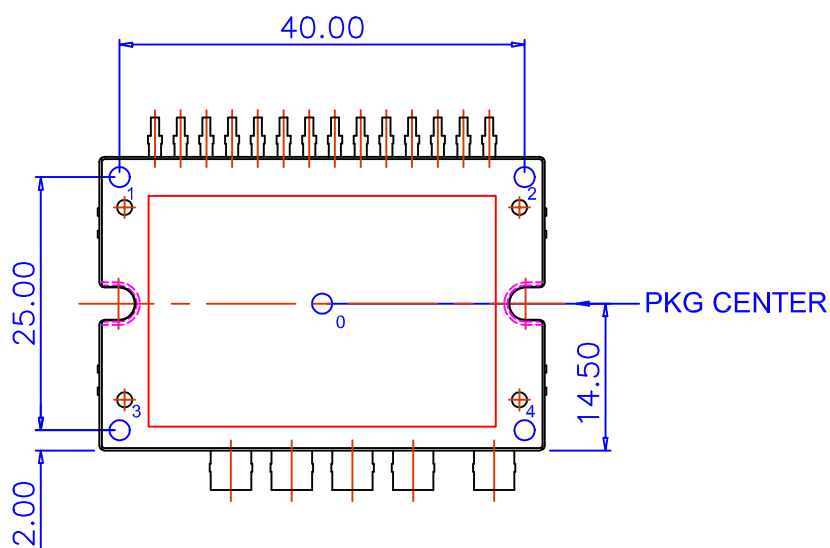

FLATNESS : MAX. 200um

— MEASURING AT INDICATING POINTS  
1, 2, 3, AND 4 (BASED ON "0")

**Fig. 15. Flatness Measurement Position**

## Package Marking and Ordering Information

Device Marking	MOSFET	Packing Type	Quantity
FTCO3V455A1	PCF33478	Tube	11

Detailed Package Outline Drawings

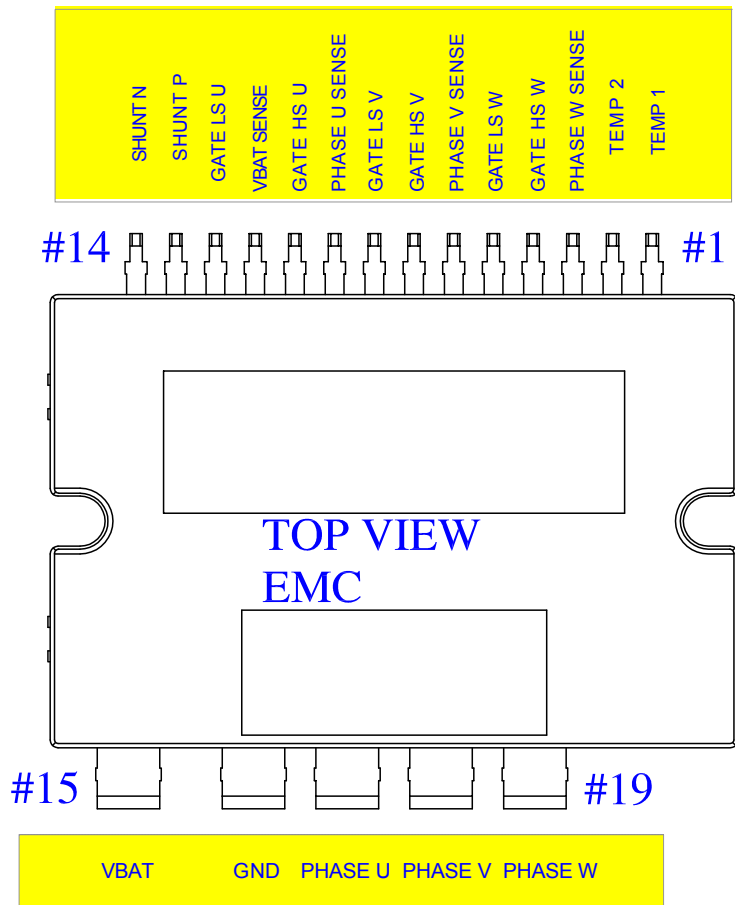


Figure 16.

## Detailed Package Outline Drawings

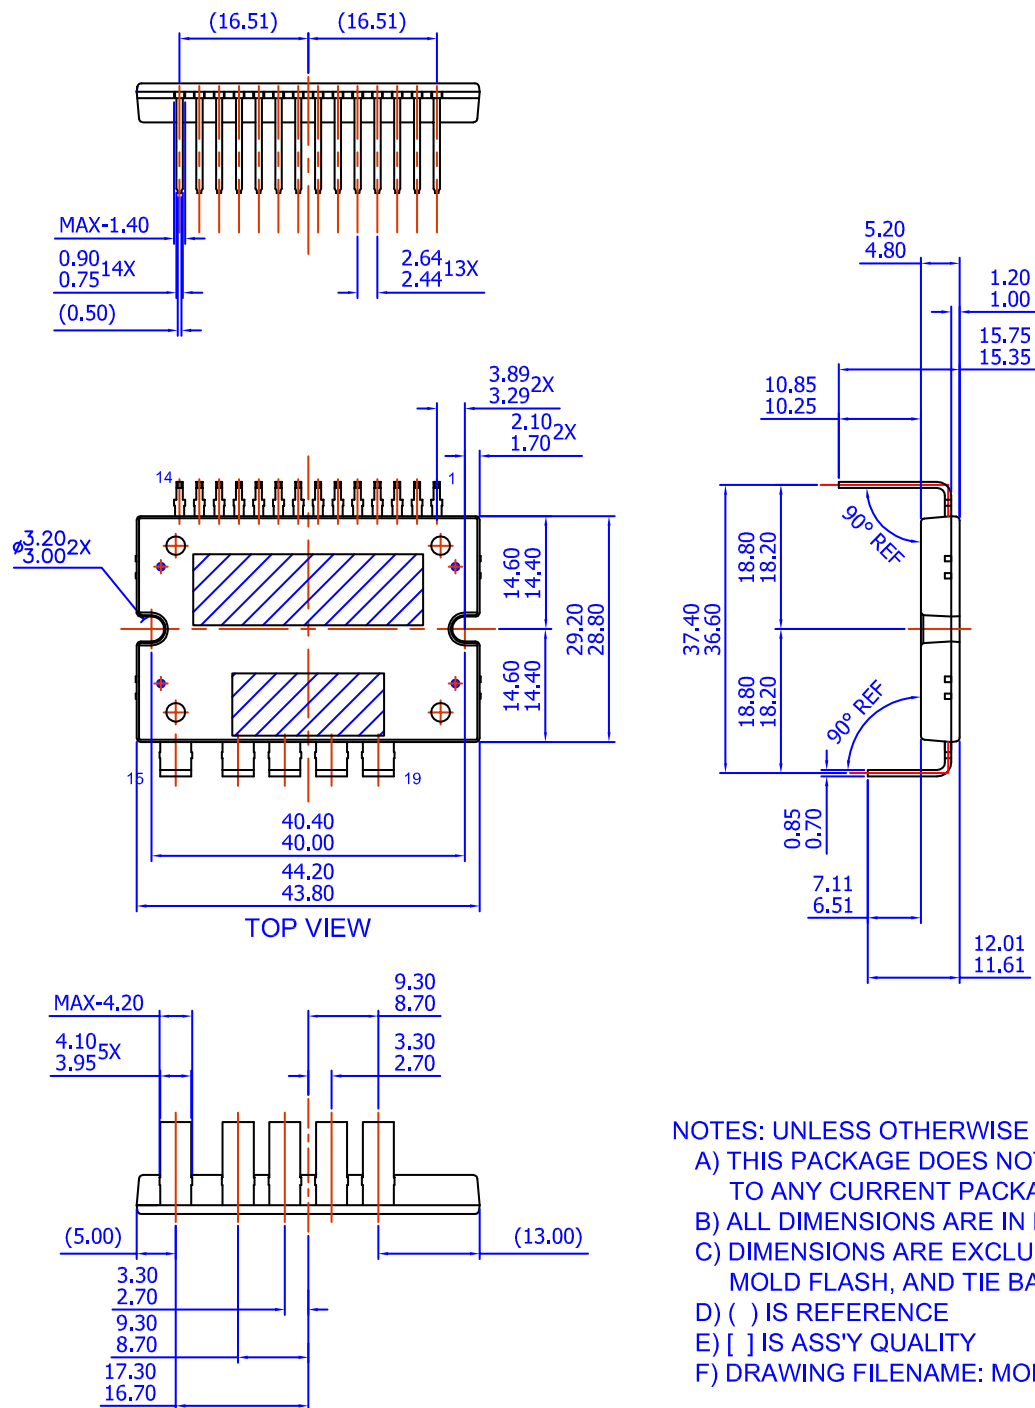


Figure 17.



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

2Cool™  
AccuPower™  
AX-CAP™\*  
BitSiC®  
Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
DEUXPEED®  
Dual Cool™  
EcoSPARK®  
EfficientMax™  
ESBC™



Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FETBench™  
FlashWriter®\*  
FPS™

F-PFS™  
FRFET®  
Global Power Resource™  
Green Bridge™  
Green FPS™  
Green FPS™ e-Series™  
Gmax™  
GTO™  
IntelliMAX™  
ISOPANAR™  
Marking Small Speakers Sound Louder and Better™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MicroPak2™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
mWSaver™  
OptoHiT™  
OPTOLOGIC®  
OPTOPLANAR®



PowerTrench®  
PowerXS™  
Programmable Active Droop™  
QFET®  
QS™  
Quiet Series™  
RapidConfigure™  
TM  
Saving our world, 1mW/W/kW at a time™  
SignalWise™  
SmartMax™  
SMART START™  
Solutions for Your Success™  
SPM®  
STEALTH™  
SuperFET®  
SuperSOT™-3  
SuperSOT™-6  
SuperSOT™-8  
SupreMOS®  
SyncFET™  
Sync-Lock™  
SYSTEM®\*  
GENERAL

The Power Franchise®  
the power®  
franchise  
TinyBoost™  
TinyBuck™  
TinyCalc™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyPWM™  
TinyWire™  
TranSiC®  
TriFault Detect™  
TRUECURRENT®\*  
µSerDes™  
SerDes®  
UHC®  
Ultra FRFET™  
UniFET™  
VCX™  
VisualMax™  
VoltagePlus™  
XS™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.Fairchildsemi.com](http://www.Fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative