


VICOR CONFIDENTIAL
 THIS DOCUMENT AND THE DATA DISCLOSED
 HEREIN OR HEREWITH IS NOT TO BE REPRODUCED,
 USED, OR DISCLOSED IN WHOLE OR IN PART
 TO ANYONE WITHOUT PERMISSION OF VICOR CORP.


REV	DESCRIPTION	DATE	APPROVED
A	RELEASED PER ECO E990481	GCK 5/19/99	RCM

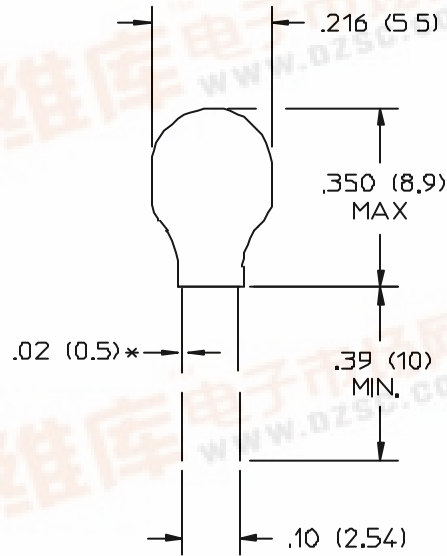

DIMENSIONS - INCHES (MM)
 * LEAD TOLERANCE = ±.015*(±.38MM)

ELECTRICAL CHARACTERISTICS
 TEMPERATURE RANGE: -55°C - +85°C
 CAPACITANCE TESTED @ 120 Hz -
 10µF, 25V, 20% @ 85°C, 16.5V @ 125°C
 D.C. - LEAKAGE @ 25°C = 2.0µA
 MAX. DISSIPATION FACTOR = 6% @ 25°C, 120Hz

CAPACITOR MARKINGS

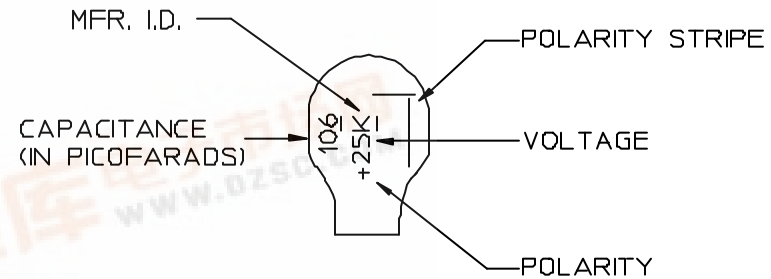

DRAWN BY GCK		DATE 5/19/99		<p>CAP., SOLID TANTALUM 10 µF, 20%, 25V</p>	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ARE FRACTIONS DECIMALS ANGLES +1/64 .XX- .01 +1° XXX-+ .005</small>					
THIRD ANGLE PROJECTION		SIZE B	FSCM NO. 87131	DWG NO. 20641	REV A
DD NOT SCALE DRAWING		SCALE NONE	SHEET 1 OF 1		

