CustomTestPlugs, Jacks, PostsConnectorsHardwareSpacers/CapabilitiesAccessoriesStandoffs

Hom

About Abbatron

Products

Locate Distributor or Representative

Contact Us

Request Information

Site Map

Inventory Search

Cross Reference


UPS Tracking

632 Arch Street, POB 726 Meadville, PA 16335 USA 814-724-6440 Contact Webmaster © May 6, 2005

Brass Round Standoffs

Standard Nickel Plating provides a hard, bright, non-oxidizing surface which will stand up to difficult ambient conditions.

- Alternative plating finishes available such as zinc, silver or gold.
- Other lengths, threads and diameter specs available by special order. Call your sales representative for more information

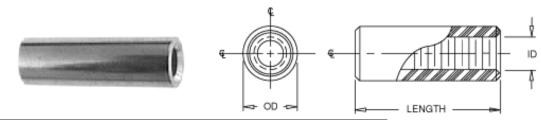

Long	,	O.D.		THREAD					
	Length		#2-56	#4-40	#6-32	#8-32	#10-32		
		3/16	9030	9045					
.125	1/8	1/4		8760	8761	8762			
.,20	120	5/16			9377A	9378A	9379A		
		3/8				7902	9380A		
	3/16	3/16	9031	9046					
.187		1/4		8763	8764	8765			
.101		5/16			9377B	9378B	9379B		
		3/8				7905	9380B		
	1/4	3/16	9032	9047					
.250		1/4		2370	2120	2125			
.230		5/16			9377C	9378C	9379C		
		3/8				7908	9380C		
	5/16	3/16	9033	9048					
.312		1/4		8766	8767	8768			
.512		5/16			9377D	9378D	9379D		
		3/8				7911	9380D		
	3/8	3/16	9034	9049					
.375		1/4		2371	2121	2126			
.575		5/16			9377E	9378E	9379E		
		3/8				7914	9380E		
	7/16	3/16	9035	9050					
.437		1/4		8769	8770	8771			
.437		5/16			9377F	9378F	9379F		
		3/8				7917	9380F		
	1/2	3/16	9036	9051					
.500		1/4		2372	2122	2127			
.500		5/16			9377G	9378G	9379G		
		3/8				7920	9380G		
.562	9/16	3/16	9037	9052					
.002		1/4		8772	8773	8774			
.625	5/8	3/16	9038	9053					
		1/4		8775	8776	8777			
.687	11/16	3/16	9039	9054	0770	0700			
	3/4	1/4	0040	8778	8779	8780			
.750		3/16 1/4	9040	9055	24.22	2420			
	13/16	3/16	9041	2373 9056	2123	2128			
.812		1/4	3041	8781	8782	8783			
	7/8	3/16	9042	9057	0/02	0703			
.875		1/4	3042	8784	8785	8786			

		1/4		2373	2123	2128	
.812	13/16	3/16	9041	9056			
		1/4		8781	8782	8783	
.875	7/8	3/16	9042	9057			
.013		1/4		8784	8785	8786	
.937	15/16	3/16	9043	9058			
		1/4		8787	8788	8789	
1.000	1	3/16	9044	9059			
		1/4		2374	2124	2129	
1.125	1-1/8			8760R	8761R	8762R	
1.250	1-1/4			8760S	8761S	8762S	
1.375	1-3/8			8760T	8761T	8762T	
1.500	1-1/2	1/4		8760U	8761U	8762U	
1.625	1-5/8	174		8760V	8761V	8762V.	
1.750	1-3/4			8760W	8761W	8762VV	
1.875	1-7/8			8760X	8761X	8762X	
2.000	2			8760Y	8761Y	8762Y	

Maximum Thread Depth in Inches							
Thread Size	2 - 56	4 - 40	6 - 32	8 - 32	10 - 32		
Thread Length	5/8	1	1	1	1		
Tapped Thru	3/0	l	ı	l			
Thread Length	1/4	3/8	3/8	3/8	3/8		
Tap each end	1/4	J/0	3/0	3/0	J/0		

 $\underline{home} \mid \underline{about \ abbatron} \mid \underline{products} \mid \underline{locate \ distributor \ or \ representative} \mid \underline{contact \ us} \mid \underline{request \ information} \mid \underline{site \ map}$