

NEC

NPN SILICON HIGH FREQUENCY TRANSISTOR

UPA829TF

FEATURES

- **SMALL PACKAGE OUTLINE:**
SOT-363 package measures just 2.0 mm x 1.25 mm
- **LOW HEIGHT PROFILE:**
Just 0.60 mm high
- **HIGH COLLECTOR CURRENT:**
Ic MAX = 100 mA

DESCRIPTION

The UPA829TF contains two NE688 NPN high frequency silicon bipolar chips. NEC's new low profile TF package is ideal for all portable wireless applications where reducing component height is a prime consideration. Each transistor chip is independently mounted and easily configured for oscillator/buffer amplifier and other applications.

ABSOLUTE MAXIMUM RATINGS¹ (TA = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
V _{CB0}	Collector to Base Voltage	V	9
V _{CEO}	Collector to Emitter Voltage	V	6
V _{EB0}	Emitter to Base Voltage	V	2
I _c	Collector Current	mA	100
P _T	Total Power Dissipation		
	1 Die	mW	110
	2 Die	mW	200
T _J	Junction Temperature	°C	150
T _{STG}	Storage Temperature	°C	-65 to +150

Note: 1. Operation in excess of any one of these parameters may result in permanent damage.



ELECTRICAL CHARACTERISTICS (TA = 25°C)

PART NUMBER PACKAGE OUTLINE			UPA829TF TS06		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN	TYP	MAX
I _{CB0}	Collector Cutoff Current at V _{CB} = 5V, I _E = 0	μA			0.1
I _{EB0}	Emitter Cutoff Current at V _{EB} = 1V, I _C = 0	μA			0.1
h _{FE}	Forward Current Gain ¹ at V _{CE} = 1V, I _C = 3mA		80	110	160
f _T	Gain Bandwidth at V _{CE} = 3V, I _C = 20mA, f = 2GHz	GHz		9.0	
C _{re}	Feedback Capacitance ² at V _{CB} = 1V, I _E = 0, f = 1MHz	pF		0.75	0.85
S _{21E} ²	Insertion Power Gain at V _{CE} = 3V, I _C = 20mA, f = 2GHz	dB		6.5	
NF	Noise Figure at V _{CE} = 3V, I _C = 7mA, f = 2GHz	dB		1.5	
h _{FE1} /h _{FE2}	h _{FE} Ratio: h _{FE1} = Smaller Value of Q ₁ , or Q ₂ h _{FE2} = Larger Value of Q ₁ or Q ₂		0.85		

- Notes: 1. Pulsed measurement, pulse width ≤ 350 μs, duty cycle ≤ 2 %.
2. The emitter terminal should be connected to the ground terminal of the 3 terminal capacitance bridge.
For Tape and Reel version use part number UPA829TF-T1, 3K per reel.

OUTLINE DIMENSIONS (Units in mm)

PACKAGE OUTLINE TS06

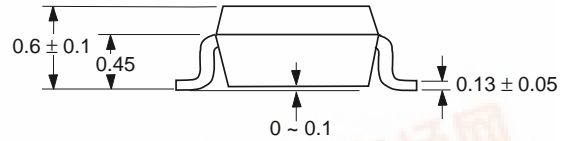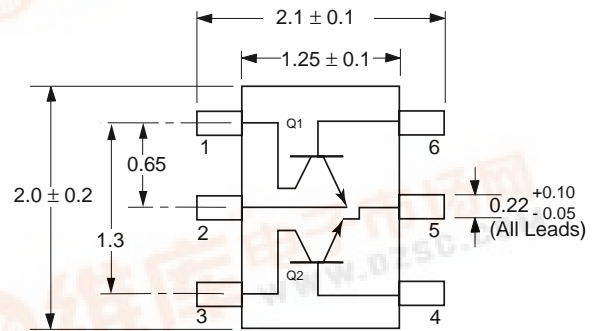

PIN CONNECTIONS

1. Collector (Q1)
2. Emitter (Q1)
3. Collector (Q2)
4. Base (Q2)
5. Emitter (Q2)
6. Base (Q1)

Note: Pin 1 is the lower left most pin as the package lettering is oriented and read left to right.



California Eastern Laboratories

EXCLUSIVE NORTH AMERICAN AGENT FOR NEC RF, MICROWAVE & OPTOELECTRONIC SEMICONDUCTORS

CEL CALIFORNIA EASTERN LABORATORIES • Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • Telex 34-6393 • FAX (408) 988-0279
24-Hour Fax-On-Demand: 800-390-3232 (U.S. and Canada only) • Internet: http://WWW.CEL.COM

DATA SUBJECT TO CHANGE WITHOUT NOTICE

2/00