

IGBT MODULE (N series)


■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Improved FWD Characteristic
- Minimized Internal Stray Inductance
- Overcurrent Limiting Function (4-5 Times Rated Current)

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

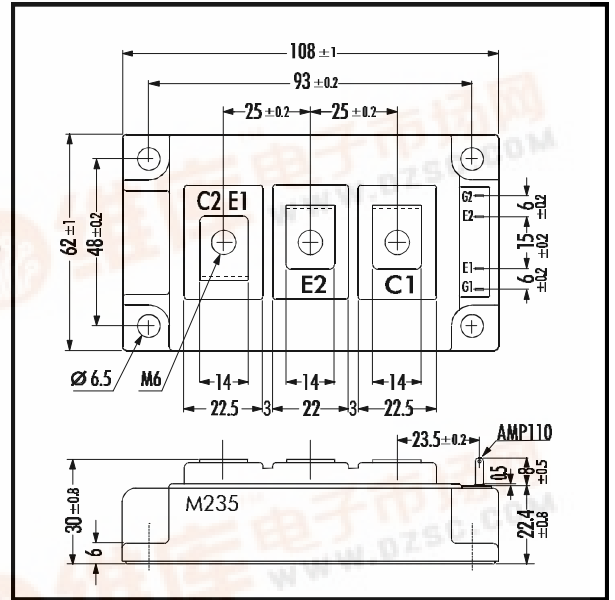

■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)


| Items | Symbols | Ratings | Units |
|---------------------------|------------------|-----------------------|-------|
| Collector-Emitter Voltage | V _{CES} | 1200 | V |
| Gate -Emitter Voltage | V _{GES} | ± 20 | V |
| Collector Current | Continuous | I _C | 150 |
| | 1ms | I _{C PULSE} | 300 |
| | Continuous | -I _C | 150 |
| | 1ms | -I _{C PULSE} | 300 |
| Max. Power Dissipation | P _C | 1100 | W |
| Operating Temperature | T _j | +150 | °C |
| Storage Temperature | T _{stg} | -40 ~ +125 | °C |
| Isolation Voltage | A.C. 1min. | V _{is} | 2500 |
| Screw Torque | Mounting *1 | 3.5 | Nm |
| | Terminals *1 | 3.5 | |

Note: *1:Recommendable Value; 2.5 ~ 3.5 Nm (M5)

• Electrical Characteristics (at T_F=25°C)

| Items | Symbols | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------------------------|----------------------|--|------|-------|------|-------|
| Zero Gate Voltage Collector Current | I _{CES} | V _{GE} =0V V _{CE} =1200V | | | 2.0 | mA |
| Gate-Emitter Leakage Current | I _{GES} | V _{CE} =0V V _{GE} =± 20V | | | 30 | µA |
| Gate-Emitter Threshold Voltage | V _{GE(th)} | V _{GE} =20V I _C =150mA | 4.5 | | 7.5 | V |
| Collector-Emitter Saturation Voltage | V _{CE(sat)} | V _{GE} =15V I _C =150A | | | 3.3 | V |
| Input capacitance | C _{ies} | V _{GE} =0V | | 24000 | | pF |
| Output capacitance | C _{oes} | V _{CE} =10V | | 8700 | | |
| Reverse Transfer capacitance | C _{res} | f=1MHz | | 7740 | | |
| Turn-on Time | t _{ON} | V _{CC} =600V | | 0.65 | 1.2 | µs |
| | t _r | I _C =150A | | 0.25 | 0.6 | |
| | t _{OFF} | V _{GE} =± 15V | | 0.85 | 1.5 | |
| Turn-off Time | t _f | R _G =5.6Ω | | 0.35 | 0.5 | µs |
| | V _F | I _F =150A V _{GE} =0V | | | 3.0 | |
| Reverse Recovery Time | t _{rr} | I _F =150A | | | 350 | ns |

■ Equivalent Circuit

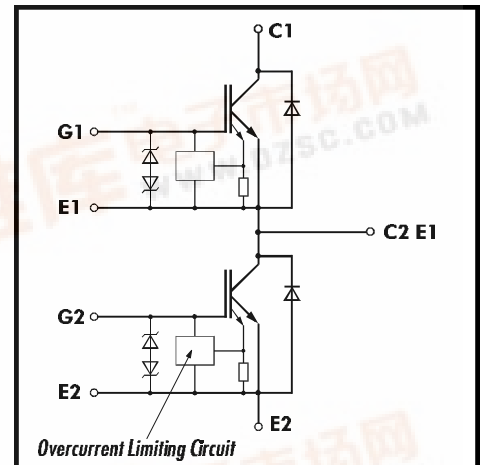


• Thermal Characteristics


| Items | Symbols | Test Conditions | Min. | Typ. | Max. | Units |
|--------------------|----------------------|-----------------------|------|-------|------|-------|
| Thermal Resistance | R _{th(f-c)} | IGBT | | | 0.11 | °C/W |
| | R _{th(f-e)} | Diode | | | 0.18 | |
| | R _{th(c-f)} | With Thermal Compound | | 0.025 | | |




Collector current vs. Collector-Emitter voltage
T_j=25°C

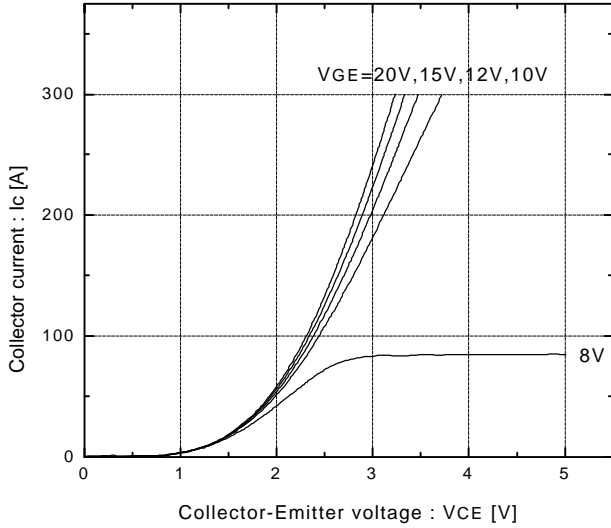


Collector current vs. Collector-Emitter voltage
T_j=125°C

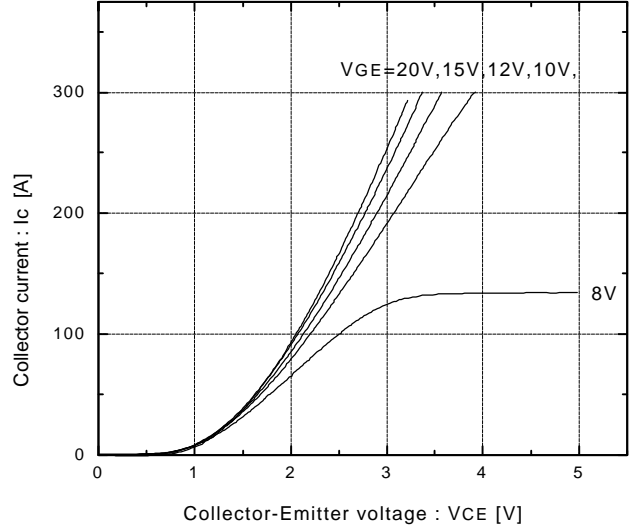


Collector-Emitter vs. Gate-Emmitter voltage
T_j=25°C

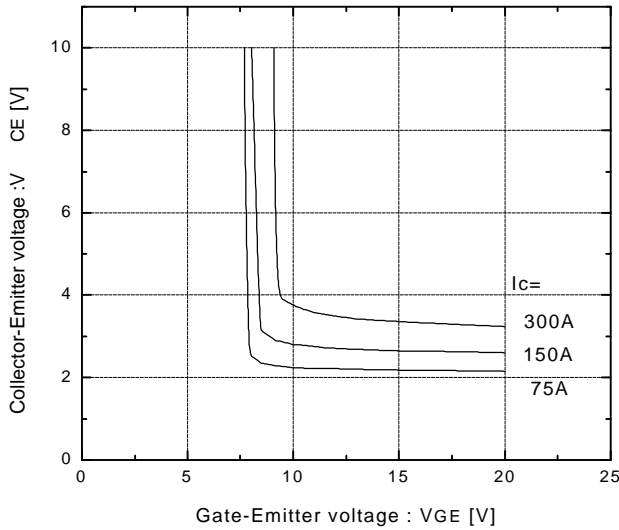


Collector-Emitter vs. Gate-Emmitter voltage
T_j=125°C

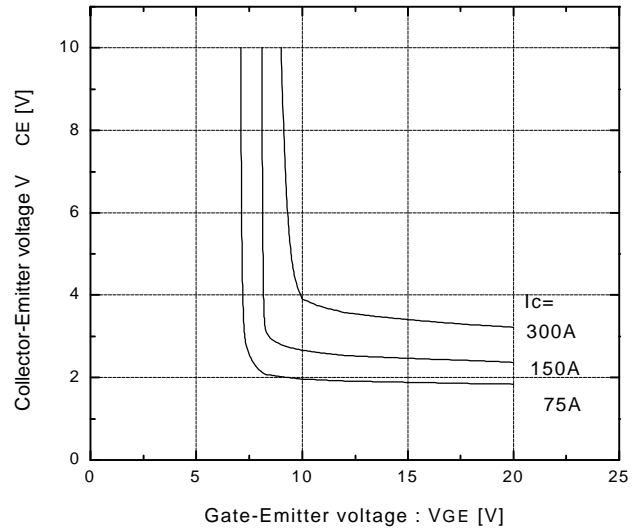

Switching time vs. Collector current
V_{cc}=600V, R_G=5.6Ω, V_{GE}=±15V, T_j=25°C

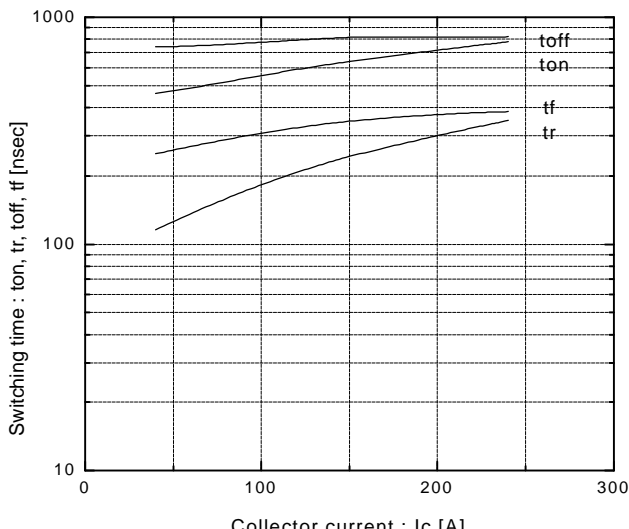


Switching time vs. Collector current
V_{cc}=600V, R_G=5.6Ω, V_{GE}=±15V, T_j=125°C

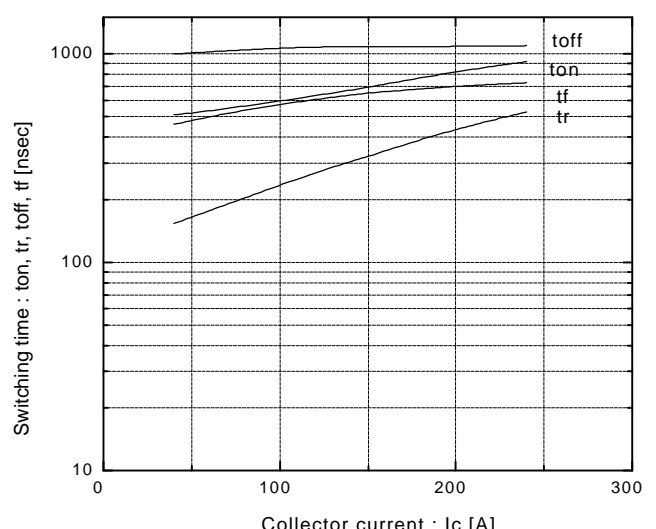


Switching time vs. R_G

$V_{CC}=600V, I_C=150A, V_{GE}=\pm 15V, T_J=25^\circ C$

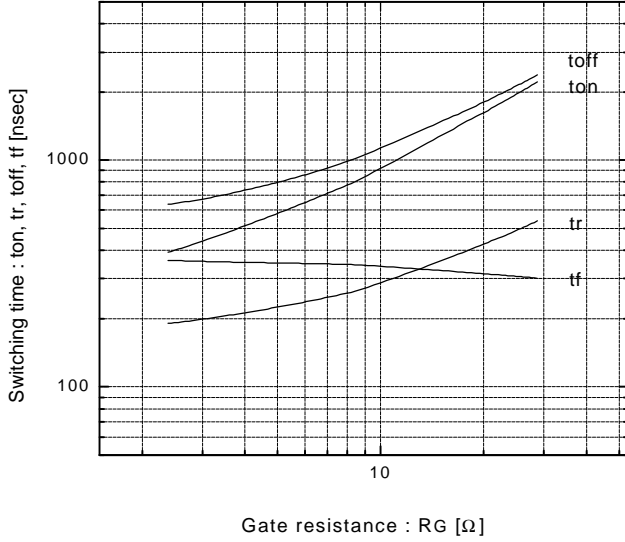


Dynamic input characteristics

$T_J=25^\circ C$

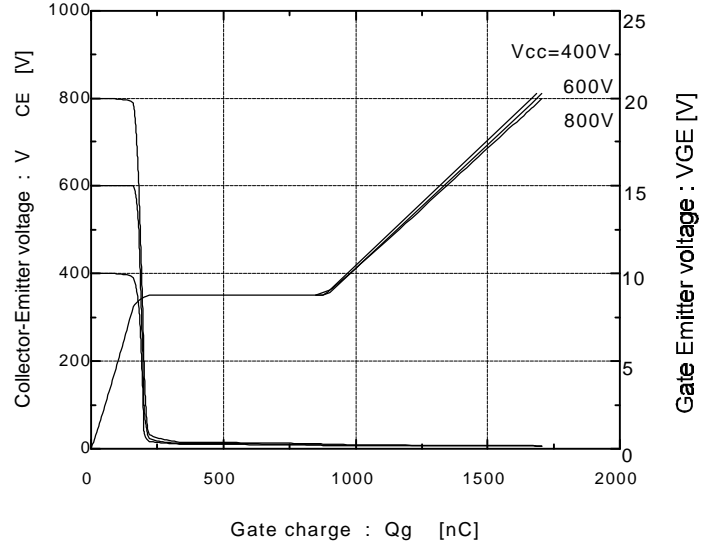


Forward current vs. Forward voltage

$V_{GE}=0V$

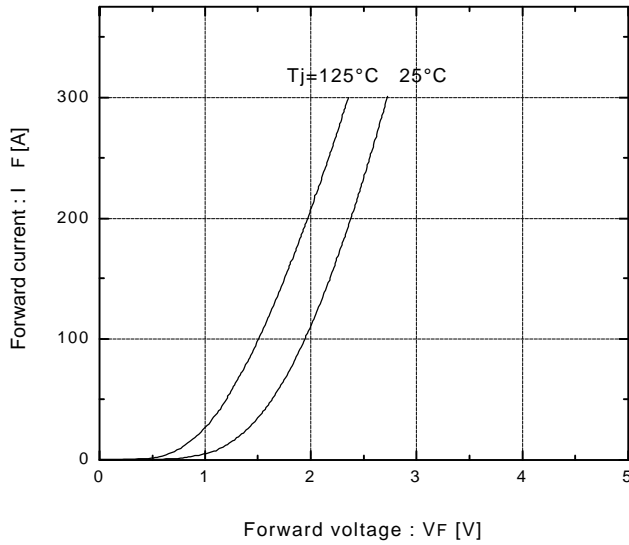


Reverse recovery characteristics


t_{rr}, I_{rr} vs. I_F

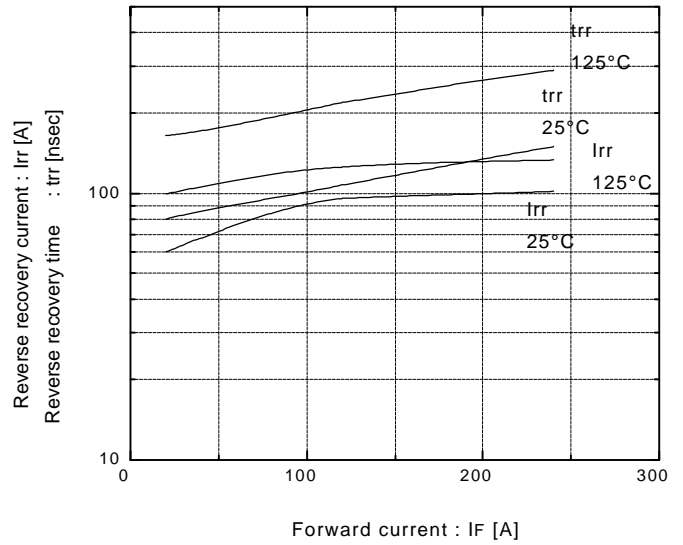


Transient thermal resistance

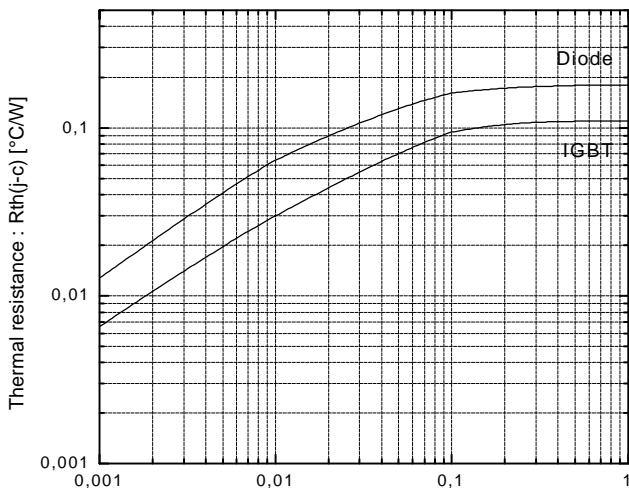


Reversed biased safe operating area
 $+V_{GE}=15V, -V_{GE}\leq 15V, T_J\leq 125^\circ C, R_G\geq 5.6\Omega$

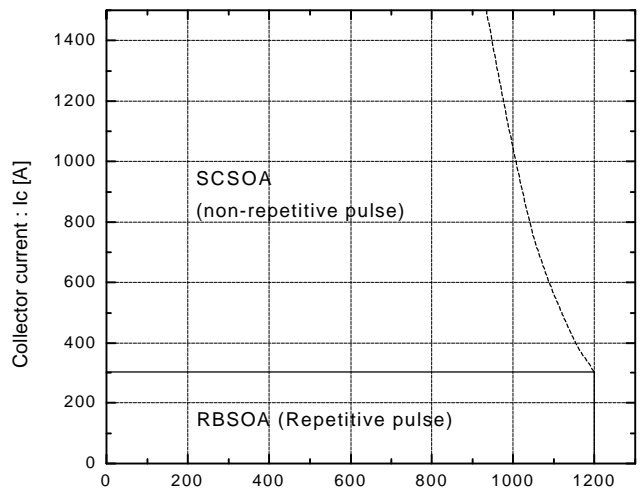

Switching loss vs. Collector current
Vcc=600V, RG=5.6Ω, VGE=±15V

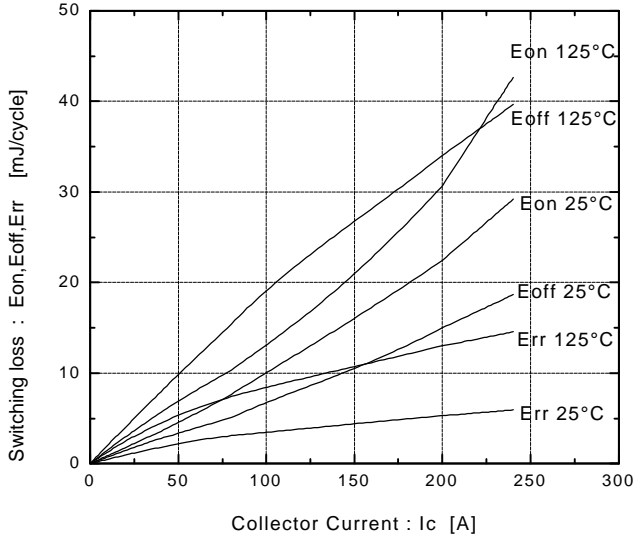

Capacitance vs. Collector-Emitter voltage
Tj=25°C

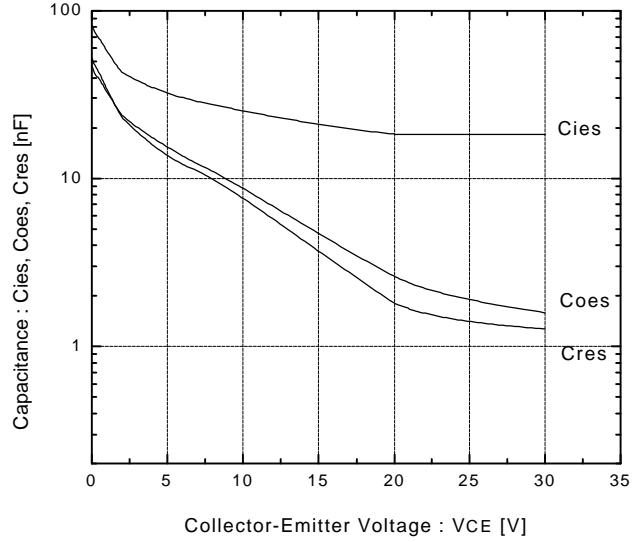

Fuji Electric GmbH

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

Fuji Electric (UK) Ltd.

Commonwealth House
2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60