

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07285 07-33-21

SILICON PNP TRIPLE DIFFUSED TYPE

2SA1263


POWER AMPLIFIER APPLICATIONS.

FEATURES:

- Complementary to 2SC3180
- Recommend for 40W High Fidelity Audio Frequency Amplifier Output Stage.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V _{CB0}	-80	V
Collector-Emitter Voltage	V _{CEO}	-80	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current	I _C	-6	A
Base Current	I _B	-0.6	A
Collector Power Dissipation (T _c =25°C)	P _C	60	W
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ 150	°C

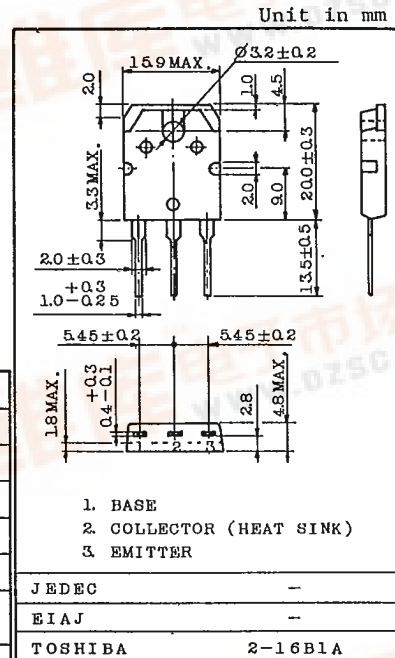

Weight : 4.6g

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I _{CB0}	V _{CB} =80V, I _E =0	-	-	-5.0	μA
Emitter Cut-off Current	I _{EBO}	V _{EB} =-5V, I _C =0	-	-	-5.0	μA
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =-50mA, I _B =0	-80	-	-	V
DC Current Gain	h _{FE} (1) (Note)	V _{CE} =-5V, I _C =-1A	55	-	160	-
	h _{FE} (2)	V _{CE} =-5V, I _C =-3A	35	80	-	-
Collector-Emitter Saturation Voltage	V _{CE(sat)}	I _C =-5A, I _B =-0.5A	-	-1.0	-2.0	V
Base-Emitter Voltage	V _{BE}	V _{CE} =-5V, I _C =-3A	-	-0.95	-1.5	V
Transition Frequency	f _T	V _{CE} =-5V, I _C =-1A	-	30	-	MHz
Collector Output Capacitance	C _{ob}	V _{CB} =-10V, I _E =0, f=1MHz	-	290	-	pF

Note : h_{FE}(1) Classification R : 55~110 . O : 80~160

TOSHIBA CORPORATION

2SA1263

