

<b>SANYO</b>	No.3217	<b>2SA1331/2SC3361</b>
	PNP/NPN Epitaxial Planar Silicon Transistors High-Speed Switching Applications	

**Features**

- Fast switching speed
- High breakdown voltage
- Small-sized package permitting the 2SA1331/2SC3361-applied sets to be made small and slim

( ) : 2SA1331

**Absolute Maximum Ratings at Ta = 25°C**

			unit
Collector to Base Voltage	V <sub>CB0</sub>	(-)60	V
Collector to Emitter Voltage	V <sub>CEO</sub>	(-)50	V
Emitter to Base Voltage	V <sub>EBO</sub>	(-)5	V
Collector Current	I <sub>C</sub>	(-)150	mA
Collector Current(Pulse)	I <sub>CP</sub>	(-)400	mA
Base Current	I <sub>B</sub>	(-)40	mA
Collector Dissipation	P <sub>C</sub>	150	mW
Junction Temperature	T <sub>j</sub>	125	°C
Storage Temperature	T <sub>stg</sub>	-55 to +125	°C

**Electrical Characteristics at Ta = 25°C**

			min	typ	max	unit
Collector Cutoff Current	I <sub>CBO</sub>	V <sub>CB</sub> = (-)40V, I <sub>E</sub> = 0			(-)0.1	μA
Emitter Cutoff Current	I <sub>EBO</sub>	V <sub>EB</sub> = (-)4V, I <sub>C</sub> = 0			(-)0.1	μA
DC Current Gain	h <sub>FE</sub>	V <sub>CE</sub> = (-)6V, I <sub>C</sub> = (-)1mA	90*		400*	
Gain-Bandwidth Product	f <sub>T</sub>	V <sub>CE</sub> = (-)6V, I <sub>C</sub> = (-)1mA		100		MHz
Output Capacitance	C <sub>ob</sub>	V <sub>CB</sub> = (-)6V, f = 1MHz		(3.5)2.7		pF
C-E Saturation Voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = (-)10mA, I <sub>B</sub> = (-)1mA		(-)0.1	(-)0.4	V
B-E Saturation Voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = (-)10mA, I <sub>B</sub> = (-)1mA		(-)0.75	(-)1.1	V
C-B Breakdown Voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = (-)10μA, I <sub>E</sub> = 0	(-)60			V
C-E Breakdown Voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = (-)1mA, R <sub>BE</sub> = ∞	(-)50			V
E-B Breakdown Voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = (-)10μA, I <sub>C</sub> = 0	(-)5			V
Delay Time	t <sub>d</sub>	See specified Test Circuit.		40		ns
Rise Time	t <sub>r</sub>	∞		(120)80		ns
Storage Time	t <sub>stg</sub>	∞		(190)230		ns
Fall Time	t <sub>f</sub>	∞		(200)160		ns

\* : The 2SA1331/2SC3361 are classified by 1mA h<sub>FE</sub> as follows :


90	4	180	135	5	270	200	6	400
----	---	-----	-----	---	-----	-----	---	-----

Marking 2SA1331 : O

2SC3361 : S


h<sub>FE</sub> rank : 4,5,6

**Switching Time Test Circuit**








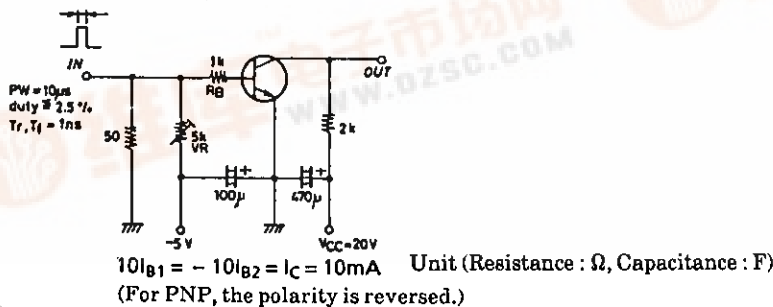


**Package Dimensions 2018A**








(unit : mm)

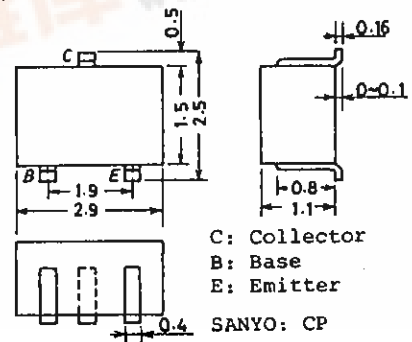

2SA1331/2SC3361

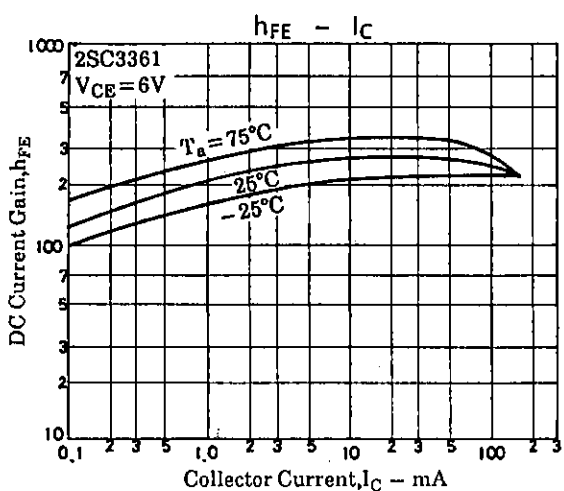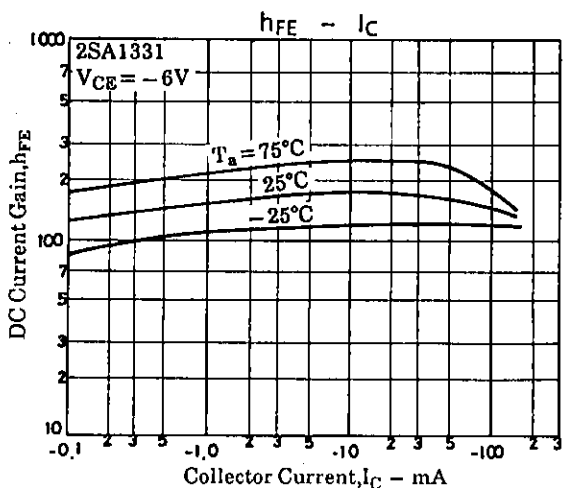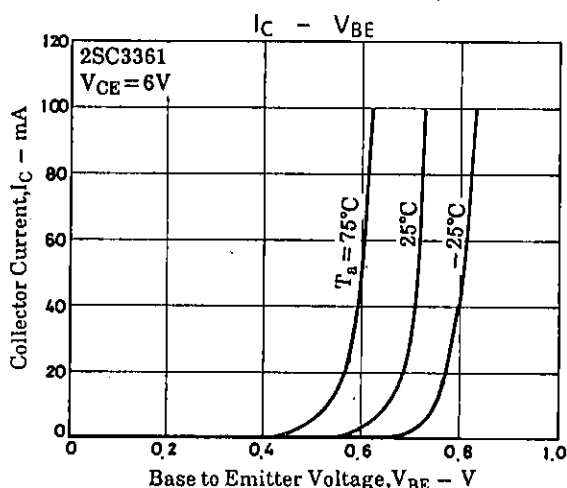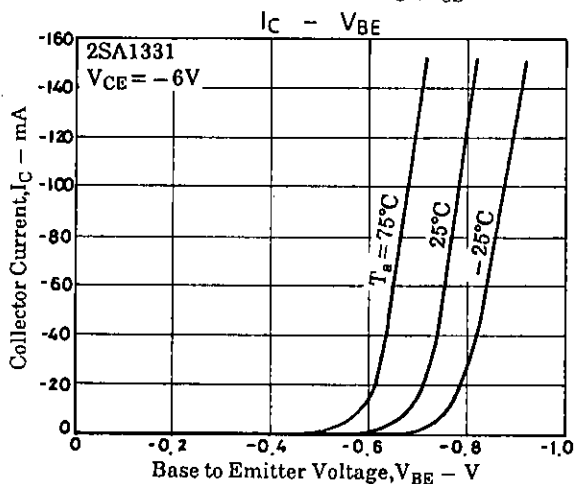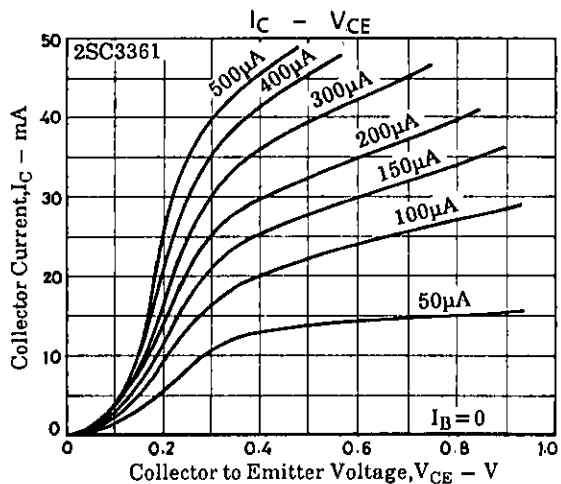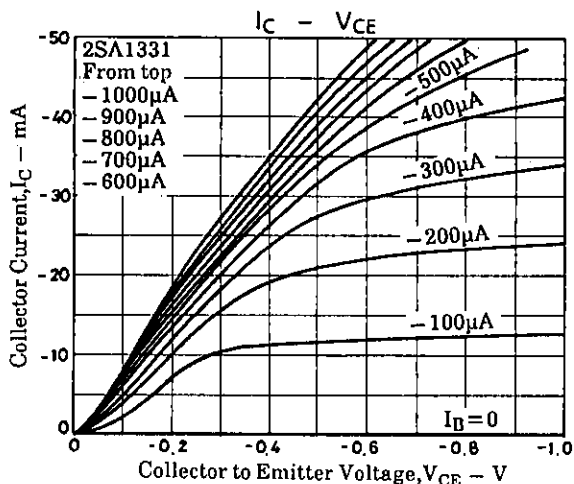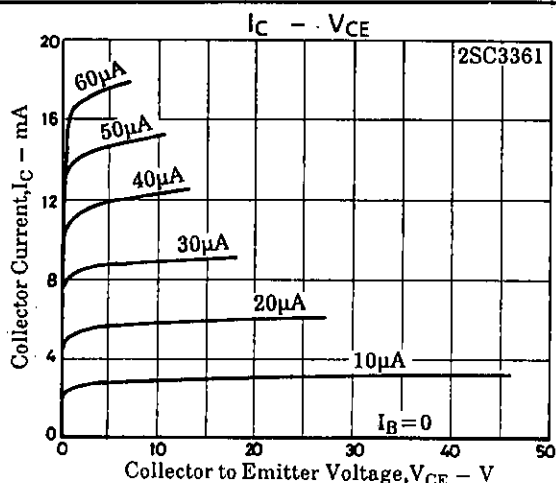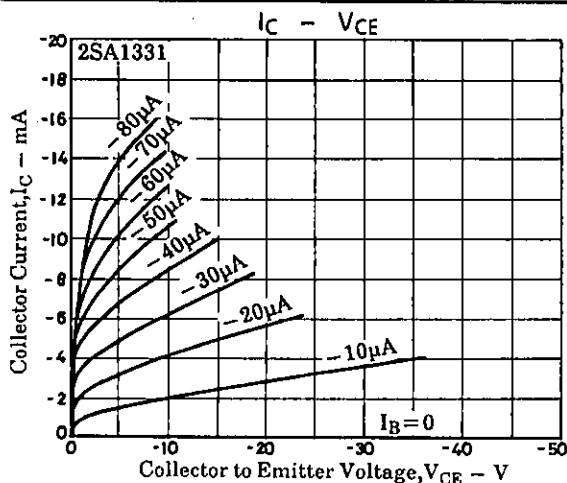

2SA1331/2SC3361

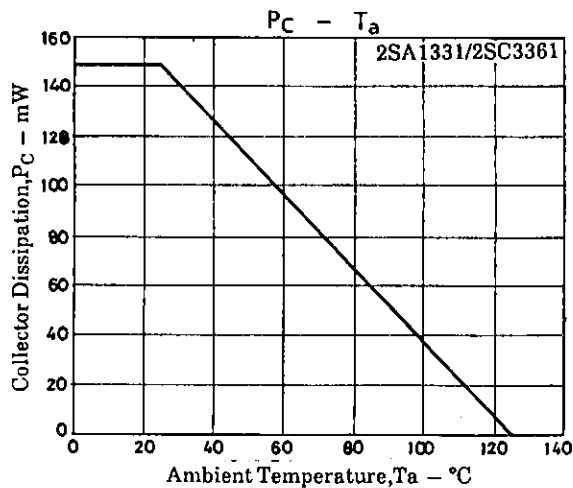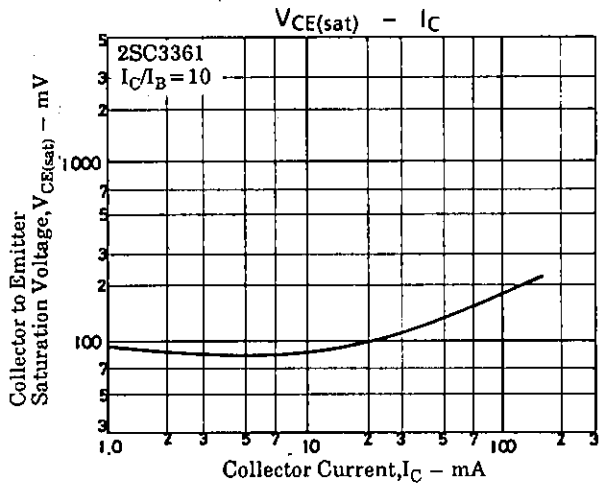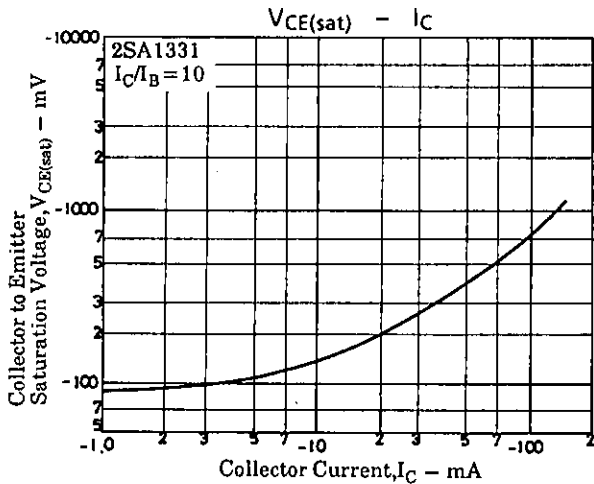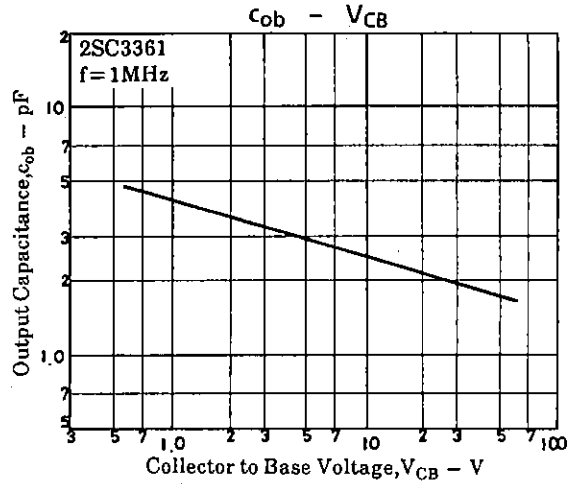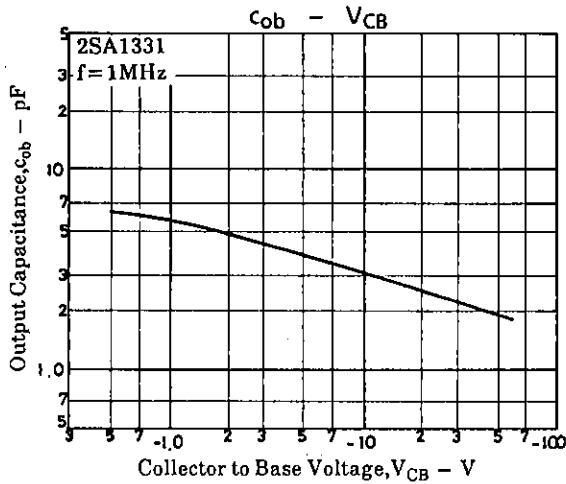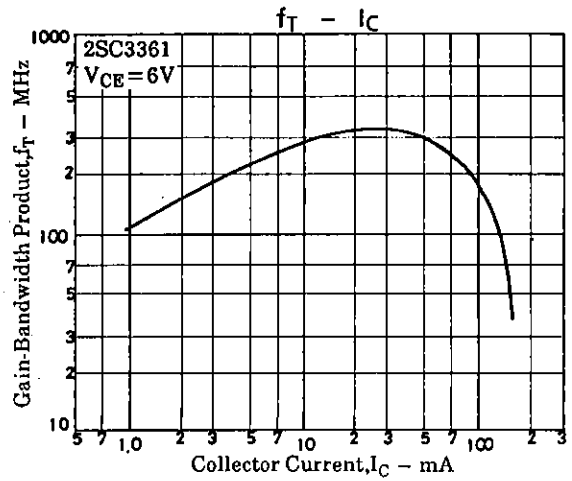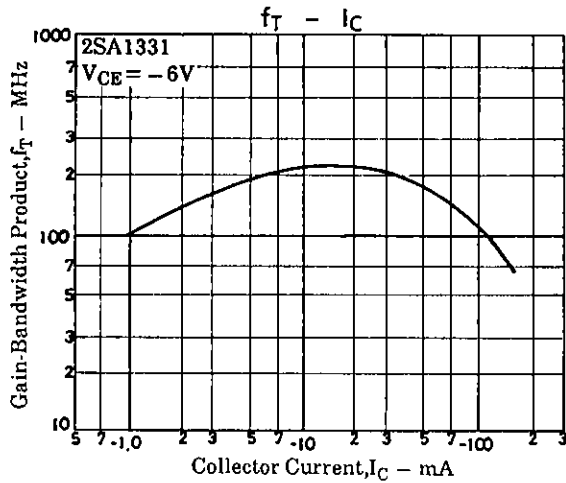

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.