

Transistor

Panasonic

2SB792, 2SB792A

Silicon PNP epitaxial planer type

For high breakdown voltage low-noise amplification
Complementary to 2SD814

Features

- High collector to emitter voltage V_{CEO} .
- Low noise voltage NV.
- Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing.

Absolute Maximum Ratings ($T_a=25^{\circ}\text{C}$)


Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	-150	V
2SB792A		-185	
Collector to emitter voltage	V_{CEO}	-150	V
2SB792A		-185	
Emitter to base voltage	V_{EBO}	-5	V
Peak collector current	I_{CP}	-100	mA
Collector current	I_C	-50	mA
Collector power dissipation	P_C	200	mW
Junction temperature	T_j	150	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55 ~ +150	$^{\circ}\text{C}$

Electrical Characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	$V_{CB} = -100\text{V}, I_E = 0$			-1	μA
Collector to emitter voltage	2SB792	$I_C = -100\mu\text{A}, I_B = 0$	-150			V
	2SB792A		-185			
Emitter to base voltage	V_{EBO}	$I_E = -10\mu\text{A}, I_C = 0$	-5			V
Forward current transfer ratio	2SB792	$V_{CE} = -5\text{V}, I_C = -10\text{mA}$	130		450	
	2SB792A		130		330	
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -30\mu\text{A}, I_B = -3\text{mA}$			-1	V
Transition frequency	f_T	$V_{CB} = -10\text{V}, I_E = 10\text{mA}, f = 200\text{MHz}$		200		MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$		4		pF
Noise voltage	NV	$V_{CE} = -10\text{V}, I_C = -1\text{mA}, G_V = 80\text{dB}, R_g = 100\text{k}\Omega, \text{Function} = \text{FLAT}$		150		mV







* h_{FE} Rank classification

Rank	R	S	T
h_{FE}	130 ~ 220	185 ~ 330	260 ~ 450
Marking	2SB792	IR	IS
Symbol	2SB792A	2FR	2FS

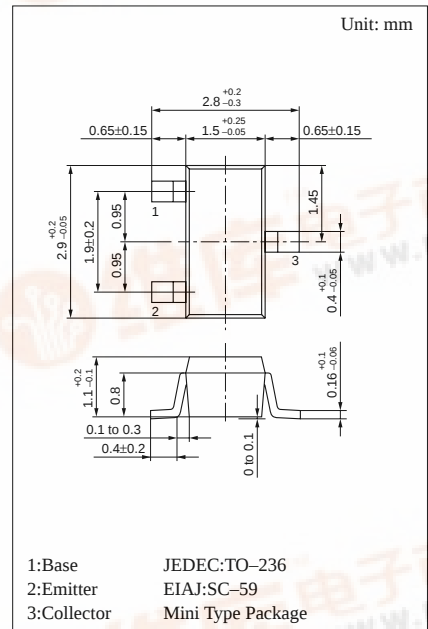

Marking symbol : I(2SB792)
2F(2SB792A)

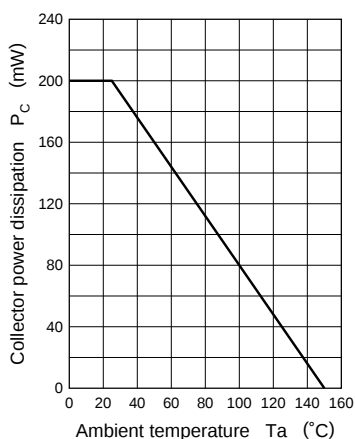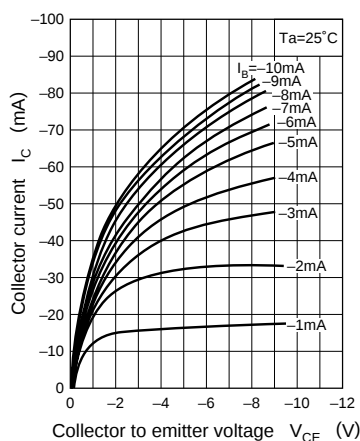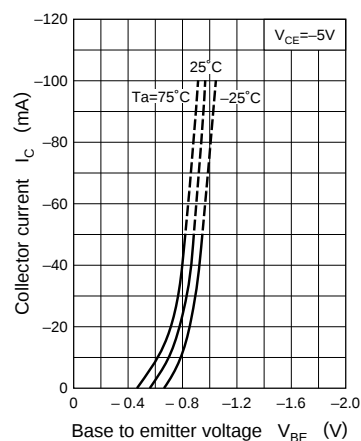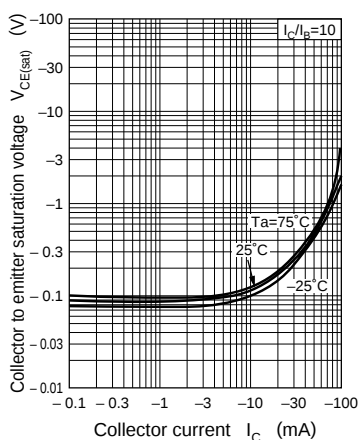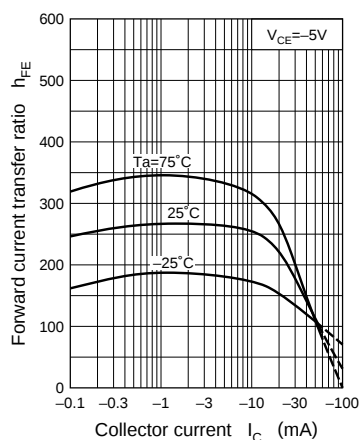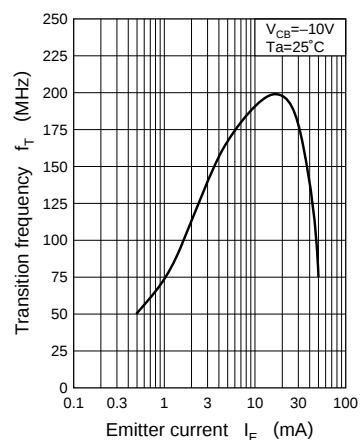

$P_C - T_a$  $I_C - V_{CE}$  $I_C - V_{BE}$  $V_{CE(sat)} - I_C$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$ 