




2SB1033 PNP EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

- Complement to 2SD1437

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	-80	V
Collector-Emitter Voltage	V _{CE0}	-60	V
Emitter-Base voltage	V _{EB0}	-5	V
Collector Current (DC)	I _C	-3	A
Collector Dissipation (T _c =25°C)	P _c	40	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-50~150	°C

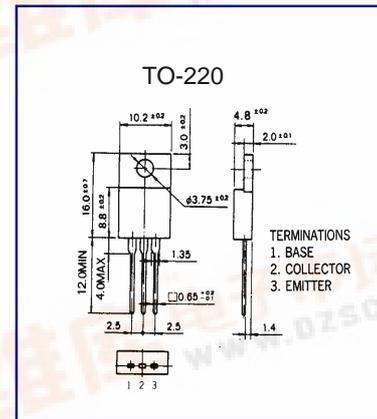

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I _{CB0}	V _{CB} =-30V, I _E =0			100	μA
Emitter Cutoff Current	I _{EB0}	V _{EB} =-5V, I _C =0			100	μA
DC Current Gain	h _{FE1}	V _{CE} =-5V, I _C =-1A		120		
Collector- Emitter Saturation Voltage	V _{CE(sat)}	I _C =-2A, I _B =-0.2A			1.0	V
Current Gain Bandwidth Product	f _T	V _{CE} =-2V, I _C =-0.5A		8		MHz

