




2SC1061 NPN EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

- Complement to 2SA671

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V _{CB0}	50	V
Collector-Emitter Voltage	V _{CE0}	50	V
Emitter-Base voltage	V _{EB0}	7	V
Collector Current (DC)	I _C	3	A
Collector Dissipation (T _c =25°C)	P _c	25	W
Junction Temperature	T _j	150	°C
Storage Temperature	T _{stg}	-50~150	°C

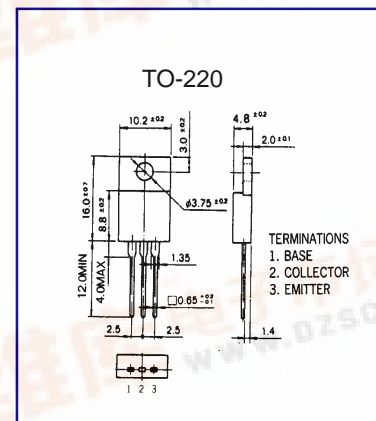

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I _{CB0}	V _{CB} = 50V, I _E =0			100	μA
Emitter Cutoff Current	I _{EB0}	V _{EB} = 7V, I _C =0			100	μA
DC Current Gain	h _{FE1}	V _{CE} = 4V, I _C =1A	35		200	
Collector- Emitter Saturation Voltage	V _{CE(sat)}	I _C =3A, I _B =0.3A			1.0	V
Current Gain Bandwidth Product	f _T	V _{CE} = 5V, I _C =0.5A		8		MHz

