

SANYO	No.462E	2SC2078
	NPN Epitaxial Planar Silicon Transistor	
27MHz RF Power Amp Applications		

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Value	Unit
Collector-to-Base Voltage	V _{CBO}	80	V
Collector-to-Emitter Voltage	V _{CER}	75	V
Emitter-to-Base Voltage	V _{EBO}	5	V
Collector Current	I _C	3	A
Collector Current (Pulse)	I _{CP}	5	A
Collector Dissipation	P _C	1.2	W
Junction Temperature	T _j	10	W
Storage Temperature	T _{stg}	-55 to +150	°C

T_c=50°C


Electrical Characteristics Characteristics at Ta=25°C

Parameter	Symbol	Test Conditions	min	typ	max	unit
Collector Cutoff Current	I _{CBO}	V _{CB} =40V, I _E =0			10	μA
Emitter Cutoff Current	I _{EBO}	V _{EB} =4V, I _C =0			10	μA
DC Current Gain	h _{FE}	V _{CE} =5V, I _C =0.5A	25*		200*	
Gain Bandwidth Product	f _T	V _{CE} =10V, I _C =0.1A	100	150		MHz
Output Capacitance	C _{ob}	V _{CB} =10V, f=1MHz		45	60	pF
C-E Saturation Voltage	V _{CE(sat)}	I _C =1A, I _B =0.1A	0.15	0.6		V
B-E Saturation Voltage	V _{BE(sat)}	I _C =1A, I _B =0.1A	0.9	1.2		V
C-B Saturation Voltage	V _{(BR)CBO}	I _C =100μA, I _B =0	80			V
C-E Saturation Voltage	V _{(BR)CER}	I _C =1mA, R _{BE} =150Ω	75			V
E-B Saturation Voltage	V _{(BR)EBO}	I _E =100μA, I _C =0	5			V
[At specified test circuit]						
Output Power	P _o	V _{CC} =12V, f=27MHz, P _i =0.2W	4.0			W
Power Efficiency	η		60			%

* The 2SC2078 is classified by 0.5A h_{FE} as follows:


25	B	50	40	C	80	60	D	120	100	E	200
----	---	----	----	---	----	----	---	-----	-----	---	-----

Package Dimensions 2010B
(unit:mm)

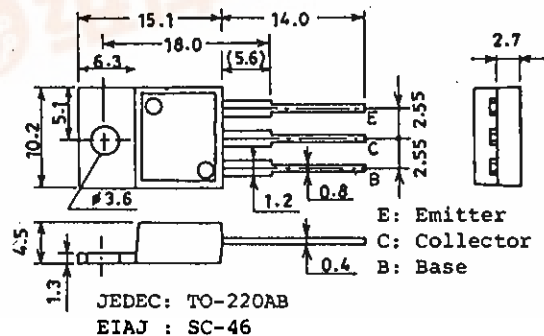







2SC2078





2SC2078 27MHz Output Power Test Circuit

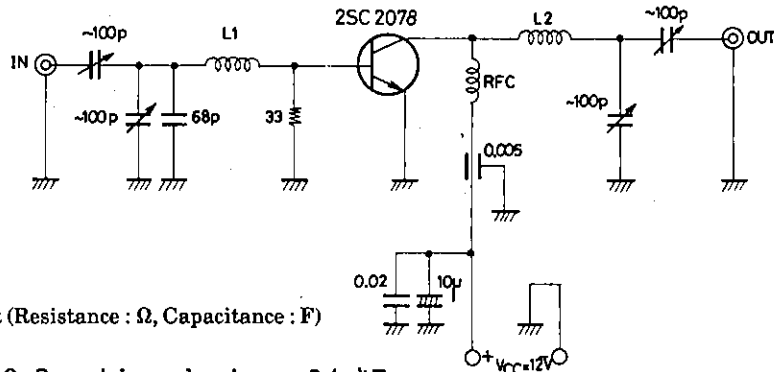

Unit (Resistance : Ω, Capacitance : F)

Coil data L1: 0.3mm tinned wire, 9ϕ 4T
 L2: 0.6mm tinned wire, 9ϕ 4T
 RFC 2.2uH

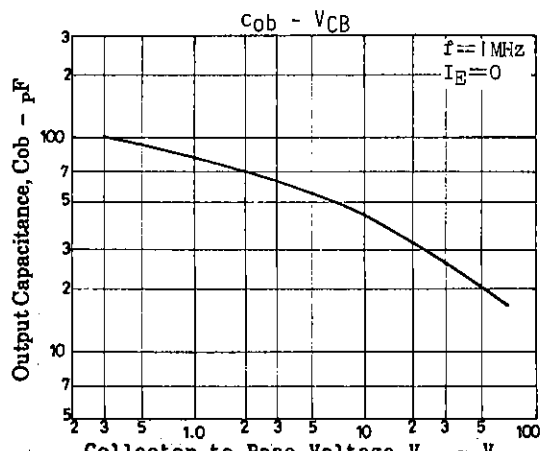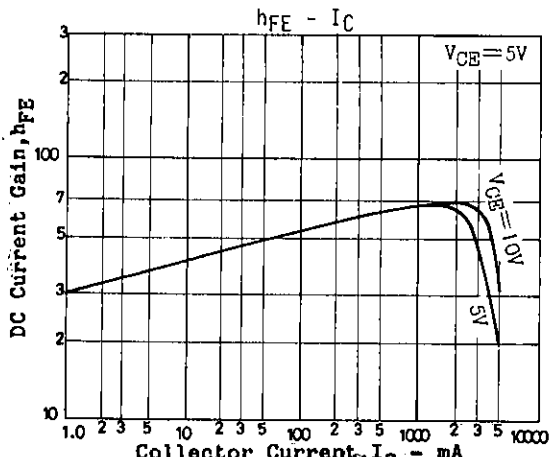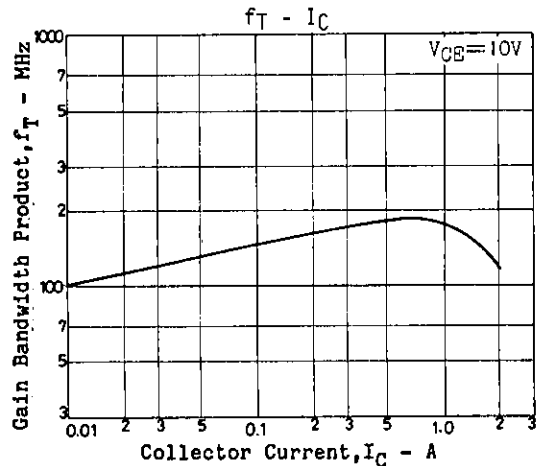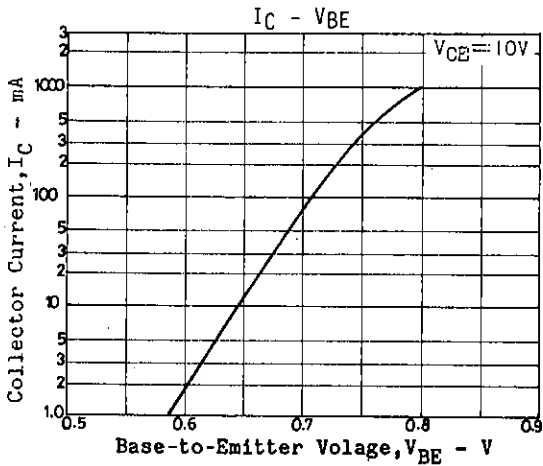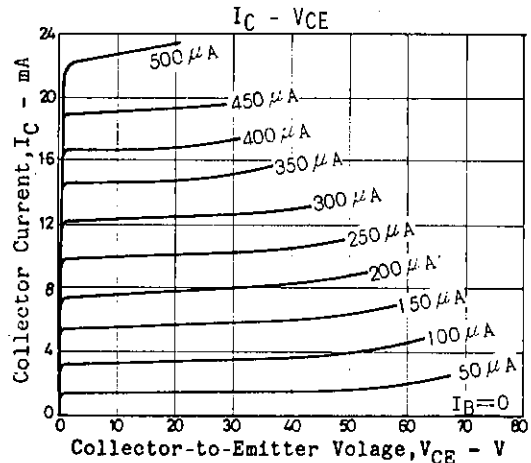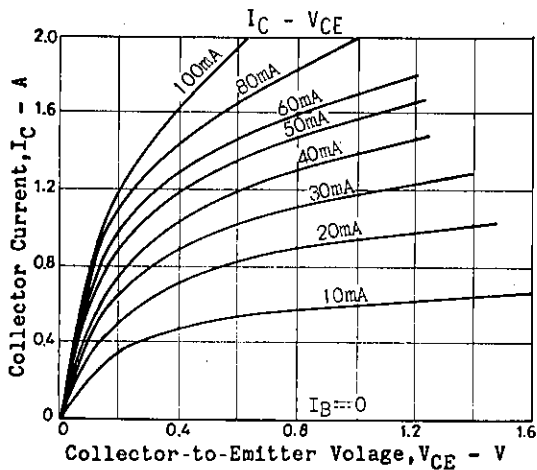

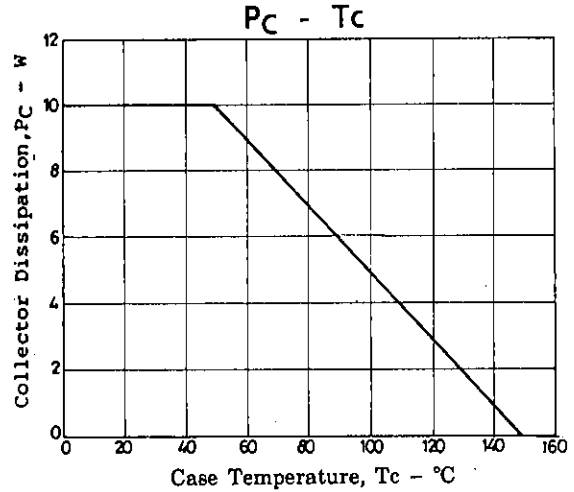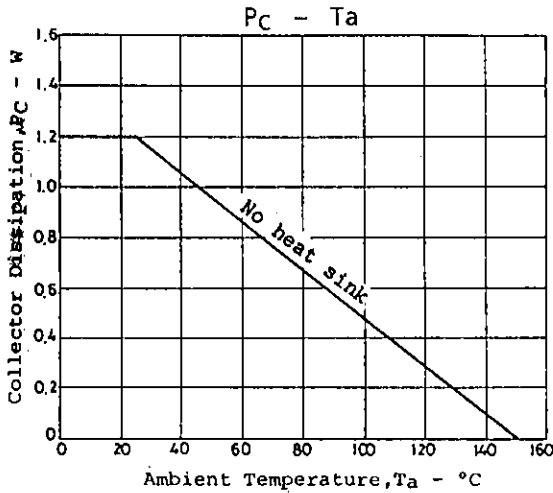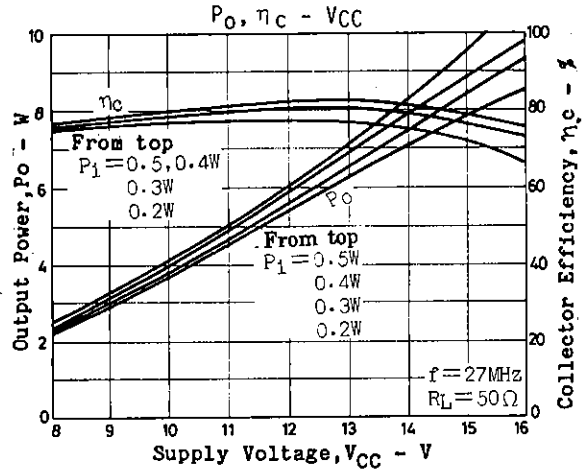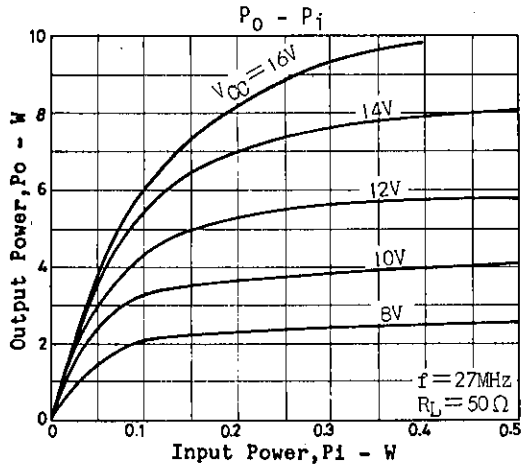

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.