



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

## Features

- High Surge Capacity
- Low Power Loss, High Efficiency
- High Current Capability, Low  $V_F$
- Metal of silicon Rectifier, majority Carrier Conduction
- Guard Ring For Transient Protection
- Plastic Package Has UL Flammability Classification 94V-0

## Maximum Ratings

- Operating Temperature:  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$
- Storage Temperature:  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$


MCC Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR3020W	20V	14V	20V
MBR3030W	30V	21V	30V
MBR3035W	35V	24.5V	35V
MBR3040W	40V	28V	40V
MBR3045W	45V	31.5V	45V
MBR3060W	60V	42V	60V
MBR3080W	80V	56V	80V
MBR30100W	100V	70V	100V

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	30.0A	$T_C=105^{\circ}\text{C}$
Peak Forward Surge Current	$I_{FSM}$	200A	8.3ms half sine
Maximum Instantaneous Forward Voltage MBR3020W-3045W MBR3060W MBR3080W-30100W	$V_F$	.63V .75V .84V	$I_{FM}=30.0A$ $T_A=25^{\circ}\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	1.0mA	$T_C=25^{\circ}\text{C}$
Typical Junction Capacitance	$C_j$	500pF	Measured at 1.0MHz, $V_R=4.0V$

# MBR3020W THRU MBR30100W

## 30 Amp Schottky Barrier Rectifier 20 to 100 Volts

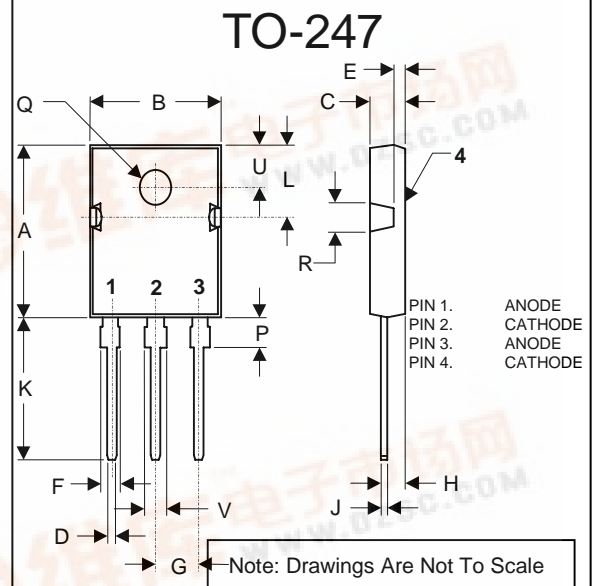

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MIN	
A	.803	.823	20.40	20.90	
B	.608	.628	15.44	15.95	
C	.185	.205	4.70	5.21	
D	.043	.051	1.09	1.30	
E	.059	.064	1.50	1.63	
F	.071	.086	1.80	2.18	
G	.215	BSC	5.45	BSC	
H	.101	.130	2.56	2.87	
J	.019	.027	0.48	0.68	
K	.613	.633	15.57	16.08	
L	.286	.295	7.26	7.50	
P	.122	.133	3.10	3.38	
Q	.138	.145	3.50	3.70	
R	.130	.150	3.30	3.80	
U	.209	BSC	5.30	BSC	
V	.120	.134	3.05	3.40	

Pulse test: Pulse width 300 usec, duty cycle 2%.



# MBR3020W thru MBR30100W

FIG. 1 - FORWARD CURRENT DERATING CURVE

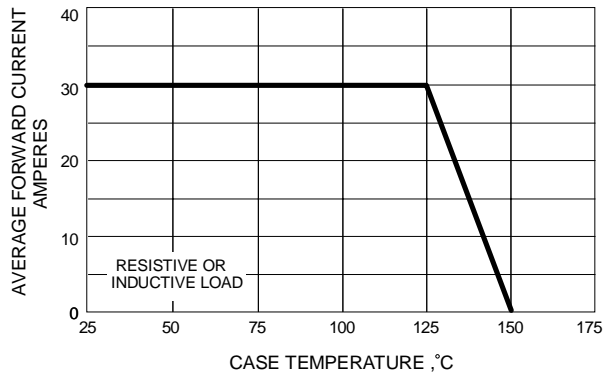


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

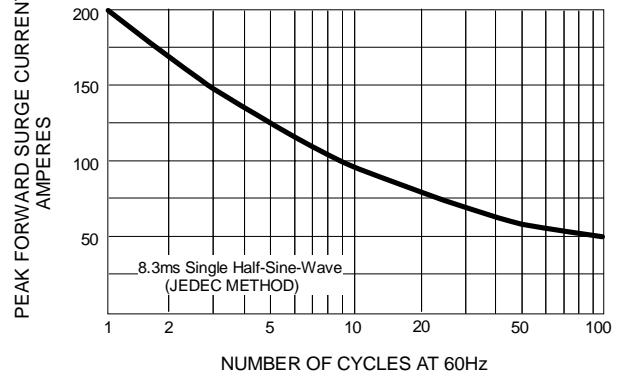


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

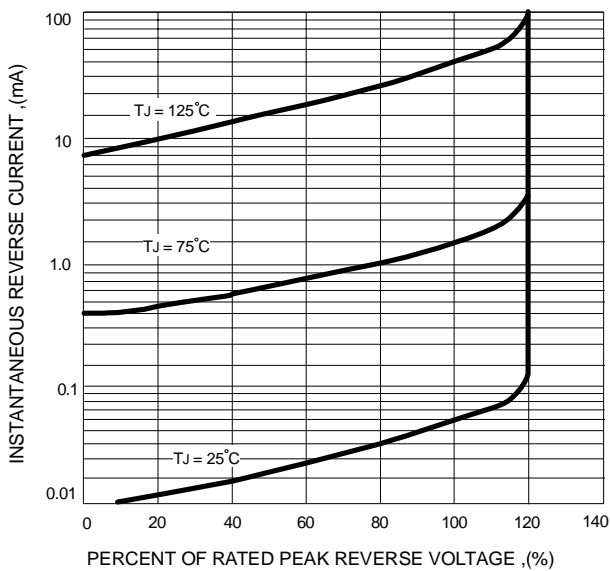


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

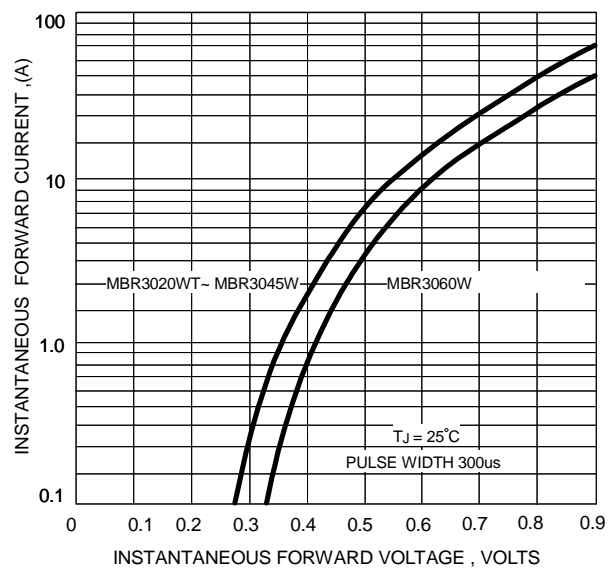


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

