

EXCHANGE AREA TELEPHONE CABLE


REA PE-22 AERIAL AND DUCT

DESCRIPTION:

Solid bare copper, polyethylene insulated, twisted pairs, .008 aluminum corrugated shield, black polyethylene overall.

COLOR CODE:

See Chart 9, Back Cover.

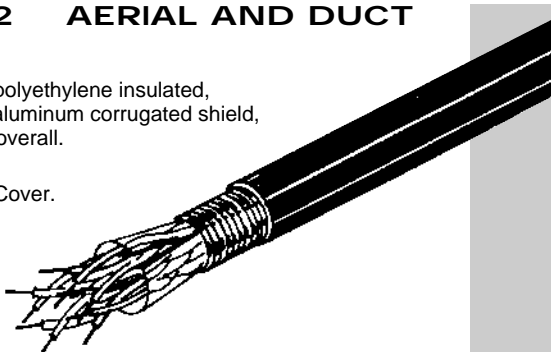

DIRECT BURIAL

DESCRIPTION:


Solid bare copper, polypropylene insulated, twisted pairs, pairs cabled into cores, filled with polyethylene jelly, binder tape, corrugated shield. The shield is flooded on both sides with polyethylene jelly, polyethylene jacket.

COLOR CODE:

See Chart 9, Back Cover.

*Available with:

- .005 Copper shield
- .008 Alum. shield
- .006 Copper clad steel shield

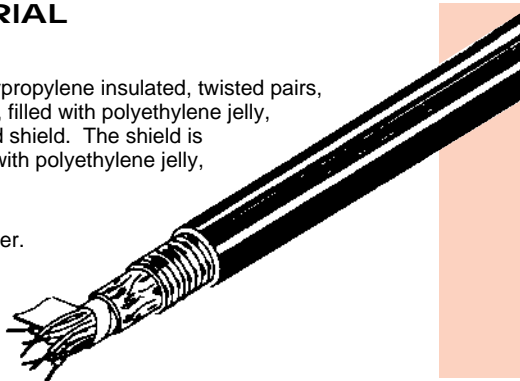

OLYMPIC NO.	NO. OF PAIRS & COND. SIZE (AWG)	JACKET THICKNESS	NOM. O.D.
6973	6/22	.060"	.420"
6974	12/22	.060"	.490"
6975	18/22	.060"	.560"
6976	25/22	.060"	.630"
6977	50/22	.070"	.800"
6978	100/22	.080"	1.130"
6979	6/19	.060"	.500"
6980	12/19	.060"	.630"
6981	18/19	.060"	.730"
6982	25/19	.060"	.820"
6983	50/19	.070"	1.130"
6984	100/19	.080"	1.530"
6990*	6/22	.040"	.480"
6991*	12/22	.040"	.550"
6993*	25/22	.040"	.690"
6994*	50/22	.040"	.860"
6995*	100/22	.050"	1.190"
6996*	6/19	.040"	.560"
6997*	12/19	.040"	.690"
6999*	25/19	.040"	.880"
6985*	50/19	.050"	1.190"
6986*	100/19	.050"	1.590"

INSIDE TELEPHONE CABLE


CATEGORY 3 10 BASE T

UL CLASSIFIED CMR

DESCRIPTION:

Solid bare copper, vinyl insulated, twisted pairs, beige or gray vinyl jacket, with nylon rip cord.

COLOR CODE: Standard telephone color coding, see Chart 9, Back Cover.

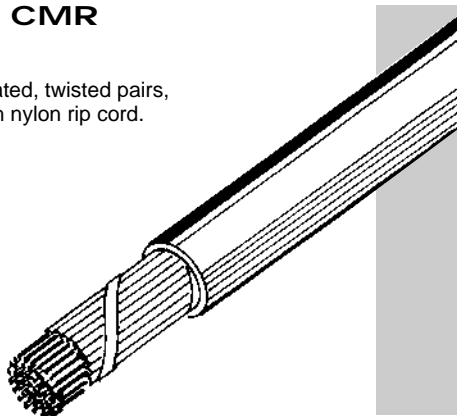

OLYMPIC NO.	NO. OF PAIRS	COND. SIZE (AWG)	NOM. JACKET THICK.	NOM. O.D.
3077	2	24	.014"	.130"
3079	3	24	.014"	.150"
3078	4	24	.014"	.160"
3080	6	24	.015"	.185"
3081	12	24	.015"	.245"
3082	16	24	.015"	.300"
3083	25	24	.015"	.330"
3084	32	24	.030"	.400"
3085	50	24	.030"	.520"
3086	75	24	.030"	.600"
3087	100	24	.030"	.680"