


Bulletin I2136 04/97

International
IR Rectifier

SAFEIR Series
30TPS..

PHASE CONTROL SCR



V_T	$< 1.3V @ 20A$
I_{TSM}	$= 300A$
V_{RRM}	800 to 1600V

Description/Features


The 30TPS.. **SAFEIR** series of silicon controlled rectifiers are specifically designed for medium power switching and phase control applications. The glass passivation technology used has reliable operation up to 125°C junction temperature.

Typical applications are in input rectification (soft start) and these products are designed to be used with International Rectifier input diodes, switches and output rectifiers which are available in identical package outlines.

Major Ratings and Characteristics

Characteristics	30TPS..	Units
$I_{T(AV)}$ Sinusoidal waveform	20	A
I_{RMS}	30	A
V_{RRM}/V_{DRM}	up to 1600	V
I_{TSM}	300	A
$V_T @ 20A, T_J = 25^\circ C$	1.3	V
dv/dt	500	V/ μs
di/dt	150	A/ μs
T_J	- 40 to 125	$^\circ C$

Package Outline

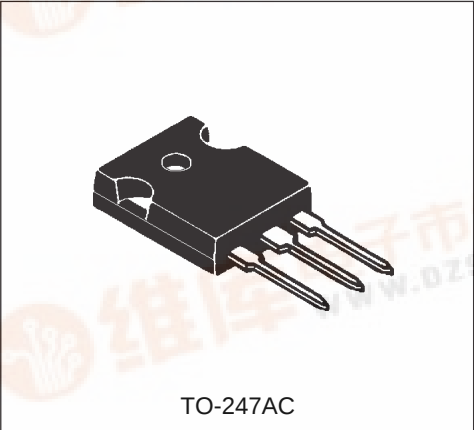

30TPS.. *SAFEIR* Series

Bulletin I2136 04/97

International
IOR Rectifier

Voltage Ratings

Part Number	V_{RRM}/V_{DRM} , max. repetitive peak and off-state voltage V	V_{RSM} , maximum non repetitive peak reverse voltage V	I_{RRM}/I_{DRM} 125°C mA
30TPS08	800	900	10
30TPS12	1200	1300	
30TPS16	1600	1700	

Absolute Maximum Ratings

Parameters		30TPS..	Units	Conditions	
I _{T(AV)}	Max. Average On-state Current	20	A	@ T _c = 95° C, 180° conduction half sine wave	
I _{RMS}	Max. RMS On-state Current	30			
I _{TSM}	Max. Peak One Cycle Non-Repetitive	250		10ms Sine pulse, rated V _{RRM} applied	
	Surge Current	300		10ms Sine pulse, no voltage reapplied	
I ² t	Max. I ² t for Fusing	310	A ² s	10ms Sine pulse, rated V _{RRM} applied	
		442		10ms Sine pulse, no voltage reapplied	
I ² √t	Max. I ² √t for Fusing	4420	A ² √s	t = 0.1 to 10ms, no voltage reapplied	
V _{TM}	Max. On-state Voltage Drop	1.3	V	@ 20A, T _j = 25° C	
r _t	On-state Slope Resistance	12	mΩ	T _j = 125° C	
V _{T(TO)}	Threshold Voltage	1.0	V		
I _{RM} /I _{DM}	Max.Reverse and Direct	0.5	mA	T _j = 25 °C	V _R = rated V _{RRM} / V _{DRM}
	Leakage Current	10		T _j = 125 °C	
I _H	Max. Holding Current	100	mA	Anode Supply = 6V, Resistive load, Initial I _T = 1A	
I _L	Max. Latching Current	200	mA	Anode Supply = 6V, Resistive load	
dv/dt	Max. Rate of Rise of off-state Voltage	500	V/μs		
di/dt	Max. Rate of Rise of turned-on Current	150	A/μs		

Triggering

Parameters	30TPS..	Units	Conditions
P_{GM} Max. Peak Gate Power	8.0	W	
$P_{G(AV)}$ Max. Average Gate Power	2.0		
$+I_{GM}$ Max. Peak Positive Gate Current	1.5	A	
$-V_{GM}$ Max. Peak Negative Gate Voltage	10	V	
I_{GT} Max. Required DC Gate Current to Trigger	60	mA	Anode supply = 6V, resistive load, $T_J = -10^\circ\text{C}$
	45		Anode supply = 6V, resistive load, $T_J = 25^\circ\text{C}$
	20		Anode supply = 6V, resistive load, $T_J = 125^\circ\text{C}$
V_{GT} Max. Required DC Gate Voltage to Trigger	2.5	V	Anode supply = 6V, resistive load, $T_J = -10^\circ\text{C}$
	2.0		Anode supply = 6V, resistive load, $T_J = 25^\circ\text{C}$
	1.0		Anode supply = 6V, resistive load, $T_J = 125^\circ\text{C}$
V_{GD} Max. DC Gate Voltage not to Trigger	0.25		$T_J = 125^\circ\text{C}$, $V_{DRM} = \text{rated value}$
I_{GD} Max. DC Gate Current not to Trigger	2.0	mA	$T_J = 125^\circ\text{C}$, $V_{DRM} = \text{rated value}$

Switching

Parameters	30TPS..	Units	Conditions
t_{gt} Typical Turn-on Time	0.9	μs	$T_J = 25^\circ\text{C}$
t_{rr} Typical Reverse Recovery Time	4		$T_J = 125^\circ\text{C}$
t_q Typical Turn-off Time	110		

Thermal-Mechanical Specifications

Parameters	30TPS..	Units	Conditions
T_J Max. Junction Temperature Range	- 40 to 125	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	- 40 to 125		
R_{thJC} Max. Thermal Resistance Junction to Case	0.8	$^\circ\text{C/W}$	DC operation
R_{thJA} Max. Thermal Resistance Junction to Ambient	40		
R_{thCS} Max. Thermal Resistance Case to Heatsink	0.2		Mounting surface, smooth and greased
wt Approximate Weight	6 (0.21)	g (oz.)	
T Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	
	Max. 12 (10)		
Case Style	TO-247AC		Jedec (Modified)

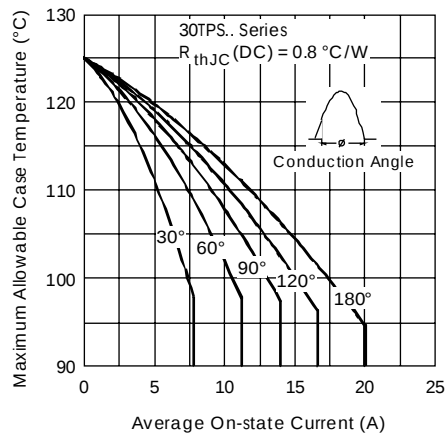


Fig. 1 - Current Rating Characteristics

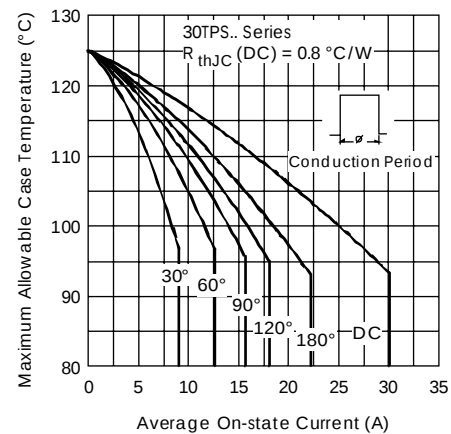


Fig. 2 - Current Rating Characteristics

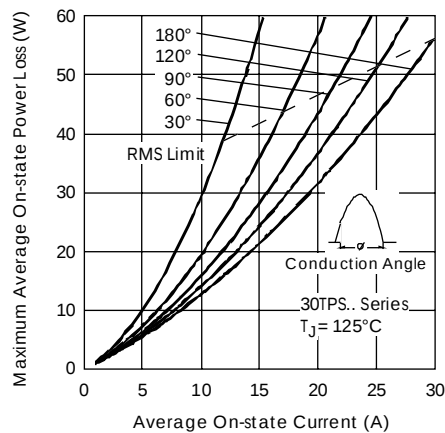


Fig. 3 - On-state Power Loss Characteristics

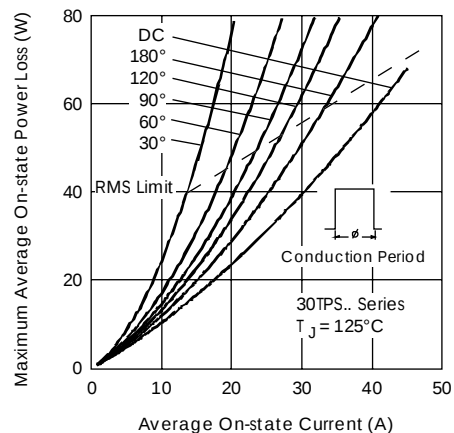


Fig. 4 - On-state Power Loss Characteristics

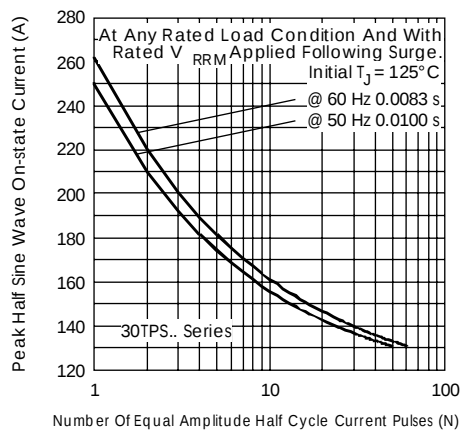


Fig. 5 - Maximum Non-Repetitive Surge Current

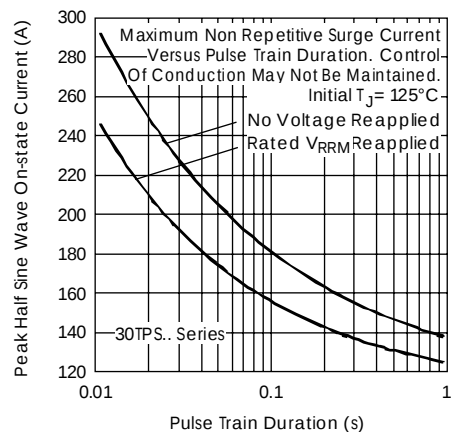


Fig. 6 - Maximum Non-Repetitive Surge Current

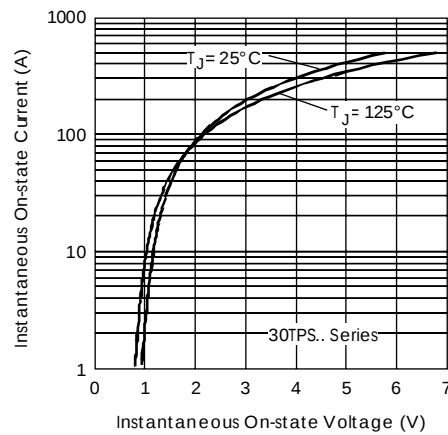


Fig. 7 - On-state Voltage Drop Characteristics

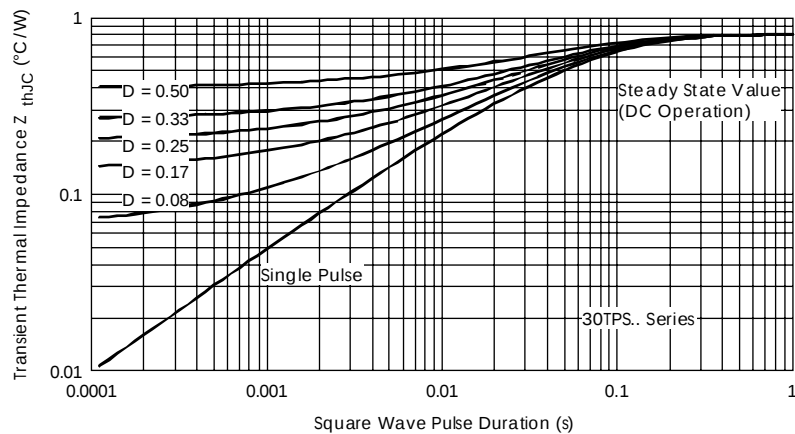


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics


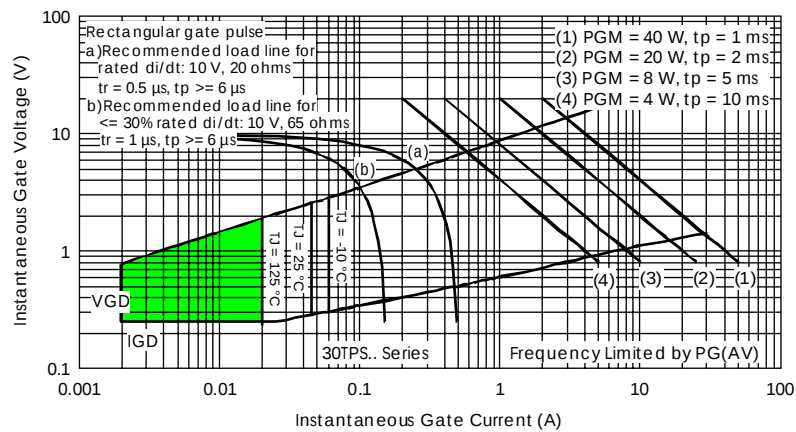


Fig. 9 - Gate Characteristics

Outline Table

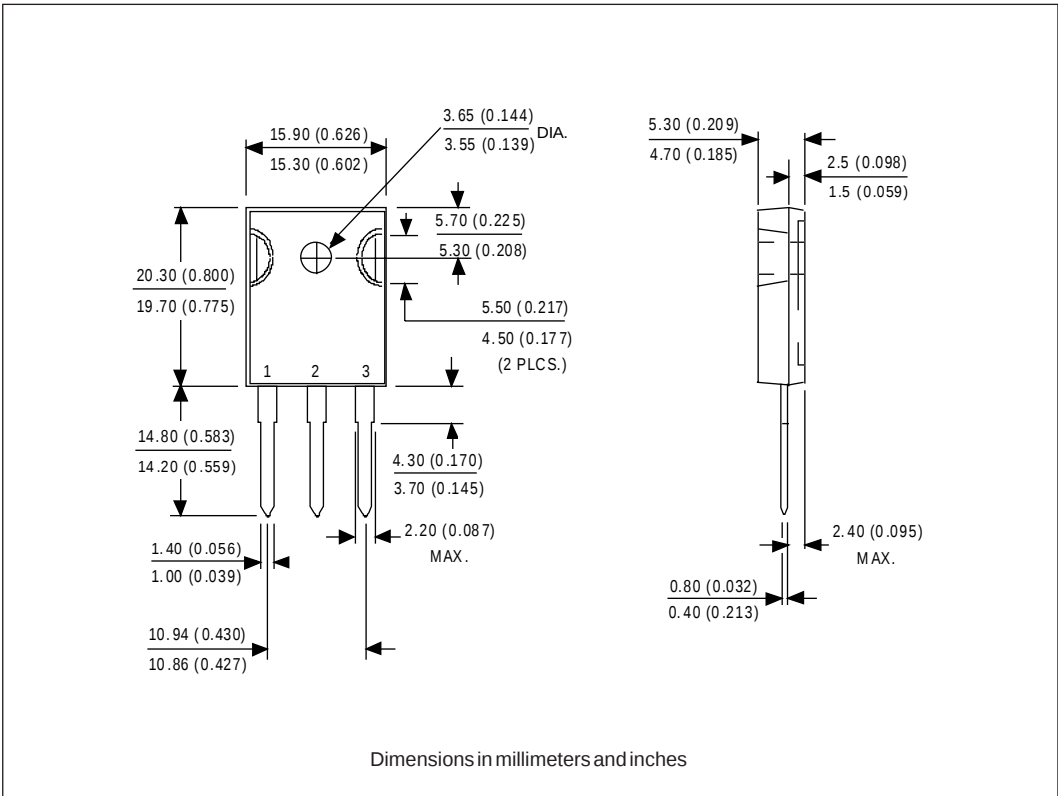

Ordering Information Table

Device Code				
30	T	P	S	16
1	2	3	4	5
1	Current Rating			
2	Circuit Configuration:			
	T = Thyristor			
3	Package:			
	T = TO-247			
4	Type of Silicon:			
	S = Standard Recovery Rectifier			
5	Voltage code: Code x 100 = V _{RRM}			
				08 = 800V
				12 = 1200V
				16 = 1600V