

FUSEHOLDERS

Panel mount

FPG1

for 5 × 20 mm


Fuseholder Type FPG1

front side,
fixing nut fastening
shocksafe category PC2
available in lead-free version

NEW



Fingergrip



- bayonet type fuse carrier, slotted or finger-grip
- solder-/quick-connect terminals 4,8 x 0,5 mm
- degree of protection IP40 or IP67 from frontside according to IEC 60529
- sealed from the rear
- suitable for equipment with protection classes I and II according to IEC 60536

Technical data

- Rated voltage: 250 V
- Rated current: 10 A
- Rated power acceptance at ambient air temperature T_a 23 °C: 2,5 W
- Power acceptance at higher T_a : see derating curves
- Take note of the information on pages 215–219
- Allowable ambient air temperatures T_a for accessible parts: -40 °C to +85 °C
- Torque/Fixing nut: max. 1,2 Nm

Additional technical data see page 140

Standards


IEC 60127-6
EN 60127-6
UL 512, CSA C22.2-39

Approvals, Patents


| | | | |
|--|--------------------|--|------------------|
| | SEV (10 A/250 V) | | UL (16 A/250 V) |
| | VDE (10 A/250 V) | | CSA (16 A/250 V) |
| | SEMKO (10 A/250 V) | | |

Patents in U.S. (No. 4,453,794/4,536,054) and in further countries

Panel thickness max. Fixing nut, SW 14

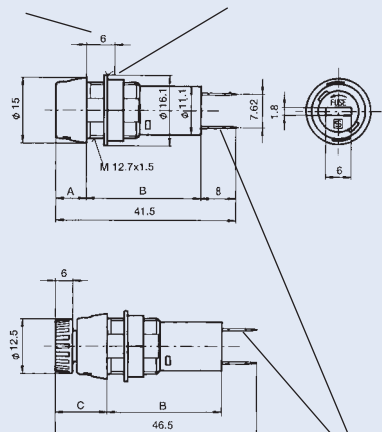


solder-/quick-connect terminals 4,8 x 0,5 mm, tin plated, for conductor cross-sections up to 2,5 mm²



Panel mounting holes

| | A | B | C |
|------|-----|------|------|
| IP40 | 7 | 26,5 | 12 |
| IP67 | 7,6 | 25,9 | 12,6 |

Derating curve

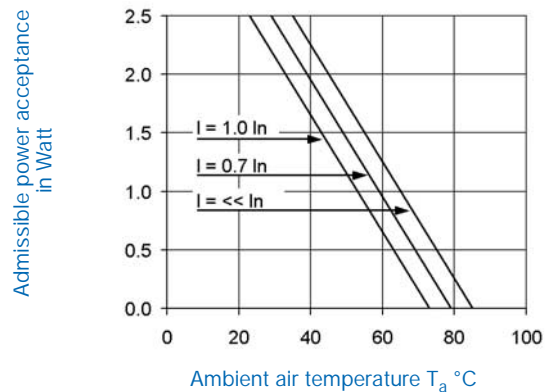

| Order No. | Fuseholder complete, black | Fuse carrier | Degree of protection |
|-----------|----------------------------|--------------|----------------------|
| 3101.0010 | Fuseholder complete, black | slotted | IP 40 |
| 3101.0015 | Fuseholder complete, black | Fingergrip | IP 40 |
| 3101.0110 | Fuseholder complete, black | slotted | IP 67 |
| 3101.0115 | Fuseholder complete, black | Fingergrip | IP 67 |

• **New** .BF for lead-free version
Accessories see page 183

**Additional technical data
to fuseholders
Types FPG1 to FPG6**

Technical data

| | |
|---|--|
| Contact resistance | 5 mΩ |
| Dielectric strength (AC / 1 Min.) | > 3 kV between live parts of different potentials > 4 kV between metal mounting plate and live parts / |
| Impuls withstand voltage \bar{U} 1,2/50 | > 7 kV between live parts of different potentials > 12 kV between metal mounting plate and live parts |
| Insulation resistance (500 V DC / 1Min.) | > 2x10 ⁶ MΩ between live parts of different potentials > 1x10 ⁶ MΩ between metal mounting plate and live parts |
| Overvoltage category | I to III |
| Pollution degree | 1 to 3 |
| Clearance and creepage distances | > 3 mm between live parts of different potentials > 8 mm between metal mounting plate and live parts (for appliances of protection class II) |
| Resistance to vibration | Frequency range 10–500 Hz, cross-over frequency 60 Hz < 60 Hz constant amplitude of 0,75 mm > 60 Hz constant acceleration of 10 g according to IEC 60068-2-6, test Fc |
| Climatic category | 40/085/21 acc. to IEC/EN 60068-1 |
| Terminals: Solderability | Types FPG 1/2/3/6: 350 °C / 2 s according to IEC 60068-2-20, test Ta, method 2 Types FPG 4/5: 350 °C / 2 s according to IEC 60068-2-20, test Ta, method 1 |
| Resistance to soldering heat | Types FPG 1/2/3/6: 350 °C / 10 s according to IEC 60068-2-20, test Tb, method 2 Types FPG 4/5: 350 °C / 5 s according to IEC 60068-2-20, test Tb, method 1B |
| Materials: Socket and cap | thermoplastic, flammability class UL 94V-0 (nut: UL 94V-1) Temp.-Index RTI > 140 °C (nut: 125 °C), Comparative Tracking-Index CTI > 175 |
| Current conducting parts | copper alloy, protected against corrosion |