

IEC appliance inlet C14, screw-on mounting, front side, solder terminal



C14  
  
 70 °C



### Description

- Panel Mount:  
Screw-on mounting on PCB from front side
- Inlet, Pin temperature 70 °C, Protection class I
- For PCB mounting

### Approvals

- VDE License Number: 40022665
- UL License Number: E96454

### Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Ratings IEC	10A / 250VAC; Hz 50
Ratings UL/CSA	10A / 250VAC; 60Hz
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	For PCB mounting
Panel Thickness s	Screw-on mounting on PCB: max 1.6 mm Mounting screw torque
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet /-Outlet	C14 acc. to IEC/EN 60320-1, UL 498, CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10A, Protection class I
--------------------------	--

### Dimensions

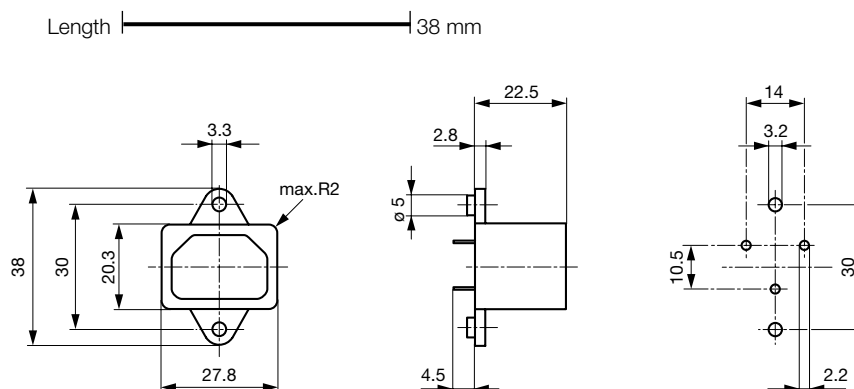

### Variants

Panel mounting	Panel Thickness s [mm]	Order Number
Screw-on mounting on PCB	1.6	4300.0076

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

**Packaging unit** 50 Pcs