

2SD2469, 2SD2469A

Silicon NPN epitaxial planar type

For power switching


Complementary to 2SB1607

Features

- Low collector to emitter saturation voltage $V_{CE(sat)}$
- Satisfactory linearity of forward current transfer ratio h_{FE}
- Large collector current I_C
- Full-pack package with outstanding insulation, which can be installed to the heat sink with one screw

Absolute Maximum Ratings ($T_C=25^\circ C$)

Parameter	Symbol	Rated	Unit
Collector to base voltage	V_{CBO}	130	V
2SD2469A		150	
Collector to emitter voltage	V_{CEO}	80	V
2SD2469A		100	
Emitter to base voltage	V_{EBO}	7	V
Peak collector current	I_{CP}	15	A
Collector current	I_C	7	A
Collector power dissipation	P_C	40	W
$T_C=25^\circ C$ $T_a=25^\circ C$		2	
Junction temperature	T_j	150	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$

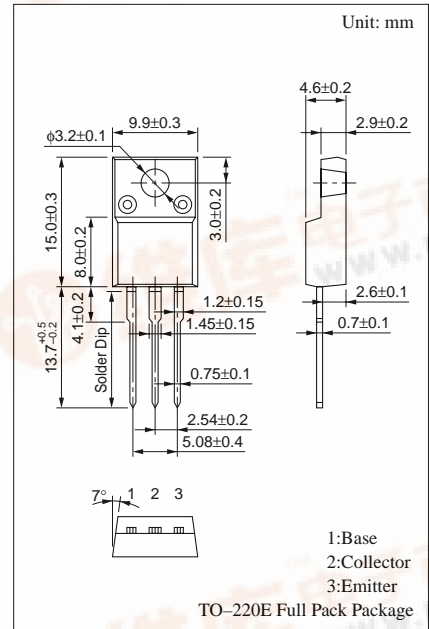

Electrical Characteristics ($T_C=25^\circ C$)


Parameter	Symbol	Conditions	min	typ	max	Unit	
Collector cutoff current	I_{CBO}	$V_{CB} = 100V, I_E = 0$			10	μA	
Emitter cutoff current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			50	μA	
Collector to emitter voltage	V_{CEO}	$I_C = 10mA, I_B = 0$	80			V	
2SD2469A			100				
Forward current transfer ratio	h_{FE1}	$V_{CE} = 2V, I_C = 0.1A$	45				
	h_{FE2}^*	$V_{CE} = 2V, I_C = 3A$	90		260		
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = 5A, I_B = 0.25A$			0.5	V	
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = 5A, I_B = 0.25A$			1.5	V	
Transition frequency	f_T	$V_{CE} = 10V, I_C = 0.5A, f = 10MHz$		30		MHz	
Turn-on time	t_{on}	$I_C = 3A, I_{B1} = 0.3A, I_{B2} = -0.3A, V_{CC} = 50V$		0.5		μs	
Storage time	t_{stg}				1.5		μs
Fall time	t_f				0.1		μs




PDF Rank Classification

Rank	Q	P
h_{FE2}	90 to 180	130 to 260


$P_C - T_a$

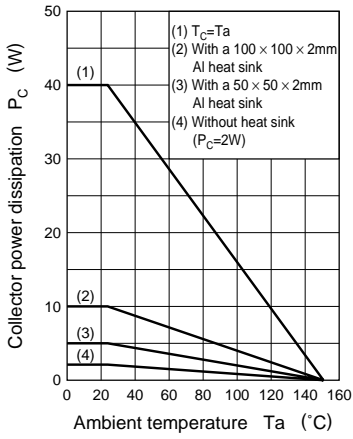


$I_C - V_{CE}$

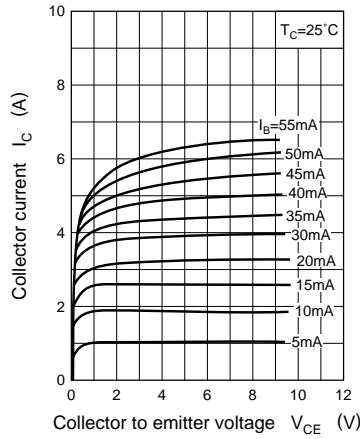


$V_{CE(sat)} - I_C$

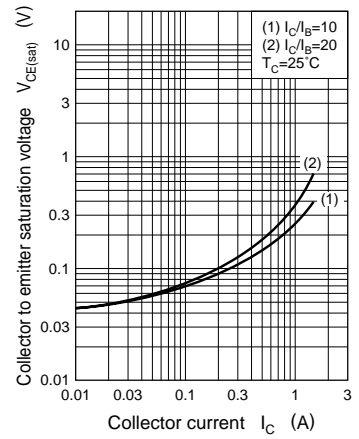


$V_{CE(sat)} - I_C$

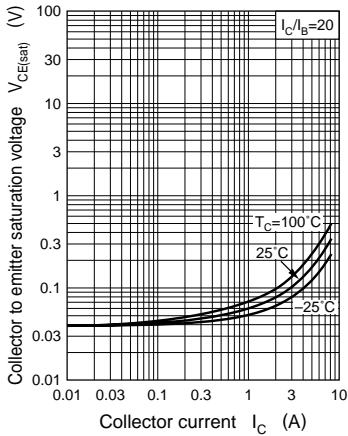


$V_{BE(sat)} - I_C$

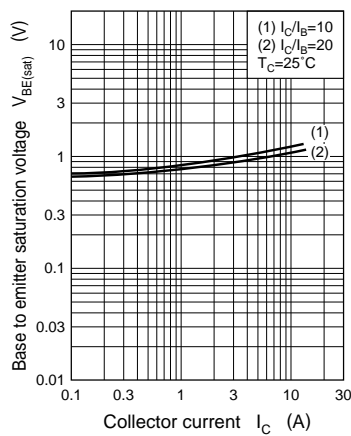


$V_{BE(sat)} - I_C$

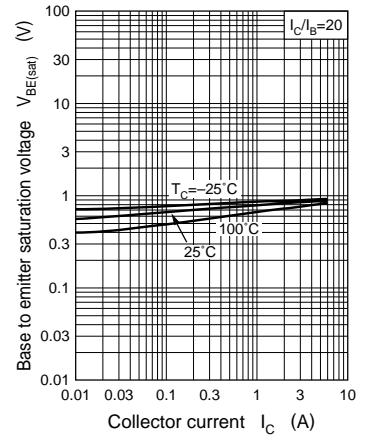


$h_{FE} - I_C$

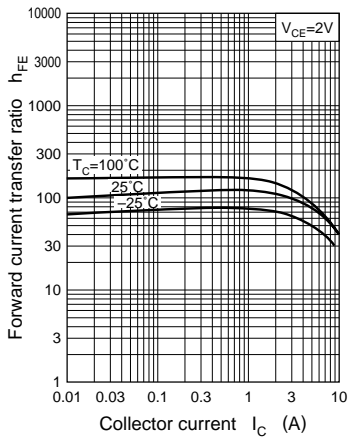


$f_T - I_C$

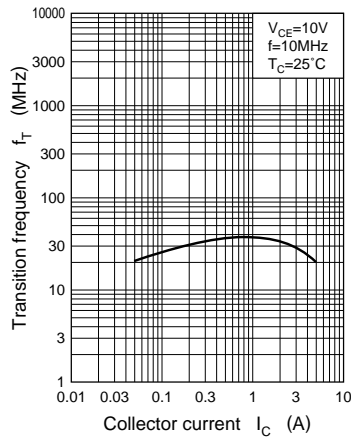


$C_{ob} - V_{CB}$

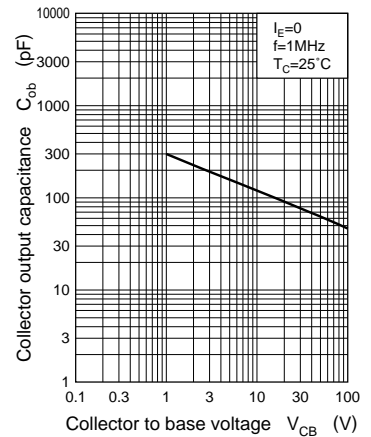

$t_{on}, t_{stg}, t_f - I_C$

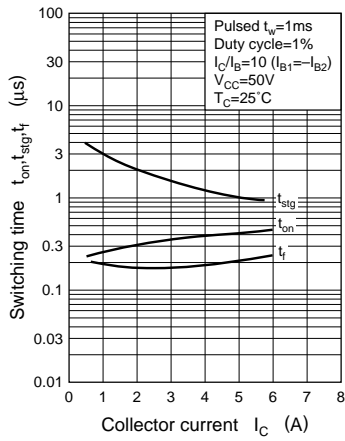

Area of safe operation (ASO)

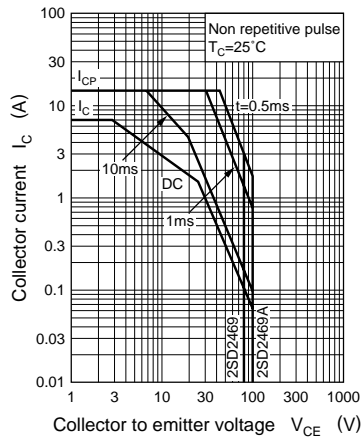

$R_{th(t)} - t$

