
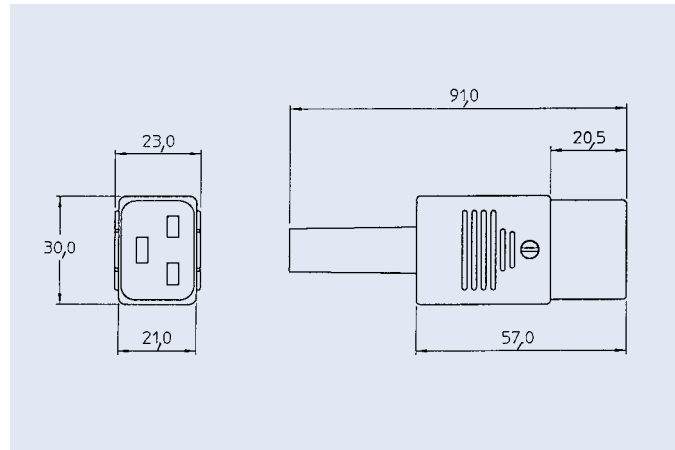


Rewireable Connector for cable, straight entry Type 4795

Pin temperature 70 °C
Protection class I





Order no	Colour	Max. cable diameter	Max. wire size
4795.0000	black	10 mm	3 x 2 mm ² / 14 AWG

Cord retaining clamp see page 171

Rewireable Plug for cable straight entry Type 4796

Pin temperature 70 °C
Protection class I

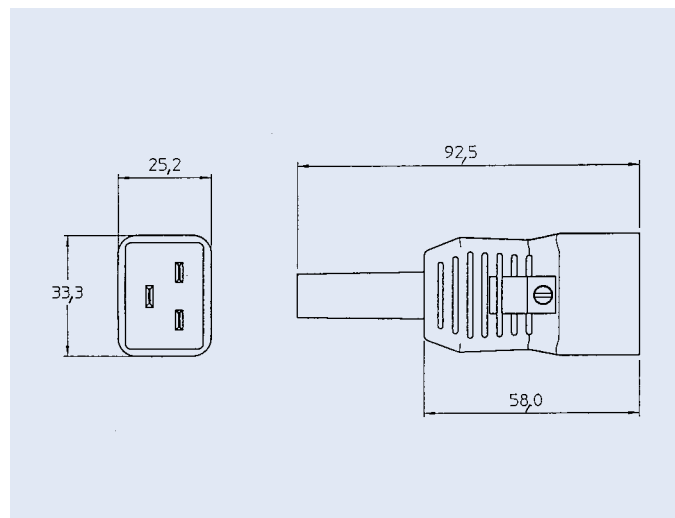

Order no	Colour	Max. cable diameter	Max. wire size
4796.0000	black	10 mm	3 x 2 mm ² / 14 AWG

Cord retaining clamp see page 171

Details Types 4795, 4796

Technical data

- Rated current/voltage: 16 A/250 VAC
- Insulation resistance: > 10 MΩ (500 VDC, 1 Min.)
- Dielectric strength: 2 kV (50 Hz, 1 Min.), to accessible surfaces
- Materials:
 - Body and cable guard: Thermoplastic UL 94V-0

Standards

Type 4795: IEC/EN 60320-1/C19
4796: IEC/EN 60320-2-2/I

Approvals

VDE (16 A / 250 VAC)
 UL/CSA (21 A / 250 VAC)