



Alpha Wire Company

Home

Master
Catalog OnlineDistributor
ResourcesProduct
Discovery CenterTechnical
ResourcesNew and Featured
Products

Corporate

International



LOCAL AREA NETWORK

IEEE-488 (GPIB) INTERFACE BUS CABLES

300 VOLT, 80°C

 Download this page
in PDF format

FIT[®] TUBING RECOMMENDATION

CHARACTERISTICS

Operating Temperature:

- 20° C to 80°C

Voltage Rating:

- 300 Volt



Color Description:

- Refer to Color Description Chart Below


Product Description:

- D.C. Resistance :
 - #24 AWG - 23.9 ohms/kft (78,4 ohms/km)
 - #26 AWG - 38.4 ohms/kft (126,0 ohms/km)
- Capacitance: Conductor to Conductor, Nominal:
 - Single Conductors - 35 pF/ft (114,8 pF/m)
 - Pairs - 38 pF/ft (124,7 pF/m)
- Characteristic Impedance, Nominal:
 - Single Conductors - 70 ohms
 - Pairs - 75 ohms
- 6 Twisted Pairs Conductors #26 AWG (7/34) Tinned Copper + .010" Semi-Rigid PVC Insulation
- 10 Single Conductors #26 AWG (7/34) Tinned Copper + .010" Semi-Rigid PVC Insulation
- 1 Single Conductors #24 AWG (7/32) Tinned Copper + .010" Semi-Rigid PVC Insulation
- Drain Wire: #24 AWG (7/32) Tinned Copper
- Shield : Braided Tinned Copper (90% Coverage)
- Jacket: Gray PVC 0.035" (0,89mm) Nominal Wall Thickness
- Nominal O.D.: 0.350" (8,89mm)

Alpha Wire 5900 assemblies are designed to meet the cable constructional and electrical parameters mandated by the IEEE-448 interface standard. Compliance with the guidelines of this standard allows as many as fifteen discrete devices, such as Digital test, measurement and recording units, configured to this standard, to communicate with each other with no need for custom designed bus-to-unit networks.

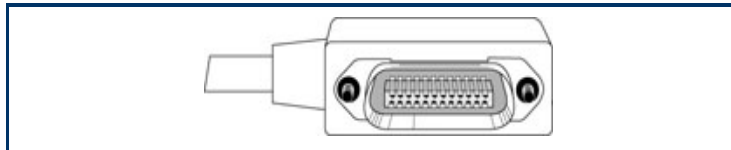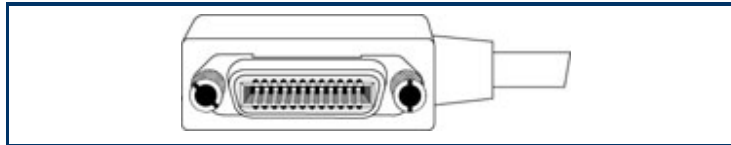

CONNECTOR DIMENSIONAL LAYOUT

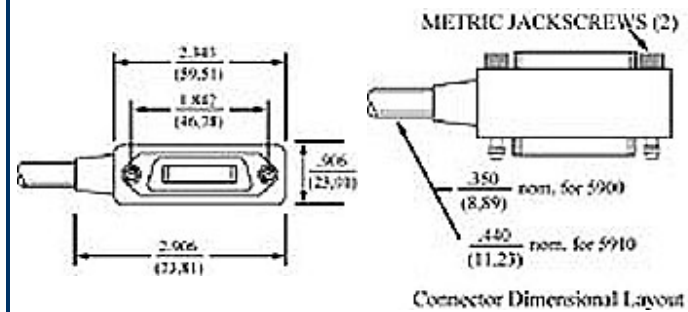

AVAILABILITY

- 1 piece package

5900/1	3.3	1
5900/2	6.6	2
5900/3	9.9	3
5900/4	13.1	4
5900/8	26.2	8
5900/12	39.4	12
5900/16	52.5	16

Molded Assemblies

Alpha provides molded assemblies using the IEEE standard 488 24-pin connector. Field replacement of damaged cable or changes in system configuration can be effected without costly down-time. A wide range of available lengths makes these assemblies ideal for system development, reconfiguration and maintenance.

Twisted Pairs

1. Blue paired with white/gray
2. Violet paired with white/black/brown
3. Gray paired with white/black/red
4. White paired with white/black/orange
5. White/black paired with white/black/yellow
6. White/brown paired with white/black/green

#26 AWG (0,14mm²) Singles

- | | |
|-----------|------------------|
| 1. Brown | 6. White/orange |
| 2. Red | 7. White/yellow |
| 3. Orange | 8. White/green |
| 4. Yellow | 9. White/blue |
| 5. Green | 10. White/violet |

#24 AWG (0,23mm²) Single


1. White/blue/black

Email: info@alphawire.com

Toll Free: 1-800-52 ALPHA | Telephone: 908-925-8000 | Fax: 908-925-6923

Europe/UK Telephone: +44 (0) 800 288 8809 | Europe/UK Fax: +44 (0) 1932 772433

Master Catalog Page



Copyright © 2006 Alpha Wire Company ALL RIGHTS RESERVED.

Use of this Web Site indicates you accept the [Terms of Use](#) listed in the [Legal Information and Terms Of Use](#) Document.