


50 Amp Schottky Rectifier 1N6097-1N6098

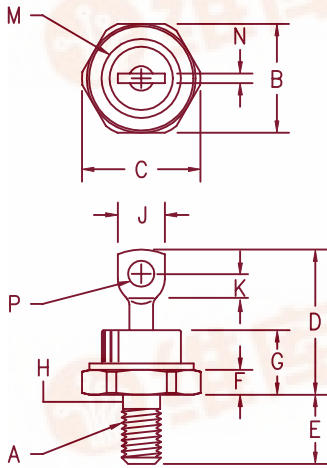

- Notes:
1. Full threads within 2 1/2 threads
 2. Standard Polarity: Stud is Cathode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1/4-28
B	.669	.687	17.19	17.44	
C	---	.794	---	20.16	
D	---	1.000	---	25.40	
E	.422	.453	10.72	11.50	
F	.115	.200	2.93	5.08	
G	---	.450	---	11.43	
H	.220	.249	5.58	6.32	1
J	---	.375	---	9.52	
K	.156	---	3.96	---	
M	---	.515	---	13.08	Dia.
N	---	.080	---	2.03	
P	.140	.175	3.56	4.45	Dia.

D0203AB (D05)

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
1N6097	30V	30V
1N6098	40V	40V

- Schottky Barrier Rectifier
- 150°C Junction Temperature
- Guard Ring Protection
- VRRM - 30 to 40 Volts
- Reverse Energy Tested


Electrical Characteristics

Average forward current	I _{F(AV)} 50 Amps	$T_C = 70^\circ\text{C}$, square wave, $R_{\theta JC} = 1.0^\circ\text{C/W}$ 8.3 ms, half sine $T_J = 150^\circ\text{C}$ $f = 1 \text{ KHz}$, 25°C , 1 μsec square wave $I_{FM} = 10\text{A}$: $T_J = 25^\circ\text{C}^*$ $I_{FM} = 157\text{A}$: $T_J = 70^\circ\text{C}^*$ V_{RRM} , $T_J = 125^\circ\text{C}^*$ V_{RRM} , $T_J = 25^\circ\text{C}$ $V_R = 1.0\text{V}$, $T_J = 25^\circ\text{C}$
Maximum surge current	I _{FSM} 800 Amps	
Max repetitive peak reverse current	I _{R(OV)} 2 Amps	
Max peak forward voltage	V _{FM} .60 Volts	
Max peak forward voltage	V _{FM} .86 Volts	
Max peak reverse current	I _{RM} 250 mA	
Max peak reverse current	I _{RM} 2 mA	
Max junction capacitance	C _J 7000 pF	

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-65°C to 150°C
Operating junction temp range	T _J	-65°C to 150°C
Max thermal resistance	R _{θJC}	1.0°C/W Junction to case
Max mounting torque		30 inch pounds
Weight		0.54 ounce (15.3 grams) typical



1N6097-1N6098

Figure 1
Typical Forward Characteristics

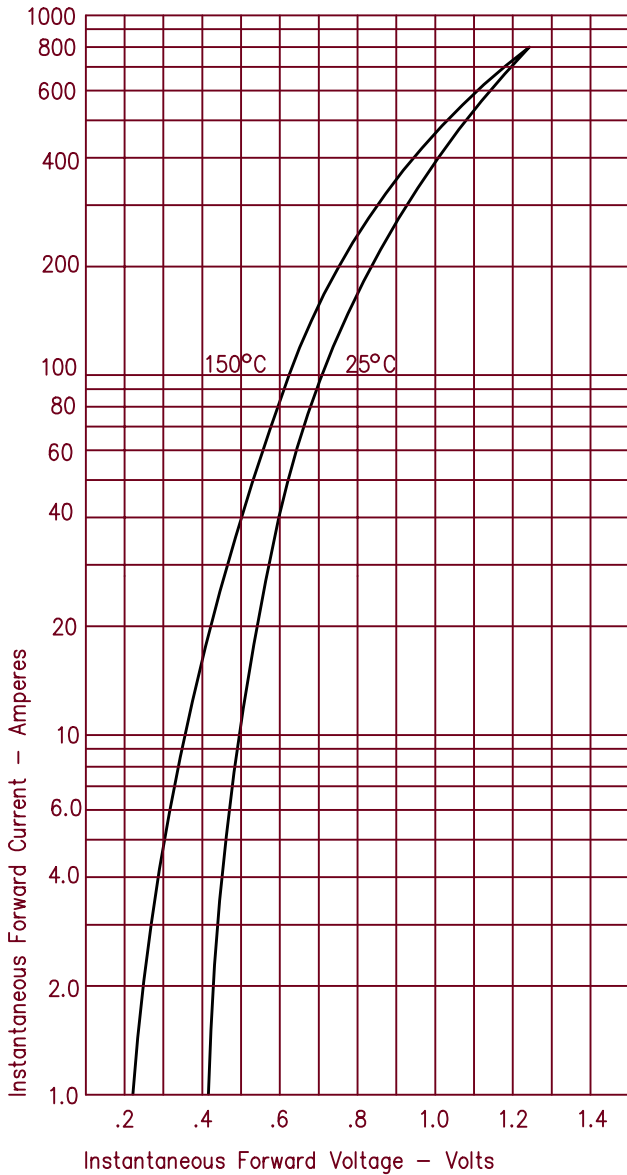


Figure 3
Typical Junction Capacitance

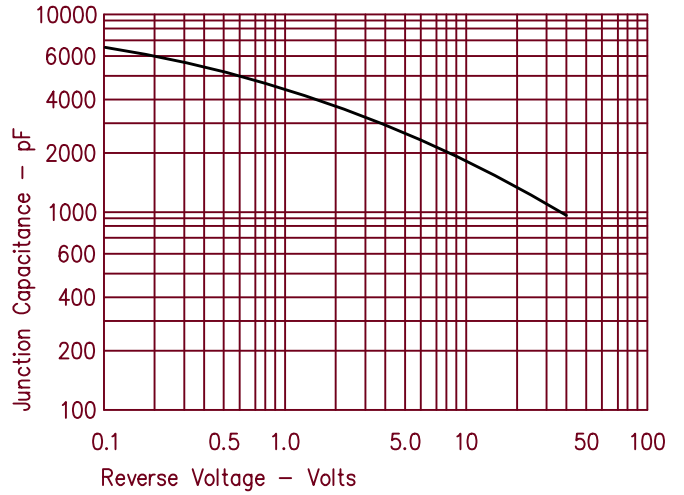


Figure 4
Forward Current Derating

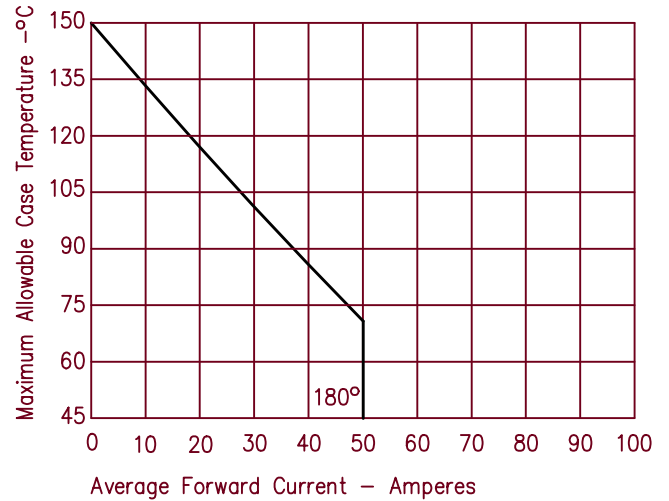


Figure 2
Typical Reverse Characteristics

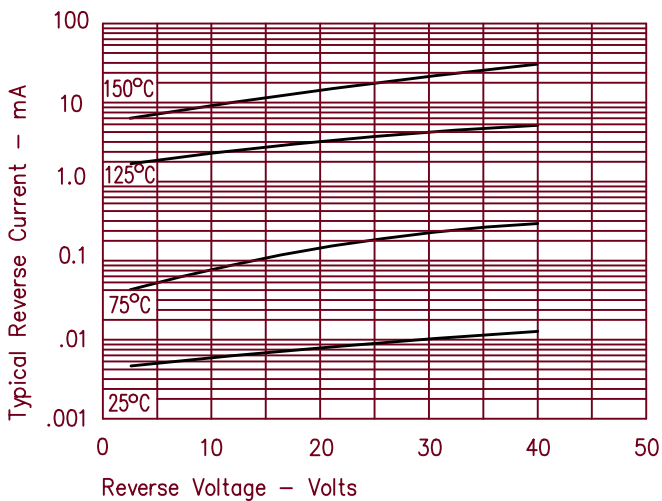


Figure 5
Maximum Forward Power Dissipation

