

IS61SP6464

64K x 64 SYNCHRONOUS PIPELINE STATIC RAM

JANUARY 2004

FEATURES

- Fast access time:
 - 117, 100 MHz
- Internal self-timed write cycle
- Individual Byte Write Control and Global Write
- Clock controlled, registered address, data and control
- Pentium™ or linear burst sequence control using MODE input
- Five chip enables for simple depth expansion and address pipelining
- Common data inputs and data outputs
- Power-down control by ZZ input
- JEDEC 128-Pin TQFP 14mm x 20mm package
- Single +3.3V power supply
- Control pins mode upon power-up:
 - MODE in interleave burst mode
 - ZZ in normal operation mode
 These control pins can be connected to GNDQ or VDDQ to alter their power-up state

DESCRIPTION

The ISSI IS61SP6464 is a high-speed, low-power synchronous static RAM designed to provide a burstable, high-performance, secondary cache for the i486™, Pentium™, 680X0™, and PowerPC™ microprocessors. It is organized as 65,536 words by 64 bits, fabricated with ISSI's advanced CMOS technology. The device integrates a 2-bit burst counter, high-speed SRAM core, and high-drive capability outputs into a single monolithic circuit. All synchronous inputs pass through registers controlled by a positive-edge-triggered single clock input.


Write cycles are internally self-timed and are initiated by the rising edge of the clock input. Write cycles can be from one to eight bytes wide as controlled by the write control inputs.

Separate byte enables allow individual bytes to be written. $\overline{BW1}$ controls I/O1-I/O8, $\overline{BW2}$ controls I/O9-I/O16, $\overline{BW3}$ controls I/O17-I/O24, $\overline{BW4}$ controls I/O25-I/O32, $\overline{BW5}$ controls I/O33-I/O40, $\overline{BW6}$ controls I/O41-I/O48, $\overline{BW7}$ controls I/O49-I/O56, $\overline{BW8}$ controls I/O57-I/O64, conditioned by $\overline{BWE}$ being LOW. A LOW on $\overline{GW}$ input would cause all bytes to be written.

Bursts can be initiated with either $\overline{ADSP}$ (Address Status Processor) or $\overline{ADSC}$ (Address Status Cache Controller) input pins. Subsequent burst addresses can be generated internally by the IS61SP6464 and controlled by the $\overline{ADV}$ (burst address advance) input pin.

Asynchronous signals include output enable ($\overline{OE}$), sleep mode input (ZZ), and burst mode input (MODE). A HIGH input on the ZZ pin puts the SRAM in the power-down state. When ZZ is pulled LOW (or no connect), the SRAM normally operates after the wake-up period. A LOW input, i.e., GNDQ, on MODE pin selects LINEAR Burst. A VDDQ (or no connect) on MODE pin selects INTERLEAVED Burst.


BLOCK DIAGRAM

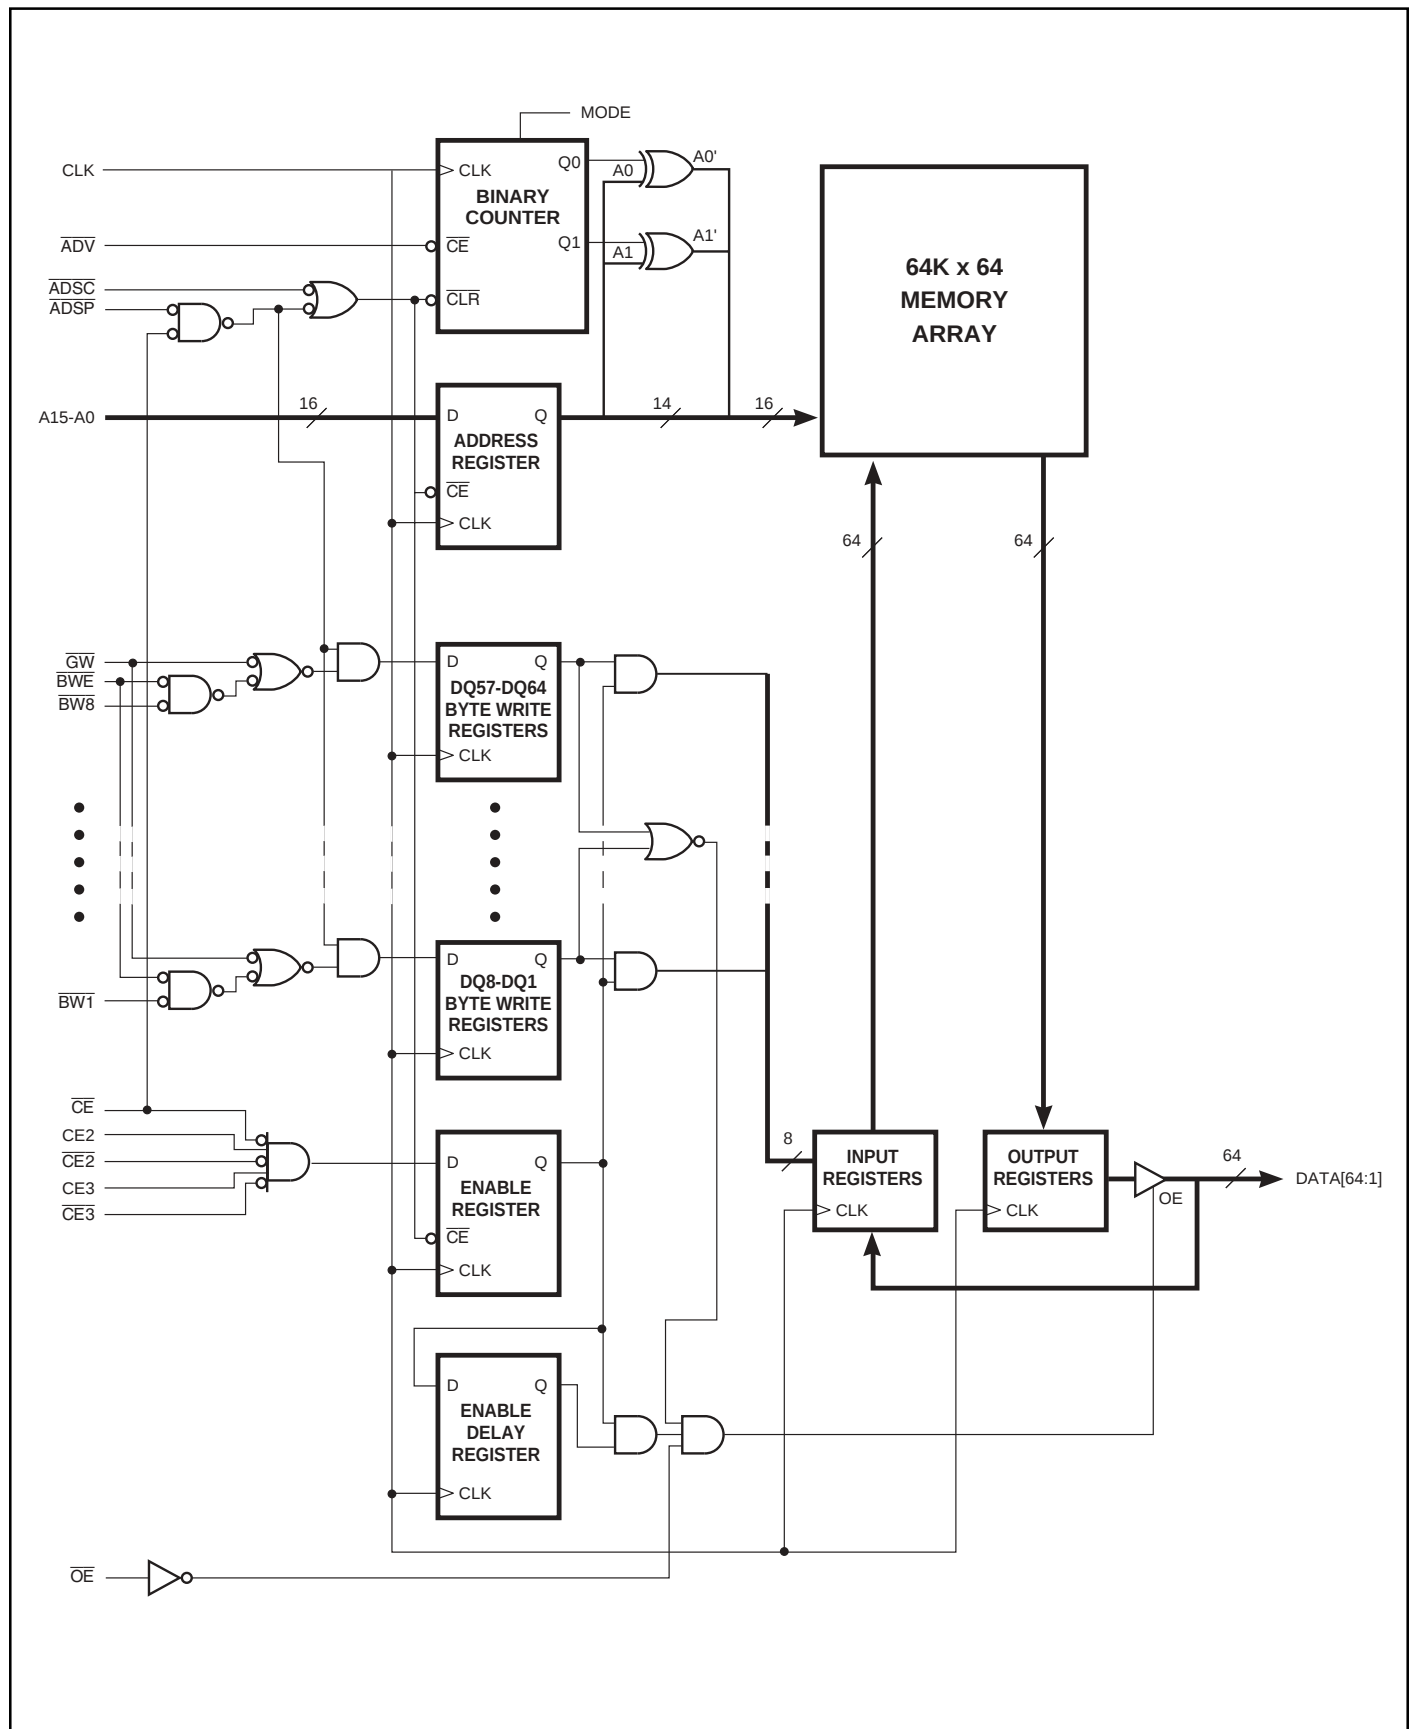

IS61SP6464

PIN CONFIGURATION

128-Pin TQFP/PQFP

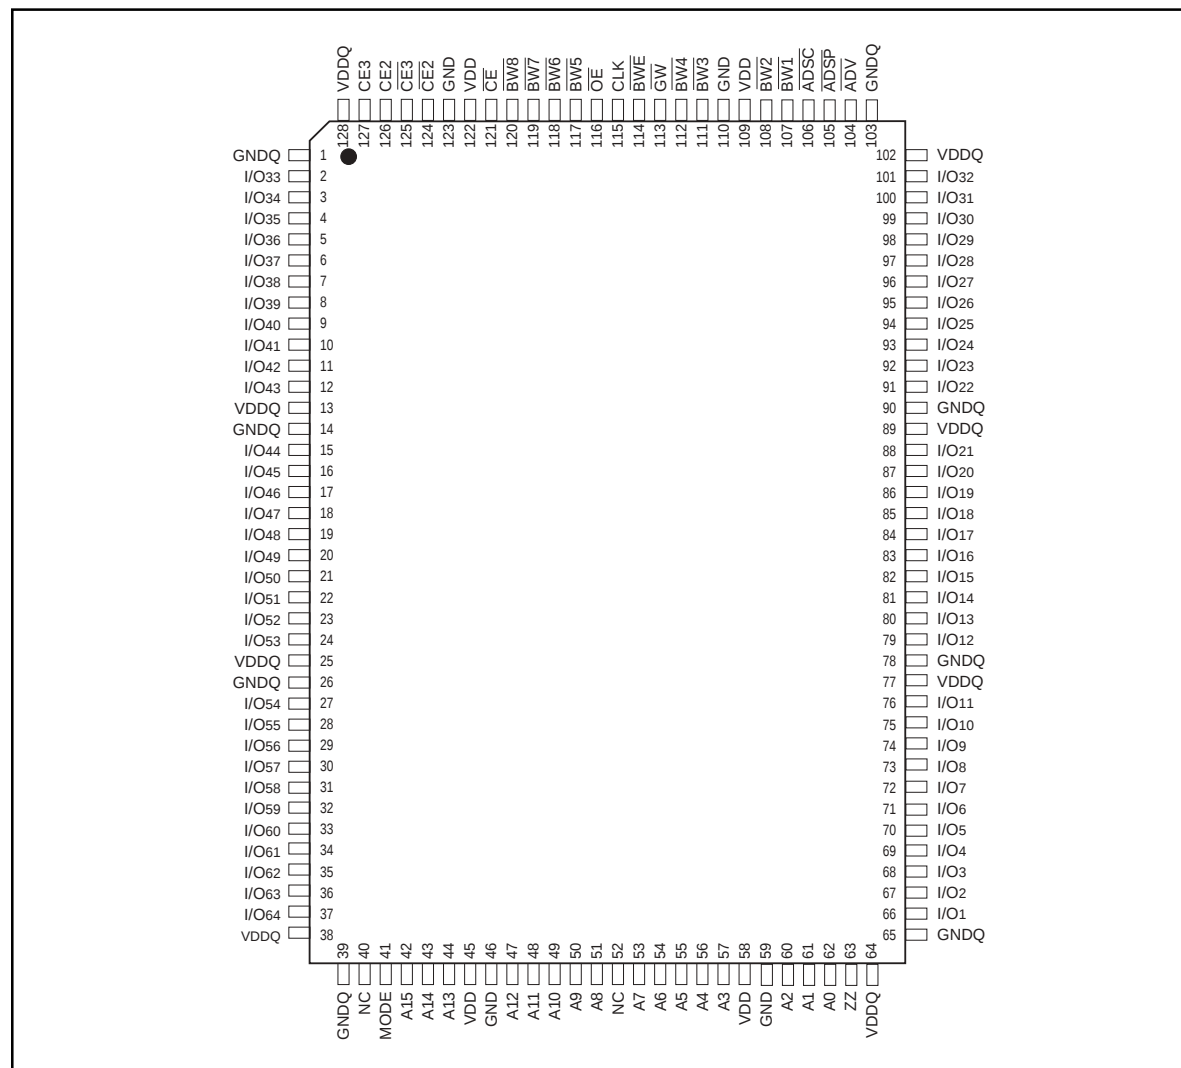

PIN DESCRIPTIONS

A0-A15	Address Inputs
CLK	Clock
ADSP	Processor Address Status
ADSC	Controller Address Status
ADV	Burst Address Advance
BW1-BW8	Synchronous Byte Write Enable
BWE	Byte Write Enable
GW	Global Write Enable
CE, CE2, CE2, CE3, CE3	Synchronous Chip Enable
OE	Output Enable

I/O1-I/O64	Data Input/Output
ZZ	Sleep Mode
MODE	Burst Sequence Mode
V _{DD}	+3.3V Power Supply
GND	Ground
V _{DDQ}	Isolated Output Buffer Supply: +3.3V
NC	No Connect
GND _Q	Isolated Output Buffer Ground

TRUTH TABLE

OPERATION	ADDRESS												I/O
	USED	CE3	CE2	$\overline{CE3}$	$\overline{CE2}$	$\overline{OE}$	$\overline{ADSP}$	$\overline{ADSC}$	$\overline{ADV}$	$\overline{WRITE}$	$\overline{OE}$	CLK	
Deselected, Power-down	None	X	X	X	X	H	X	L	X	X	X	L-H	High-Z
Deselected, Power-down	None	L	X	X	X	L	L	X	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	L	X	X	L	L	X	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	X	H	X	L	L	X	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	X	X	H	L	L	X	X	X	X	L-H	High-Z
Deselected, Power-down	None	L	X	X	X	L	H	L	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	L	X	X	L	H	L	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	X	H	X	L	H	L	X	X	X	L-H	High-Z
Deselected, Power-down	None	X	X	X	H	L	H	L	X	X	X	L-H	High-Z
Read Cycle, Begin Burst	External	H	H	L	L	L	L	X	X	X	L	L-H	Dout
Read Cycle, Begin Burst	External	H	H	L	L	L	L	X	X	X	H	L-H	High-Z
Write Cycle, Begin Burst	External	H	H	L	L	L	H	L	X	L	X	L-H	Din
Read Cycle, Begin Burst	External	H	H	L	L	L	H	L	X	H	L	L-H	Dout
Read Cycle, Begin Burst	External	H	H	L	L	L	H	L	X	H	H	L-H	High-Z
Read Cycle, Continue Burst	Next	X	X	X	X	X	H	H	L	H	L	L-H	Dout
Read Cycle, Continue Burst	Next	X	X	X	X	X	H	H	L	H	H	L-H	High-Z
Read Cycle, Continue Burst	Next	X	X	X	X	H	X	H	L	H	L	L-H	Dout
Read Cycle, Continue Burst	Next	X	X	X	X	H	X	H	L	H	H	L-H	High-Z
Write Cycle, Continue Burst	Next	X	X	X	X	X	H	H	L	L	X	L-H	Din
Write Cycle, Continue Burst	Next	X	X	X	X	H	X	H	L	L	X	L-H	Din
Read Cycle, Suspend Burst	Current	X	X	X	X	X	H	H	H	H	L	L-H	Dout
Read Cycle, Suspend Burst	Current	X	X	X	X	X	H	H	H	H	H	L-H	High-Z
Read Cycle, Suspend Burst	Current	X	X	X	X	H	X	H	H	H	L	L-H	Dout
Read Cycle, Suspend Burst	Current	X	X	X	X	H	X	H	H	H	H	L-H	High-Z
Write Cycle, Suspend Burst	Current	X	X	X	X	X	H	H	H	L	X	L-H	Din
Write Cycle, Suspend Burst	Current	X	X	X	X	H	X	H	H	L	X	L-H	Din

Notes:

1. All inputs except $\overline{OE}$ must meet setup and hold times for the Low-to-High transition of clock (CLK).
2. Wait states are inserted by suspending burst.
3. X means don't care. $\overline{WRITE}=L$ means any one or more byte write enable signals ($\overline{BW1}$ - $\overline{BW8}$) and $\overline{BWE}$ are LOW or $\overline{GW}$ is LOW. $\overline{WRITE}=H$ means all byte write enable signals are HIGH.
4. For a Write operation following a Read operation, $\overline{OE}$ must be HIGH before the input data required setup time and held HIGH throughout the input data hold time.
5. $\overline{ADSP}$ LOW always initiates an internal READ at the Low-to-High edge of clock. A WRITE is performed by setting one or more byte write enable signals and $\overline{BWE}$ LOW or $\overline{GW}$ LOW for the subsequent L-H edge of clock.

IS61SP6464

ASYNCHRONOUS TRUTH TABLE

Operation	ZZ	$\overline{OE}$	I/O STATUS
Pipelined Read	L	L	Dout
Pipelined Read	L	H	High-Z
Write	L	L	High-Z
Write	L	H	Din
Deselect	L	X	High-Z
Sleep	H	X	High-Z


WRITE TRUTH TABLE

Operation	$\overline{GW}$	$\overline{BWE}$	$\overline{BW8}$	$\overline{BW7}$	$\overline{BW6}$	$\overline{BW5}$	$\overline{BW4}$	$\overline{BW3}$	$\overline{BW2}$	$\overline{BW1}$
Read	H	H	X	X	X	X	X	X	X	X
Read	H	L	H	H	H	H	H	H	H	H
Write all bytes	H	L	L	L	L	L	L	L	L	L
Write all bytes	L	X	X	X	X	X	X	X	X	X
Write Byte 1	H	L	H	H	H	H	H	H	H	L
Write Byte 2	H	L	H	H	H	H	H	H	L	H
Write Byte 3	H	L	H	H	H	H	H	L	H	H
Write Byte 4	H	L	H	H	H	H	L	H	H	H
Write Byte 5	H	L	H	H	H	L	H	H	H	H
Write Byte 6	H	L	H	H	L	H	H	H	H	H
Write Byte 7	H	L	H	L	H	H	H	H	H	H
Write Byte 8	H	L	L	H	H	H	H	H	H	H

INTERLEAVED BURST ADDRESS TABLE (MODE = V_{DD} or No Connect)

External Address A1 A0	1st Burst Address A1 A0	2nd Burst Address A1 A0	3rd Burst Address A1 A0
00	01	10	11
01	00	11	10
10	11	00	01
11	10	01	00

LINEAR BURST ADDRESS TABLE (MODE = GNDQ)

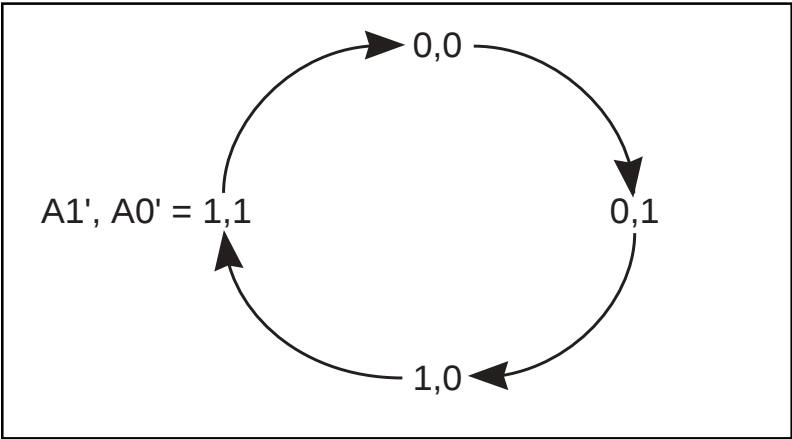

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Parameter	Value	Unit
P _D	Power Dissipation	1.0	W
I _{OUT}	Output Current (per I/O)	100	mA
V _{IN} , V _{OUT}	Voltage Relative to GND for I/O Pins	−0.5 to V _{DDQ} + 0.3	V
V _{IN}	Voltage Relative to GND for for Address and Control Inputs	−0.5 to 5.5	V
V _{DD}	Voltage on V _{DD} Supply Relative to GND	−0.5 to 4.6	V

Notes:

1. Stress greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields; however, precautions may be taken to avoid application of any voltage higher than maximum rated voltages to this high-impedance circuit.
3. This device contains circuitry that will ensure the output devices are in High-Z at power up.

OPERATING RANGE

Range	Ambient Temperature	V _{DD}
Commercial	0°C to +70°C	3.3V +10%, −5%
Industrial	−40°C to +85°C	3.3V +10%, −5%

IS61SP6464

DC ELECTRICAL CHARACTERISTICS⁽¹⁾ (Over Operating Range)

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
V _{OH}	Output HIGH Voltage	I _{OH} = -4.0 mA	2.4	—	V
V _{OL}	Output LOW Voltage	I _{OL} = 8 mA	—	0.4	V
V _{IH}	Input HIGH Voltage		2.0	V _{DDQ} + 0.3	V
V _{IL}	Input LOW Voltage		-0.3	0.8	V
I _{LI}	Input Leakage Current	GND ≤ V _{IN} ≤ V _{DDQ} ⁽²⁾	Com. Ind.	-2 10	μA
I _{LO}	Output Leakage Current	GND ≤ V _{OUT} ≤ V _{DDQ} , $\overline{OE} = V_{IH}$	Com. Ind.	-2 10	μA

CAPACITANCE^(1,2)

Symbol	Parameter	Conditions	Max.	Unit
C _{IN}	Input Capacitance	V _{IN} = 0V	5	pF
C _{OUT}	Input/Output Capacitance	V _{OUT} = 0V	7	pF

Notes:

1. Tested initially and after any design or process changes that may affect these parameters.
2. Test conditions: T_A = 25°C, f = 1 MHz, V_{DD} = 3.3V.

AC TEST CONDITIONS

Parameter	Unit
Input Pulse Level	0V to 3.0V
Input Rise and Fall Times	1.5 ns
Input and Output Timing and Reference Level	1.5V
Output Load	See Figures 1 and 2

AC TEST LOADS

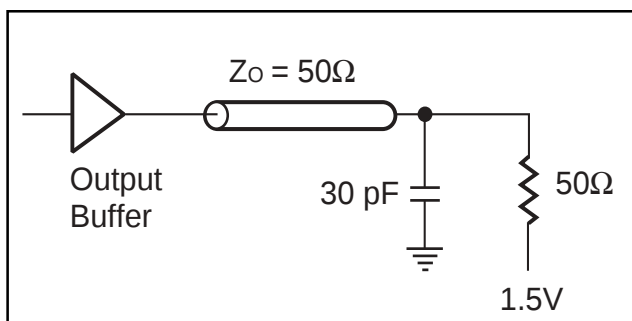


Figure 1

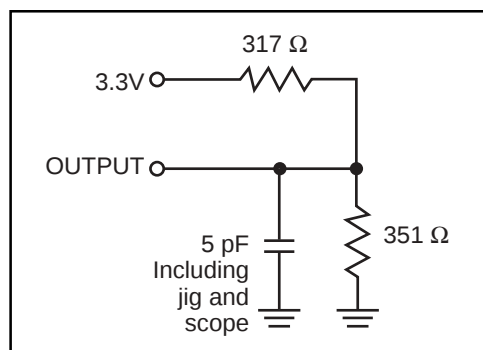


Figure 2

POWER SUPPLY CHARACTERISTICS (Over Operating Range)

Symbol	Parameter	Test Conditions		-117 Max.	-100 Max.	Unit
I _{CC}	AC Operating Supply Current	Device Selected, All Inputs = V _{IL} or V _{IH} OE = V _{IH} , Cycle Time ≥ t _{KC} min.	Com. Ind.	270 270	250 270	mA
I _{SB1}	Standby Current TTL Inputs	Device Deselected, V _{DD} = Max., All Inputs = V _{IH} or V _{IL} CLK Cycle Time ≥ t _{KC} min.	Com. Ind.	70 80	70 80	mA
I _{SB2}	Standby Current CMOS Inputs	Device Deselected, V _{DD} = Max., V _{IN} ≥ V _{DD} - 0.2V, or V _{IN} ≤ 0.2V CLK Cycle Time ≥ t _{KC} min.	Com. Ind.	20 30	20 30	mA
I _{ZZ}	Power-Down Mode Current	ZZ = V _{DDQ} , CLK Running All Inputs ≤ GND + 0.2V or ≥ V _{DD} - 0.2V	Com. Ind.	20 30	20 30	mA

Notes:

1. The MODE pin has an internal pullup. ZZ pin has an internal pull-down. This pin may be a No Connect, tied to GND, or tied to V_{DDQ}.
2. The MODE pin should be tied to V_{DD} or GND. It exhibits ±10 µA maximum leakage current when tied to ≤ GND + 0.2V or ≥ V_{DD} - 0.2V.

IS61SP6464


READ CYCLE SWITCHING CHARACTERISTICS (Over Operating Range)

Symbol	Parameter	-117 MHz		-100 MHz		Unit
		Min.	Max.	Min.	Max.	
t _{CC}	Cycle Time	9.2	—	10	—	ns
t _{KH}	Clock High Time	3.4	—	4	—	ns
t _{KL}	Clock Low Time	3.4	—	4	—	ns
t _{KQ}	Clock Access Time	—	5	—	5	ns
t _{KQX} ⁽¹⁾	Clock High to Output Invalid	1.5	—	2.5	—	ns
t _{QLZ} ^(1,2)	Clock High to Output Low-Z	0	—	0	—	ns
t _{QHZ} ^(1,2)	Clock High to Output High-Z	2	5	2	5	ns
t _{OEQ}	Output Enable to Output Valid	—	5	—	5	ns
t _{OEQX} ⁽¹⁾	Output Disable to Output Invalid	0	—	0	—	ns
t _{ELZ} ^(1,2)	Output Enable to Output Low-Z	0	—	0	—	ns
t _{EHZ} ^(1,2)	Output Disable to Output High-Z	2	5	2	5	ns
t _{AS}	Address Setup Time	2.5	—	2.5	—	ns
t _{SS}	Address Status Setup Time	2.5	—	2.5	—	ns
t _{WS}	Write Setup Time	2.5	—	2.5	—	ns
t _{CES}	Chip Enable Setup Time	2.5	—	2.5	—	ns
t _{AVS}	Address Advance Setup Time	2.5	—	2.5	—	ns
t _{AH}	Address Hold Time	0.5	—	0.5	—	ns
t _{SH}	Address Status Hold Time	0.5	—	0.5	—	ns
t _{WH}	Write Hold Time	0.5	—	0.5	—	ns
t _{CEH}	Chip Enable Hold Time	0.5	—	0.5	—	ns
t _{AVH}	Address Advance Hold Time	0.5	—	0.5	—	ns

Notes:

1. Guaranteed but not 100% tested. This parameter is periodically sampled.
2. Tested with load in Figure 2.


READ CYCLE TIMING

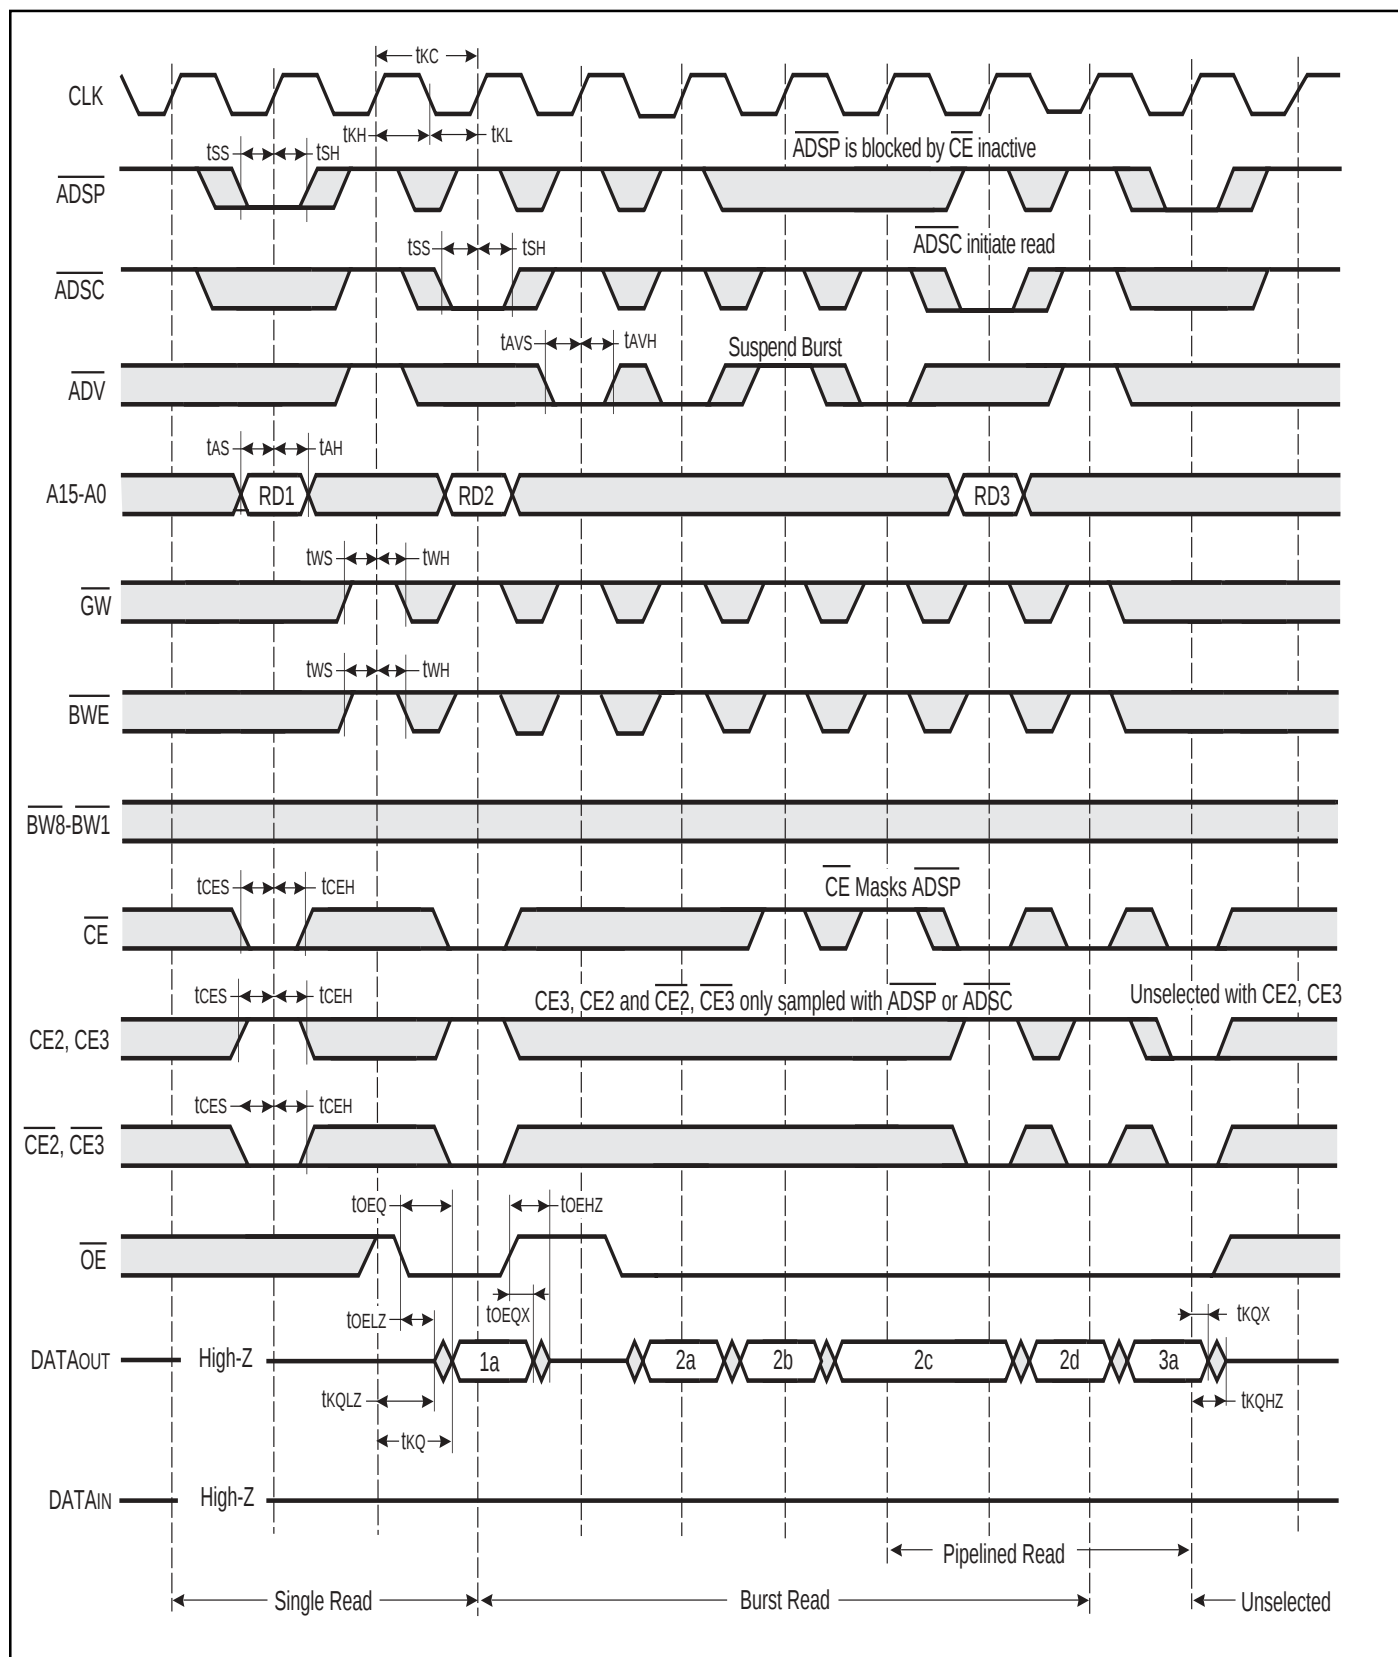

IS61SP6464**WRITE CYCLE SWITCHING CHARACTERISTICS** (Over Operating Range)

Symbol	Parameter	-117MHz		-100 MHz		Unit
		Min.	Max.	Min.	Max.	
t _{CC}	Cycle Time	9.2	—	10	—	ns
t _{KH}	Clock High Time	3.4	—	4	—	ns
t _{KL}	Clock Low Time	3.4	—	4	—	ns
t _{AS}	Address Setup Time	2.5	—	2.5	—	ns
t _{SS}	Address Status Setup Time	2.5	—	2.5	—	ns
t _{WS}	Write Setup Time	2.5	—	2.5	—	ns
t _{DS}	Data In Setup Time	2.5	—	2.5	—	ns
t _{CES}	Chip Enable Setup Time	2.5	—	2.5	—	ns
t _{AVS}	Address Advance Setup Time	2.5	—	2.5	—	ns
t _{AH}	Address Hold Time	0.5	—	0.5	—	ns
t _{SH}	Address Status Hold Time	0.5	—	0.5	—	ns
t _{DH}	Data In Hold Time	0.5	—	0.5	—	ns
t _{WH}	Write Hold Time	0.5	—	0.5	—	ns
t _{CEH}	Chip Enable Hold Time	0.5	—	0.5	—	ns
t _{AVH}	Address Advance Hold Time	0.5	—	0.5	—	ns

WRITE CYCLE TIMING

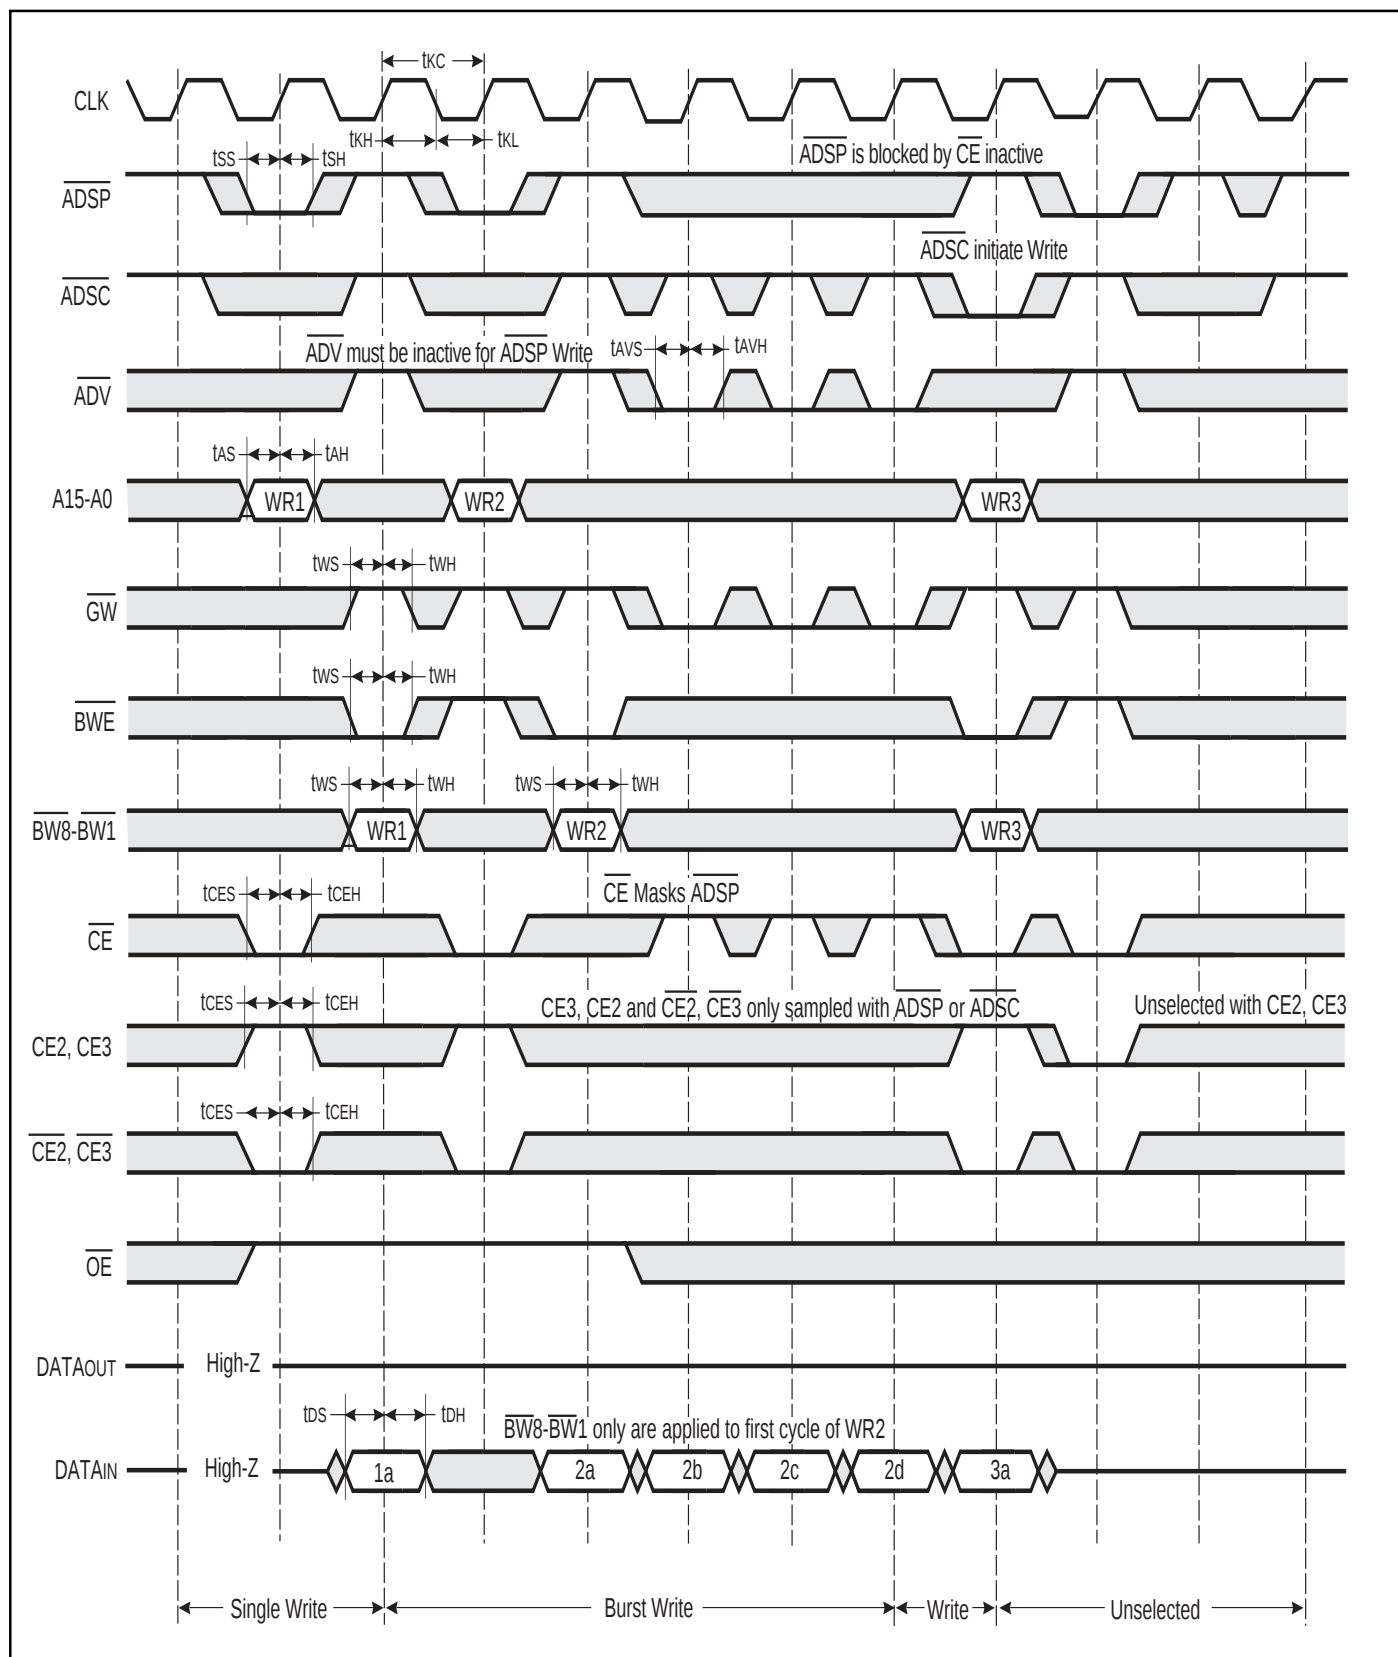

IS61SP6464


READ/WRITE CYCLE SWITCHING CHARACTERISTICS (Over Operating Range)

Symbol	Parameter	-117 MHz		-100 MHz		Unit
		Min.	Max.	Min.	Max.	
t _{CC}	Cycle Time	9.2	—	10	—	ns
t _{KH}	Clock High Time	3.4	—	4	—	ns
t _{KL}	Clock Low Time	3.4	—	4	—	ns
t _{KQ}	Clock Access Time	—	5	—	5	ns
t _{KQX} ⁽¹⁾	Clock High to Output Invalid	1.5	—	2.5	—	ns
t _{QLZ} ^(1,2)	Clock High to Output Low-Z	0	—	0	—	ns
t _{QHZ} ^(1,2)	Clock High to Output High-Z	2	5	2	5	ns
t _{OEQ}	Output Enable to Output Valid	—	5	—	5	ns
t _{OEQX} ⁽¹⁾	Output Disable to Output Invalid	0	—	0	—	ns
t _{ELZ} ^(1,2)	Output Enable to Output Low-Z	0	—	0	—	ns
t _{EHZ} ^(1,2)	Output Disable to Output High-Z	2	5	2	5	ns
t _{AS}	Address Setup Time	2.5	—	2.5	—	ns
t _{SS}	Address Status Setup Time	2.5	—	2.5	—	ns
t _{WS}	Write Setup Time	2.5	—	2.5	—	ns
t _{CES}	Chip Enable Setup Time	2.5	—	2.5	—	ns
t _{AH}	Address Hold Time	0.5	—	0.5	—	ns
t _{SH}	Address Status Hold Time	0.5	—	0.5	—	ns
t _{WH}	Write Hold Time	0.5	—	0.5	—	ns
t _{CEH}	Chip Enable Hold Time	0.5	—	0.5	—	ns

Note:

1. Guaranteed but not 100% tested. This parameter is periodically sampled.
2. Tested with load in Figure 2.

READ/WRITE CYCLE TIMING

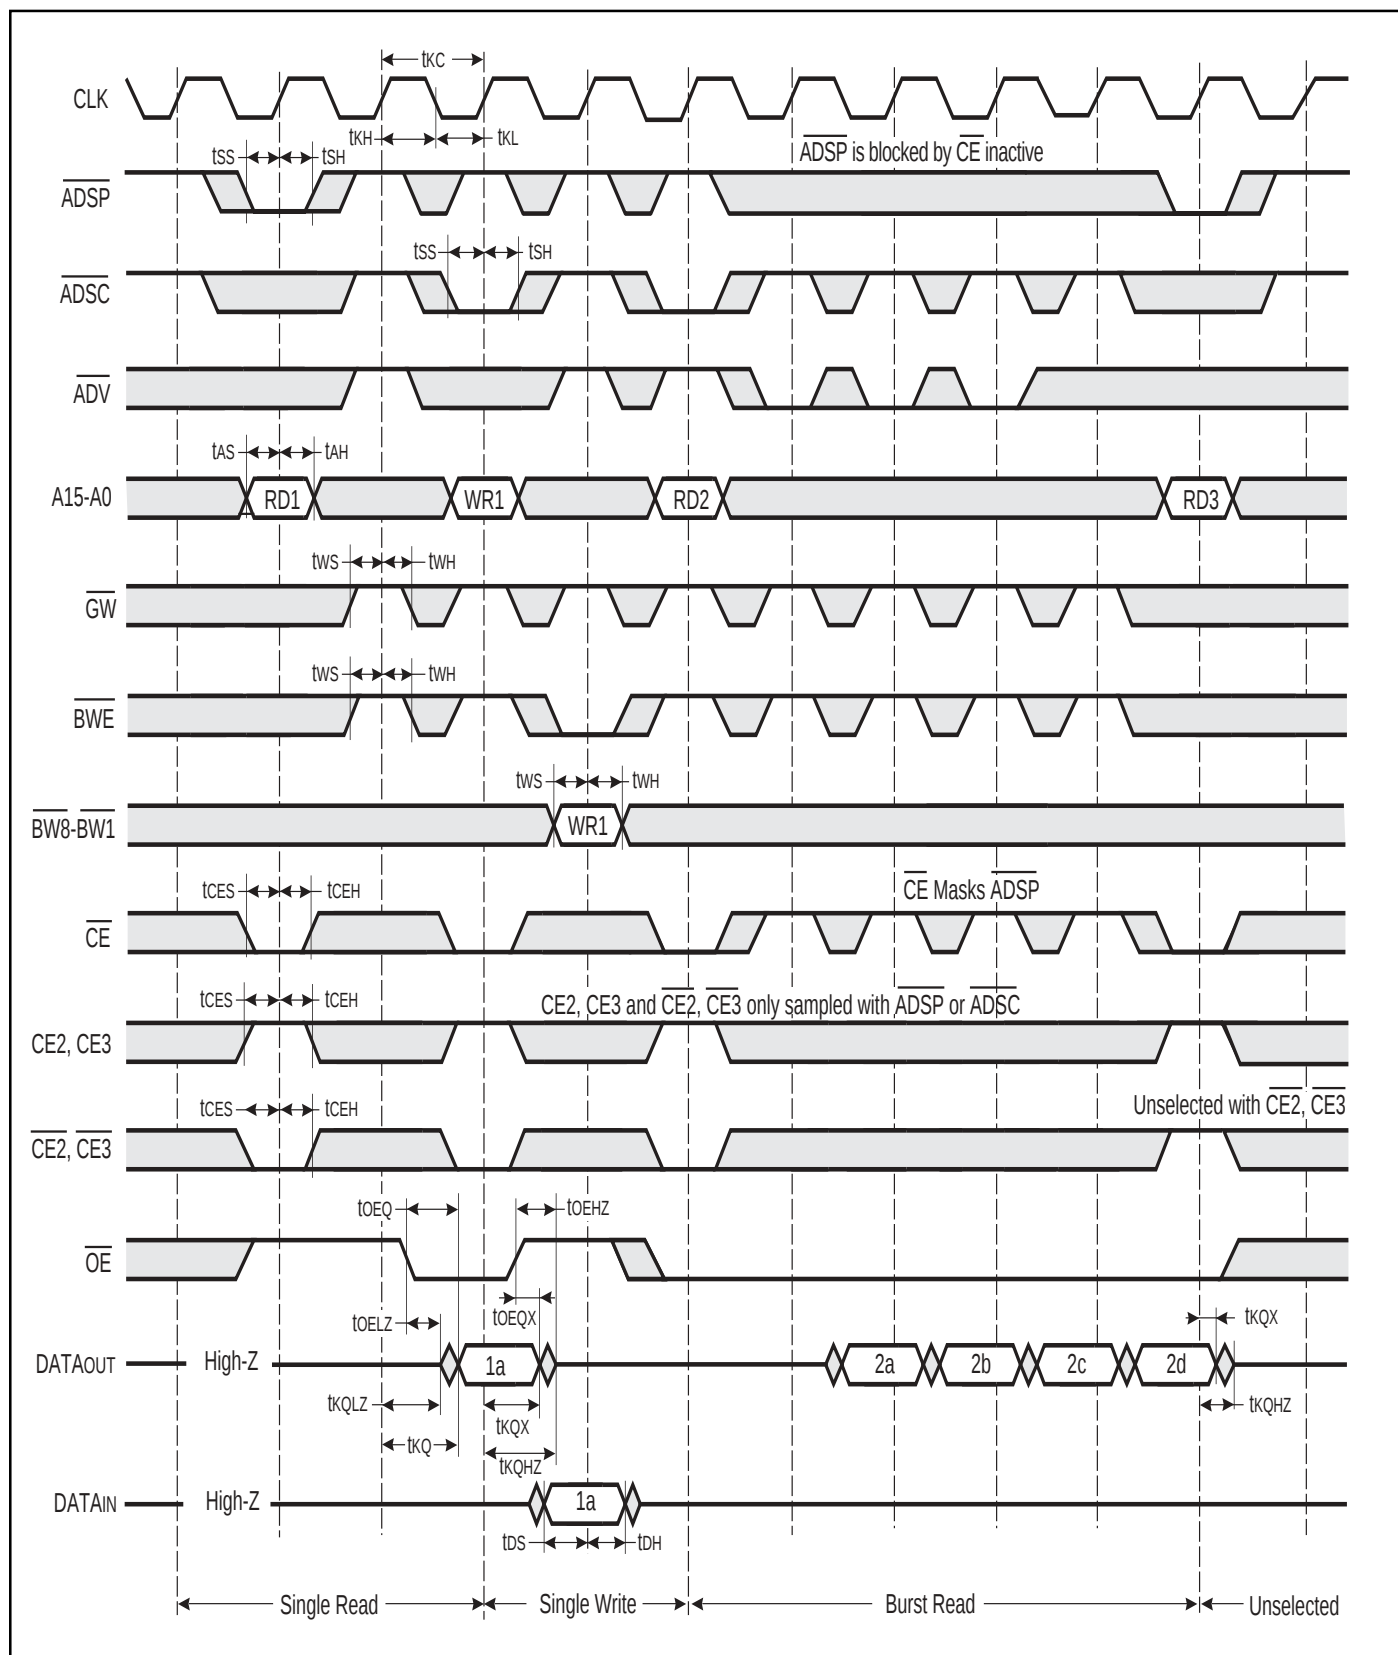

IS61SP6464


SNOOZE AND RECOVERY CYCLE SWITCHING CHARACTERISTICS (Over Operating Range)

Symbol	Parameter	-117 MHz		-100 MHz		Unit
		Min.	Max.	Min.	Max.	
t _{CC}	Cycle Time	9.2	—	10	—	ns
t _{KH}	Clock High Time	3.4	—	4	—	ns
t _{KL}	Clock Low Time	3.4	—	4	—	ns
t _{KQ}	Clock Access Time	—	5	—	5	ns
t _{KQX} ⁽³⁾	Clock High to Output Invalid	1.5	—	2.5	—	ns
t _{QLZ} ^(3,4)	Clock High to Output Low-Z	0	—	0	—	ns
t _{QHZ} ^(3,4)	Clock High to Output High-Z	2	5	2	5	ns
t _{OEQ}	Output Enable to Output Valid	—	5	—	5	ns
t _{OEQX} ⁽³⁾	Output Disable to Output Invalid	0	—	0	—	ns
t _{ELZ} ^(3,4)	Output Enable to Output Low-Z	0	—	0	—	ns
t _{EHZ} ^(3,4)	Output Disable to Output High-Z	2	5	2	5	ns
t _{AS}	Address Setup Time	2.5	—	2.5	—	ns
t _{SS}	Address Status Setup Time	2.5	—	2.5	—	ns
t _{CES}	Chip Enable Setup Time	2.5	—	2.5	—	ns
t _{AH}	Address Hold Time	0.5	—	0.5	—	ns
t _{SH}	Address Status Hold Time	0.5	—	0.5	—	ns
t _{CEH}	Chip Enable Hold Time	0.5	—	0.5	—	ns
t _{ZZS}	ZZ Standby ⁽¹⁾	2	—	2	—	cyc
t _{ZZREC}	ZZ Recovery ⁽²⁾	2	—	2	—	cyc

Notes:

1. The assertion of ZZ allows the SRAM to enter a lower power state than when deselected within the time specified. Data retention is guaranteed when ZZ is asserted and clock remains active.
2. $\overline{ADSC}$ and $\overline{ADSP}$ must not be asserted for at least 2 cyc after leaving ZZ state.
3. Guaranteed but not 100% tested. This parameter is periodically sampled.
4. Tested with load in Figure 2.

SNOOZE AND RECOVERY CYCLE TIMING

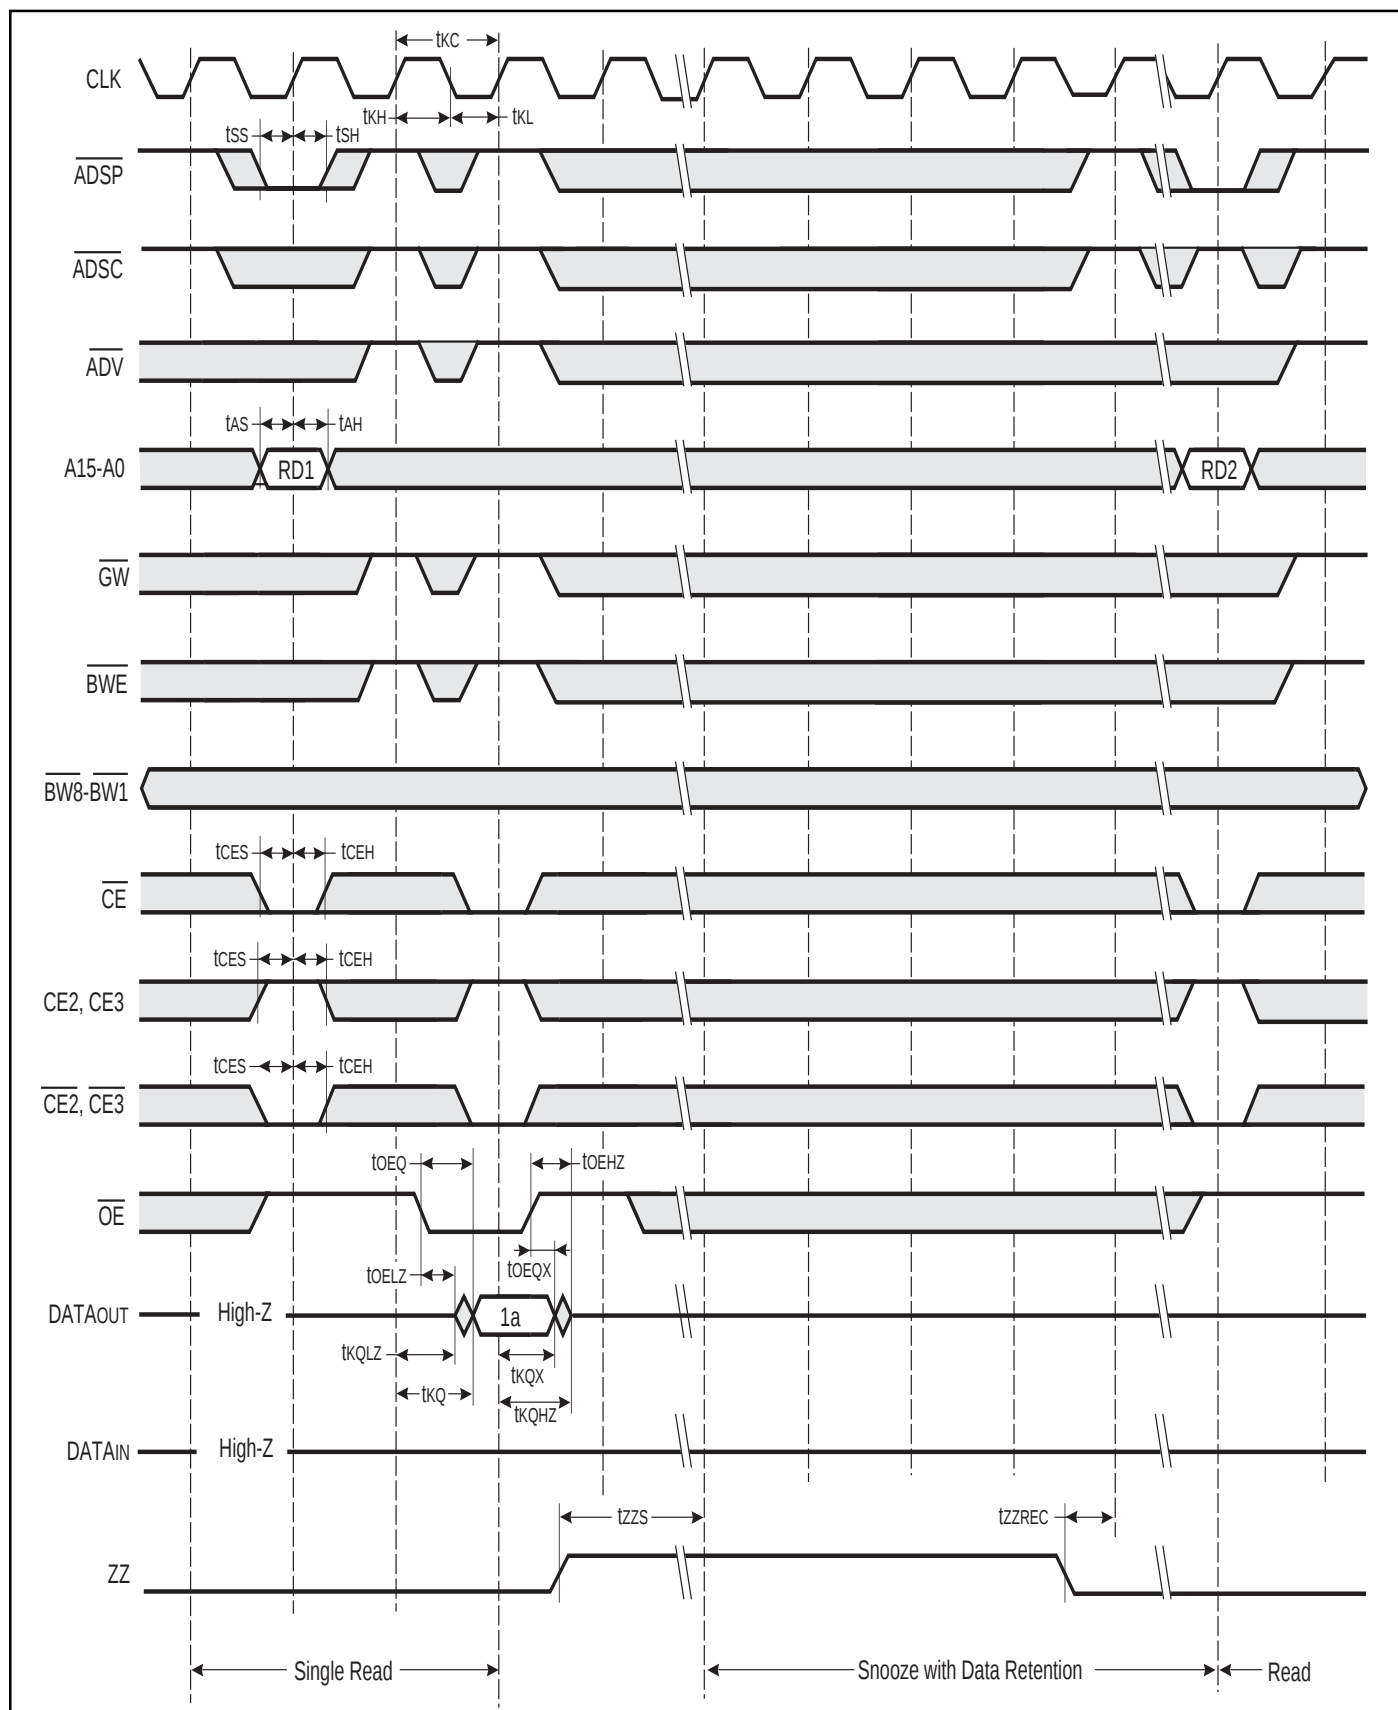

IS61SP6464

ORDERING INFORMATION

Commercial Range: 0°C to +70°C

Speed	Order Part Number	Package
117	IS61SP6464-117TQ	TQFP
100	IS61SP6464-100TQ	TQFP
	IS61SP6464-100PQ	PQFP

Industrial Range: –40°C to +85°C


Speed	Order Part Number	Package
100	IS61SP6464-100TQI	TQFP

PACKAGING INFORMATION

ISSI®

PQFP (Plastic Quad Flat Pack Package)

Package Code: PQ

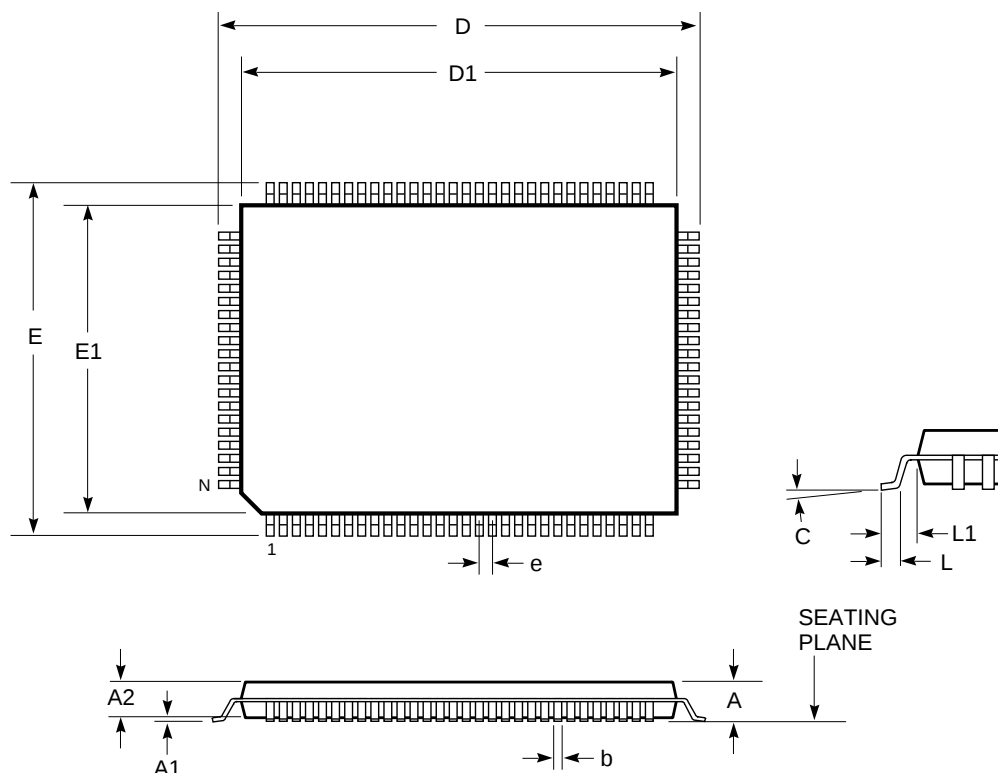

Plastic Quad Flat Pack (PQ)

Symbol	Millimeters		Inches			Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
Ref. Std.									
No. Leads (N)	100					128			
A	—	—	—	—		—	3.40	—	0.134
A1	0.25	—	0.010	—		0.15	0.35	0.008	0.014
A2	2.57	2.97	0.101	0.117		2.55	3.05	0.100	0.120
b	0.25	0.375	0.010	0.015		0.17	0.27	0.007	0.011
C	0.17	0.23	0.007	0.009		0.10	0.23	0.004	0.009
D	23.00	23.40	0.905	0.921		23.00	23.40	0.906	0.921
D1	19.90	20.10	0.783	0.791		19.90	20.10	0.783	0.791
E	17.00	17.40	0.669	0.685		17.00	17.40	0.669	0.685
E1	13.90	14.10	0.547	0.555		13.90	14.10	0.547	0.555
e	0.65 BSC		0.026 BSC			0.50 BSC		0.020 BSC	
L	0.65	0.95	0.025	0.037		0.65	0.95	0.026	0.037
L1	1.60 Nom.		0.063 Nom.			1.60 Nom.		0.063 Nom.	


Notes:

1. All dimensioning and tolerancing conforms to ANSI Y14.5M-1982.
2. Dimensions D1 and E1 do not include mold protrusions. Allowable protrusion is 0.25 mm per side. D1 and E1 do include mold mismatch and are determined at datum plane -H-.
3. Controlling dimension: millimeters.

PACKAGING INFORMATION

TQFP (Thin Quad Flat Pack Package)

Package Code: TQ

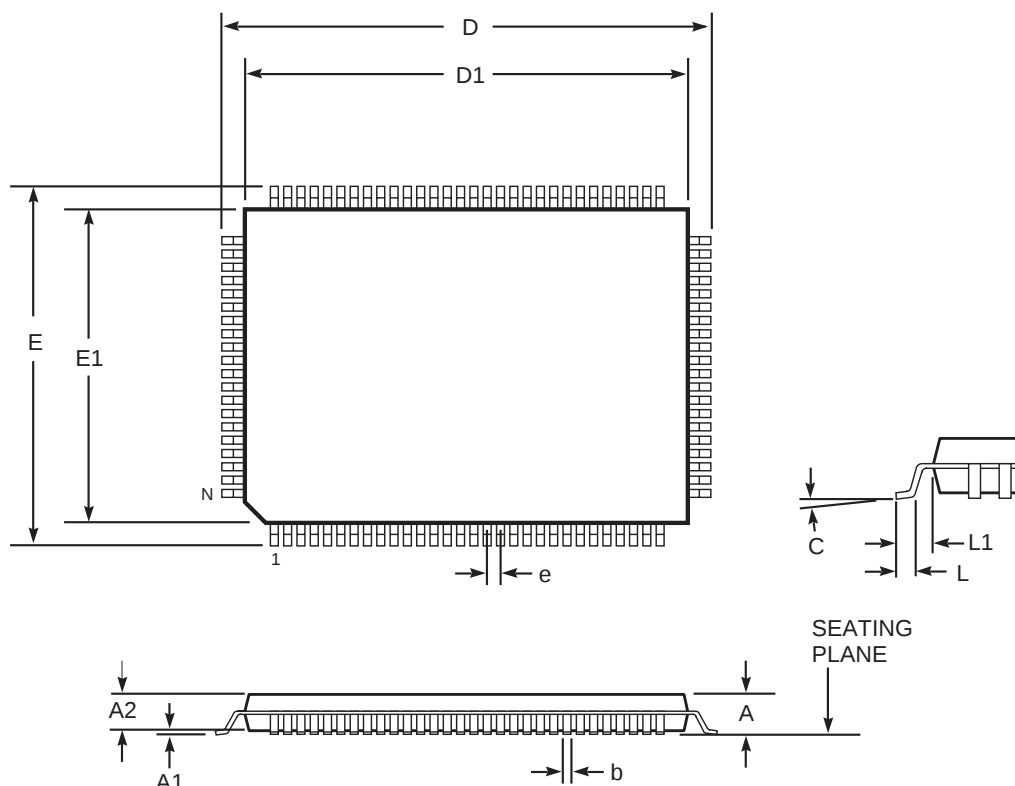

Thin Quad Flat Pack (TQ)

Symbol	Millimeters		Inches		Symbol	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
Ref. Std.									
No. Leads (N)	100					128			
A	—	1.60	—	0.063		—	1.60	—	0.063
A1	0.05	0.15	0.002	0.006		0.05	0.15	0.002	0.006
A2	1.35	1.45	0.053	0.057		1.35	1.45	0.053	0.057
b	0.22	0.38	0.009	0.015		0.17	0.27	0.007	0.011
D	21.90	22.10	0.862	0.870		21.80	22.20	0.858	0.874
D1	19.90	20.10	0.783	0.791		19.90	20.10	0.783	0.791
E	15.90	16.10	0.626	0.634		15.80	16.20	0.622	0.638
E1	13.90	14.10	0.547	0.555		13.90	14.10	0.547	0.555
e	0.65 BSC		0.026 BSC			0.50 BSC		0.020 BSC	
L	0.45	0.75	0.018	0.030		0.45	0.75	0.018	0.030
L1	1.00 REF.		0.039 REF.			1.00 REF.		0.039 REF.	
C	0°	7°	0°	7°		0°	7°	0°	7°

Notes:

1. All dimensioning and tolerancing conforms to ANSI Y14.5M-1982.
2. Dimensions D1 and E1 do not include mold protrusions. Allowable protrusion is 0.25 mm per side. D1 and E1 do include mold mismatch and are determined at datum plane -H-.
3. Controlling dimension: millimeters.