




REVISIONS

DOC. NO. SPC-F004 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1718	A	Released	JWM	9/30/04	SF	9/30/04	JC	10/1/04

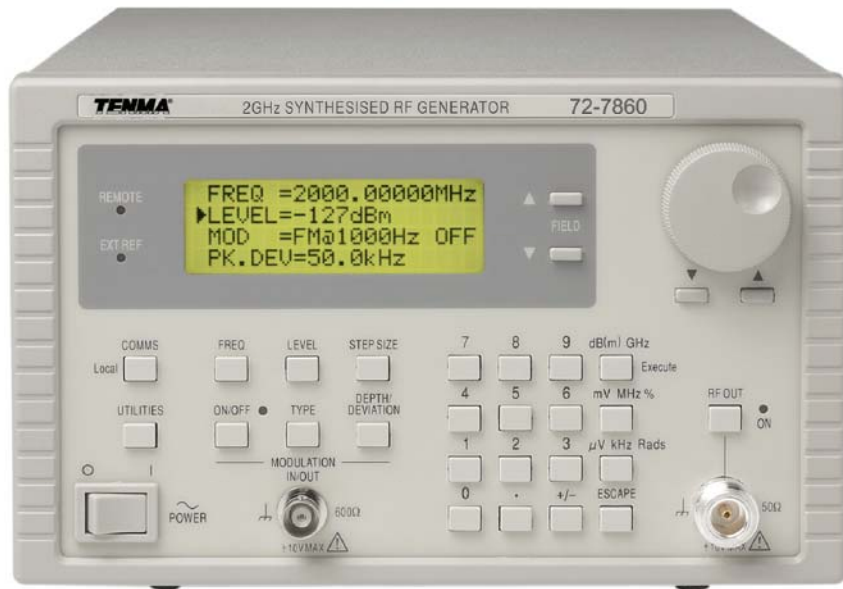

FEATURES

- Setability of 10Hz in up to 2GHz
- Accuracy better than 1 ppm over 15°C to 30°C
- Ageing better than 1 ppm over one year
- External frequency locking
- Low phase noise and low leakage
- Amplitude range of -127dBm to +7dBm
- Amplitude entry in dBm or μ V / mV
- Amplitude setability of 0.1dBm or 0.01 μ V
- FM, Phase and AM modulation
- Direct numeric entry or rotary control with user setable frequency/amplitude increments
- Non-volatile storage for 9 generator set-ups
- Full remote control via RS-232 or GPIB
- Unmatched price/performance ratio

SPC-F004.DWG

TOLERANCES: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	Jeff McVicker	9/30/04	2GHz Synthesised RF Generator			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	Steve Feiwell	9/30/04	A	72-7860	01J2675.dwg	A
APPROVED BY:	DATE:	SCALE:	U.O.M.:	SHEET:		
John Cole	10/1/04	NTS	Millimeters	1 OF 3		

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY. DISCLAIMER: ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

FREQUENCY

Frequency Range: 150kHz to 2000MHz

Setting Resolution: 10Hz by direct keyboard entry, or in user-set increments of 10Hz to 999-999999MHz.

Display Resolution: 10Hz.

Frequency Accuracy: See Frequency Reference specifications.

Phase Noise: -116dBc/Hz at 25kHz offset, 500MHz carrier.

Residual FM:(FM Off) Equivalent peak deviation in a 300Hz to 3.4kHz bandwidth: 12Hz at 500MHz carrier.

REFERENCE FREQUENCY

Options: Internal or External (via rear panel BNC).

Internal Accuracy: $< \pm 1$ ppm over temperature range 15°C to 30°C

($< \pm 2$ ppm over temperature range 5°C to 40°C).

Internal Stability: $< \pm 1$ ppm per year.

Internal Ref. Out: 10MHz from 50Ω amplitude 2V pk-pk into 50Ω

External Ref In: 10MHz into 50Ω amplitude 2V pk-pk to 5V pk-pk.

OUTPUT LEVEL

Output Level Range: -127dBm to +7dBm (0.1μV to 500mV into 50Ω),

-127dBm to +1dBm in AM mode.

Setting Resolution: 0.1dB (or 0.01μV to 1mV) by direct keyboard entry, or

in user-set increments of 0.1dB to 100dB (or 0.01μV to 100mV).

Accuracy: Better than ± 2 dBm.

Harmonics: < -25 dBc @ +7dBm.

Sub-Harmonics: < 1000 MHz - None; > 1000 MHz - < -25 dBc at +7dBm.

Non-Harmonic Spurious: < -60 dBc at ≥ 62.5 MHz, < -50 dBc at < 62.5 MHz,

Carrier Leakage: < 0.5 μV generated into a 50Ω load by a 2 turn 25mm loop, at a distance of 25mm from the generator with the output set to < -10 dBm into a 50Ω sealed load.

Output Type: Output impedance 50Ω Type N connector.

Reverse Protection: 50VDC, up to 25W from 50Ω source, LED indication.

Output Switch: RF OUT on-off switch with LED showing ON status.

MODULATION

Modulation Source

Type: Internal from built-in sine wave generator, or external from front panel BNC.

Internal: 400Hz or 1kHz sine, signal also available as an output.

External: Calibrated for 1V rms sine, input impedance 600Ω

Frequency Modulation

Max Peak Deviation: See Table.

Setting Resolution: 0.5 kHz.

Deviation Accuracy: $< \pm 10\%$ ± 0.5 kHz for 1kHz Internal

or 1kHz / 1Vrms External Modulation.

External Modulation: 100Hz - 300kHz (± 2 dB relative to 1kHz).

Distortion: $< 2\%$ @ 1kHz modulation, max. deviation (300-3.4kHz bandwidth).

Phase Modulation

Max Peak Deviation: See Table.

Setting Resolution: 0.05 rads for < 10.0 rads deviation,

0.1 rads for ≥ 10.0 rads deviation.

Deviation Accuracy: $< \pm 10\%$ ± 0.05 rads for 1kHz Internal

or 1kHz / 1Vrms External Modulation.

External Modulation: 100Hz - 10kHz (± 2 dB relative to 1kHz).

Distortion: $< 2\%$ @ 1kHz modulation, max. deviation

(300-3.4kHz bandwidth).

Max. Peak Deviation versus Carrier Frequency

	Frequency Mod.	Phase Modulation
1000MHz - 2000MHz	800kHz	80.0 rads
500MHz - 1000MHz	400kHz	40.0 rads
250MHz - 500MHz	200kHz	20.0 rads
125MHz - 250MHz	100kHz	10.0 rads
62.5MHz - 125MHz	50kHz	5.0 rads
150kHz - 62.5MHz	100kHz	10.0 rads

Amplitude Modulation

Max Mod. Depth: 100%, useability decreasing to 90% at 2GHz.

Setting Resolution: 0.5%.

Deviation Accuracy: $\pm(5\%$ setting $+1\%)$ for 1kHz Internal or 1kHz / 1Vrms External Modulation, $<70\%$ depth.

External Modulation: 50Hz - 200kHz (± 1 dB relative to 1kHz).

Distortion: 150kHz to 1GHz - $\leq 3\%$ @ 30%, $\leq 5\%$ @ 70%

1GHz to 2GHz - $\leq 5\%$ @ 30%, $\leq 10\%$ @ 70%

@ 1kHz modulation, max. deviation (300-3.4kHz bandwidth).

BUS INTERFACES

Full remote control facilities are available through both RS232 and GPIB interfaces

RS232: Variable Baud rate, 19200 Baud maximum, 9-pin D-connector.

GPIB (IEEE-488): Conforming with IEEE488-1 and IEEE488-2.

GENERAL SPECIFICATIONS

General

Display: 20 character x 4 row backlit alphanumeric LCD

Data Entry: Keyboard selection of frequency, amplitude, etc. ;
value entry direct by numeric keys or by rotary control.

Stored Settings: Up to 9 complete instrument set-ups may be stored
and recalled from battery-backed memory.

Mechanical

Size: 130mm (3U) H; 212mm (half-rack) W; 330mm D.

Weight: 4.6 kg. (10 lb)

Power Requirements

100V or 110V - 120V or 220V - 240V, all $\pm 10\%$ 50/60Hz,
adjustable internally; 30VA max. Installation Category II.

Temperature & Environmental

Operating Range: $+5^{\circ}\text{C}$ to 40°C , 20-80% RH.

Storage Range: -20°C to $+60^{\circ}\text{C}$.

Environmental: Indoor use at altitudes up to 2000m,
Pollution Degree 2.

Safety & EMC

Safety: Complies with EN61010-1.

EMC: Complies with EN61326.