

# 2SK727-01

## FUJI POWER MOS-FET

### N-CHANNEL SILICON POWER MOS-FET

## F-I SERIES


#### Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- High voltage
- Avalanche-proof

#### Applications

- Switching regulators
- UPS
- DC-DC converters
- General purpose power amplifier

#### Outline Drawings

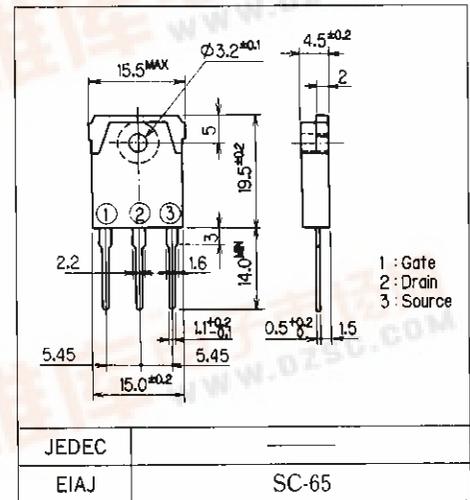


#### Max. Ratings and Characteristics

##### Absolute Maximum Ratings(Tc=25°C)

Items	Symbols	Ratings	Units
Drain-source voltage	$V_{DSS}$	900	V
Continuous drain current	$I_D$	5	A
Pulsed drain current	$I_{D(puls)}$	20	A
Continuous reverse drain current	$I_{DR}$	5	A
Gate-source peak voltage	$V_{GSS}$	$\pm 20$	V
Max. power dissipation	$P_D$	125	W
Operating and storage temperature range	$T_{ch}$	150	$^{\circ}C$
	$T_{stg}$	-55 ~ +150	$^{\circ}C$

#### Equivalent Circuit Schematic

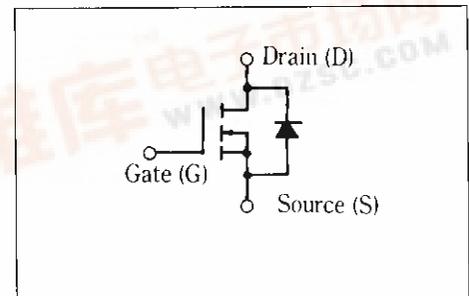

##### Electrical Characteristics(Tc=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	$V_{(BR)DSS}$	$I_D = 1mA$ $V_{GS} = 0V$	900			V
Gate threshold voltage	$V_{GS(th)}$	$I_D = 10mA$ $V_{DS} = V_{GS}$	2.1	3.0	4.0	V
Zero gate voltage drain current	$I_{DSS}$	$V_{DS} = 900V$ $V_{GS} = 0V$ $T_{ch} = 25^{\circ}C$		10	500	$\mu A$
Gate-source leakage current	$I_{GSS}$	$V_{GS} = \pm 20V$ $V_{DS} = 0V$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D = 2.5A$ $V_{GS} = 10V$		2.0	2.5	$\Omega$
Forward transconductance	$g_{fs}$	$I_D = 2.5A$ $V_{DS} = 25V$	3.0	6.0		S
Input capacitance	$C_{iss}$	$V_{DS} = 25V$		1500	2400	pF
Output capacitance	$C_{oss}$	$V_{GS} = 0V$		150	240	
Reverse transfer capacitance	$C_{rss}$	$f = 1MHz$		50	80	
Switching time ( $t_{off} = t_{d(off)} + t_r$ )	$t_{on}$	$V_{CC} = 30V$ $R_G = 50\Omega$		110	170	ns
	$t_{d(off)}$	$I_D = 2.4A$		300	450	
	$t_r$	$V_{GS} = 10V$		120	180	
Diode forward on-voltage	$V_{SD}$	$I_F = 2 \times I_{DR}$ $V_{GS} = 0V$ $T_{ch} = 25^{\circ}C$		1.0	1.5	V
Reverse recovery time	$t_{rr}$	$I_F = I_{DR}$ $d_i/d_t = 100A/\mu s$ $T_{ch} = 25^{\circ}C$		900		ns

##### Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(ch-a)}$	channel to air			35	$^{\circ}C/W$
	$R_{th(ch-c)}$	channel to case			1.0	$^{\circ}C/W$

