

1.5 AMP POSITIVE ADJUSTABLE VOLTAGE REGULATOR APPROVED TO DESC DRAWING 7703405



**Three Terminal, Precision Adjustable
Positive Voltage Regulator In Hermetic
Style Packages (LM117A)**

FEATURES

- Similar To Industry Standard LM117A
- Approved To DESC Standardized Military Drawing Number 7703405
- Built In Thermal Overload Protection
- Short Circuit Current Limiting
- Available In Six Package Styles
- Maximum Output Voltage Tolerance Is Guaranteed to $\pm 1\%$

DESCRIPTION

These three terminal positive regulators are supplied in hermetically sealed packages. All protective features are designed into the circuit, including thermal shutdown, current-limiting, and safe-area control. With heat sinking, these devices can deliver up to 1.5 amps of output current. The LCC-20 device is limited to .5 amps. The unit also features output voltages that can be fixed from 1.2 volts to 37 volts using external resistors.

ABSOLUTE MAXIMUM RATINGS $T_c @ 25^\circ C$

Power Dissipation

Case 2	1.1 W
Case-All Others	20 W

Input - Output Voltage Differential 40 V

Operating Junction Temperature Range - 55°C to + 150°C

Storage Temperature Range - 65°C to + 150°C

Lead Temperature (Soldering 10 seconds) 300°C

Thermal Resistance, Junction to Case:

Case 2, LCC-20	17°C/W
Case U & M, TO-257 (Isol) and SMD-3	4.2°C/W
Case T&N, TO-257 (Non-Isol) and SMD-1	3.5°C/W
Case Y, TO-3	3.0°C/W

Maximum Output Current:

Case 25 A
Case-All Others	1.5A

Recommended Operating Conditions:

Output Voltage Range	1.2 to 37 VDC
Ambient Operating Temperature Range (T_A)	- 55°C to + 125°C
Input Voltage Range	4.25 to 41.25 VDC



OM1324NTM, OM1324STM, OM1324NKM, OM1324SMM, OM1324NMM, OM1324N2M

ELECTRICAL CHARACTERISTICS -55°C T_A 125°C, $I_L = 8mA$ (unless otherwise specified)
OM1324NTM, OM1324STM, OM1324NKM, OM1324SMM, OM1324NMM

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0V, T_A = 25^\circ C$	1.238	1.262	V
		$V_{DIFF} = 3.3V$	• 1.225	1.270	
		$V_{DIFF} = 40V$	• 1.225	1.270	
Line Regulation (Note 1)	R_{LINE}	$3.0V V_{DIFF} 40V, V_{out} = V_{ref}, T_A = 25^\circ C$	-4.5	4.5	mV
		$3.3V V_{DIFF} 40V, V_{out} = V_{ref}$	• -9	9	
Load Regulation (Note 1)	R_{LOAD}	$V_{DIFF} = 3.0V, 10mA I_L 1.5A, T_A = 25^\circ C$	-15	15	mV
		$V_{DIFF} = 3.3V, 10mA I_L 1.5A$	• -15	15	
		$V_{DIFF} = 40V, 10mA I_L 300mA, T_A = 25^\circ C$	-15	15	
		$V_{DIFF} = 40V, 10mA I_L 195mA$	• -15	15	
Thermal Regulation	V_{RTH}	$V_{in} = 14.6V, I_L = 1.5A$ $P_d = 20 Watts, t = 20 ms, T_A = 25^\circ C$	-5	5	mV
Ripple Rejection (Note 2)	R_N	$f = 120 Hz, V_{out} = V_{ref}$ $C_{Adj} = 10 \mu F$	• 66		dB
Adjustment Pin Current	I_{Adj}	$V_{DIFF} = 3.0V, T_A = 25^\circ C$ $V_{DIFF} = 3.3V$ $V_{DIFF} = 40V$		100 100 100	μA
Adjustment Pin Current Change	I_{Adj}	$V_{DIFF} = 3.0V, 10mA I_L 1.5A, T_A = 25^\circ C$	-5	5	μA
		$V_{DIFF} = 3.3V, 10mA I_L 1.5A$	• -5	5	
		$V_{DIFF} = 40V, 10mA I_L 300mA, T_A = 25^\circ C$	-5	5	
		$V_{DIFF} = 40V, 10mA I_L 195mA$	• -5	5	
		$3.0V V_{DIFF} 40V, T_A = 25^\circ C$ $3.3V V_{DIFF} 40V$	• -5	5	
Minimum Load Current	I_{Lmin}	$V_{DIFF} = 3.0V, V_{OUT} = 1.4V (forced)$		5.0	mA
		$V_{DIFF} = 3.3V, V_{OUT} = 1.4V (forced)$	•	5.0	
		$V_{DIFF} = 40V, V_{OUT} = 1.4V (forced)$	•	5.0	
Current Limit (Note 2)	I_{CL}	$V_{DIFF} = 15V$	• 1.5	3.5	A
		$V_{DIFF} = 40V, T_A = 25^\circ C$	0.18	1.5	

Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.

PART NUMBER DESIGNATOR

Standard Military Drawing Number	Omnirel Part Number	Omnirel Package Designation
7703405M 7703405U 7703405T 7703405Y 7703405N 7703405Z	OM1324SMM OM1324STM OM1324NTM OM1324 NKM OM1324NMM OM1324N2M	SMD-3 TO-257 (Isolated) TO-257 (non-Isolated) TO-3 SMD-1 LCC-20

OM1324NTM, OM1324STM, OM1324NKM, OM1324SMM, OM1324NMM, OM1324N2M

ELECTRICAL CHARACTERISTICS -55°C T_A 125°C, $I_L = 8\text{mA}$ (unless otherwise specified)
OM1324N2M

Parameter	Symbol	Test Conditions	Min.	Max.	Unit
Reference Voltage	V_{REF}	$V_{DIFF} = 3.0\text{V}, T_A = 25^\circ\text{C}$	1.238	1.262	V
		$V_{DIFF} = 3.3\text{V}$	• 1.225	1.270	
		$V_{DIFF} = 40\text{V}$	• 1.225	1.270	
Line Regulation (Note 1)	R_{LINE}	$3.0\text{V } V_{DIFF} \text{ 40V, } V_{out} = V_{ref}, T_A = 25^\circ\text{C}$	-4.5	4.5	mV
		$3.3\text{V } V_{DIFF} \text{ 40V, } V_{out} = V_{ref}$	• -9	9	
Load Regulation (Note 1)	R_{LOAD}	$V_{DIFF} = 3.0\text{V}, 10\text{mA } I_L \text{ 500 mA, } T_A = 25^\circ\text{C}$	-15	15	mV
		$V_{DIFF} = 3.3\text{V}, 10\text{mA } I_L \text{ 500 mA}$	• -15	15	
		$V_{DIFF} = 40\text{V}, 10\text{mA } I_L \text{ 150 mA, } T_A = 25^\circ\text{C}$	-15	15	
		$V_{DIFF} = 40\text{V}, 10\text{mA } I_L \text{ 100 mA}$	• -15	15	
Thermal Regulation	V_{RTH}	$V_{in} = 14.6\text{V}, I_L = 300\text{ mA}$ $P_d = 4.0\text{ Watts, } t = 20\text{ ms, } T_A = 25^\circ\text{C}$	-2	2	mV
Ripple Rejection (Note 2)	R_N	$f = 120\text{ Hz, } V_{out} = V_{ref}$ $C_{Adj} = 10\text{ }\mu\text{F}$	• 66		dB
Adjustment Pin Current	I_{Adj}	$V_{DIFF} = 3.0\text{V}, T_A = 25^\circ\text{C}$ $V_{DIFF} = 3.3\text{V}$ $V_{DIFF} = 40\text{V}$		100 100 100	μA
Adjustment Pin Current Change	I_{Adj}	$V_{DIFF} = 3.0\text{V}, 10\text{mA } I_L \text{ 500 mA, } T_A = 25^\circ\text{C}$	-5	5	μA
		$V_{DIFF} = 3.3\text{V}, 10\text{mA } I_L \text{ 500 mA}$	• -5	5	
		$V_{DIFF} = 40\text{V}, 10\text{mA } I_L \text{ 150mA, } T_A = 25^\circ\text{C}$	-5	5	
		$V_{DIFF} = 40\text{V}, 10\text{mA } I_L \text{ 100mA}$	• -5	5	
		$3.0\text{V } V_{DIFF} \text{ 40V, } T_A = 25^\circ\text{C}$ $3.3\text{V } V_{DIFF} \text{ 40V}$	• -5	5	
Minimum Load Current	I_{Lmin}	$V_{DIFF} = 3.0\text{V, } V_{OUT} = 1.4\text{V (forced)}$		5.0	mA
		$V_{DIFF} = 3.3\text{V, } V_{OUT} = 1.4\text{V (forced)}$	•	5.0	
		$V_{DIFF} = 40\text{V, } V_{OUT} = 1.4\text{V (forced)}$	•	5.0	
Current Limit (Note 2)	I_{CL}	$V_{DIFF} = 15\text{V}$	• 0.5	1.65	A
		$V_{DIFF} = 40\text{V, } T_A = 25^\circ\text{C}$	0.15	0.65	

Notes:

1. Load and Line Regulation are specified at a constant junction temperature. Pulse testing with low duty cycle is used. Changes in output voltage due to heating effects must be taken into account separately.
2. If not tested, shall be guaranteed to the specified limits.
3. The • denotes the specifications which apply over the full operating temperature range.


APPLICATION

* C_{in} is required if regulator is located an appreciable distance from power supply filter.

** C_o is not needed for stability, however it does improve transient response.



$$V_{out} = 1.25\text{ V} \left(1 + \frac{R_2}{R_1} \right) + I_{Adj} R_2$$

Since I_{Adj} is controlled to less than 100 μA , the error associated with this term is negligible in most applications.

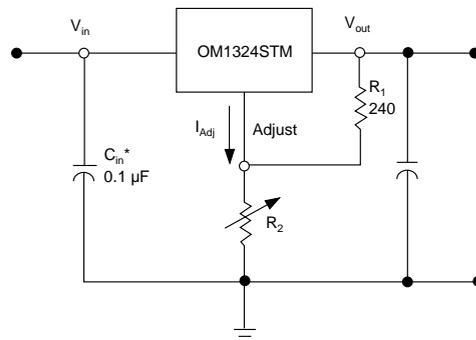

OM1324NTM, OM1324STM, OM1324NKM, OM1324SMM, OM1324NMM, OM1324N2M

MECHANICAL OUTLINE

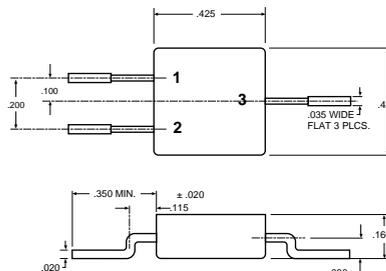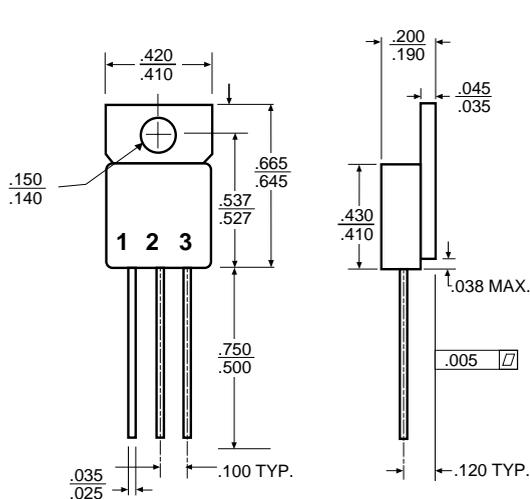

OM1324SMM


Front View
 Pin 1 - Adjust
 Pin 2 - Input
 Pin 3 - Output
 Case - Isolated

OM1324STM

Isolated
 Front View
 Pin 1 - Adjust
 Pin 2 - Output
 Pin 3 - Input
 Tab - Isolated



OM1324NTM

Non-Isolated
 Front View
 Pin 1 - Adjust
 Pin 2 - Output
 Pin 3 - Input
 Tab - Output

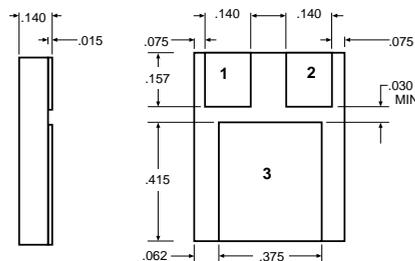

OM1324NMM

Pin 1 - Adjust
 Pin 2 - Input
 Pin 3 - Output

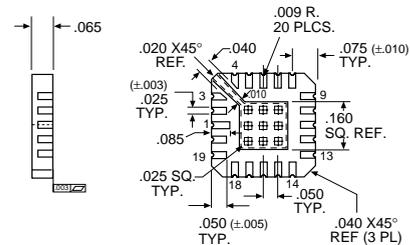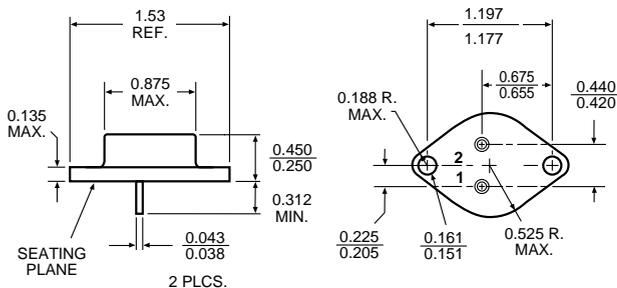

OM1324N2M

Pin 1	$V_{OUT}(\text{Sense})$	Pin 11	NC
Pin 2	NC	Pin 12	NC
Pin 3	NC	Pin 13	NC
Pin 4	NC	Pin 14	NC
Pin 5	V_{IN}	Pin 15	NC
Pin 6	NC	Pin 16	NC
Pin 7	NC	Pin 17	NC
Pin 8	NC	Pin 18	NC
Pin 9	NC	Pin 19	NC
Pin 10	ADJUST	Pin 20	V_{OUT}

OM1324NKM

Pin 1 - Adjust
 Pin 2 - Input
 Case - Output