

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC74HC279AP, TC74HC279AF

QUAD $\bar{S}$ - $\bar{R}$ LATCH

The TC74HC279A is a high speed CMOS QUAD S - R LATCH fabricated with silicon gate C²MOS technology.

It achieves the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

Each latch has an independent Q output and Set and Reset inputs. $\bar{S}$ and $\bar{R}$ are active low. When $\bar{S}$ input is low, the Q output goes high and when $\bar{R}$ input is low, the Q output goes low. When both $\bar{S}$ and $\bar{R}$ are low, $\bar{S}$ takes precedence resulting Q=low. When both of $\bar{S}$ and $\bar{R}$ are held high, Q output doesn't change.

All inputs are equipped with protection circuits against static discharge or transient excess voltage.

FEATURES:

- High Speed..... $t_{pd} = 12\text{ns}(\text{typ.})$ at $V_{CC} = 5\text{V}$
- Low Power Dissipation..... $I_{CC} = 2\mu\text{A}(\text{Max.})$ at $T_a = 25^\circ\text{C}$
- High Noise Immunity..... $V_{NIH} = V_{NIL} = 28\% V_{CC} (\text{Min.})$
- Symmetrical Output Impedance... $|I_{OH}| = I_{OL} = 4\text{mA}(\text{Min.})$
- Balanced Propagation Delays..... $t_{PLH} \approx t_{PHL}$
- Wide Operating Voltage Range.... $V_{CC} (\text{opr.}) = 2\text{V} \sim 6\text{V}$
- Pin and Function Compatible with 74LS279

TRUTH TABLE

INPUTS		OUTPUTS
S #	$\bar{R}$	Q
H	H	Q _n
L	H	H
H	L	L
L	L	H


NOTE:

Q_n -- The level of Q before the indicated input condition were established.


-- For latches with double $\bar{S}$ input.

H=Both $\bar{S}$ input high

L=One of both inputs low




P (DIP16-P-300-2.54A)
Weight : 1.00g (Typ.)




F (SOP16-P-300-1.27)
Weight : 0.18g (Typ.)

PIN ASSIGNMENT

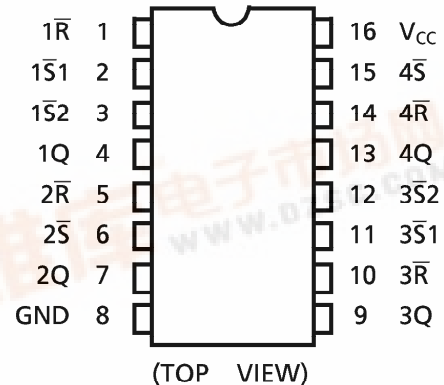

IEC LOGIC SYMBOL

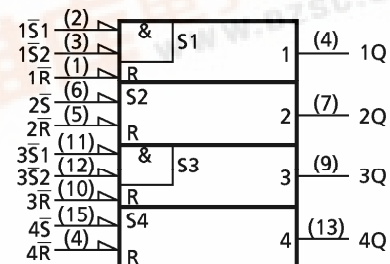

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	V_{CC}	$-0.5 \sim 7$	V
DC Input Voltage	V_{IN}	$-0.5 \sim V_{CC} + 0.5$	V
DC Output Voltage	V_{OUT}	$-0.5 \sim V_{CC} + 0.5$	V
Input Diode Current	I_{IK}	± 20	mA
Output Diode Current	I_{OK}	± 20	mA
DC Output Current	I_{OUT}	± 25	mA
DC V_{CC} /Ground Current	I_{CC}	± 50	mA
Power Dissipation	P_D	500 (DIP)* / 180 (SOP)	mW
Storage Temperature	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$

*500mW in the range of $T_a = -40^{\circ}\text{C} \sim 65^{\circ}\text{C}$. From $T_a = 65^{\circ}\text{C}$ to 85°C a derating factor of $-10\text{mW}/^{\circ}\text{C}$ shall be applied until 300mW.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	V_{CC}	$2 \sim 6$	V
Input Voltage	V_{IN}	$0 \sim V_{CC}$	V
Output Voltage	V_{OUT}	$0 \sim V_{CC}$	V
Operating Temperature	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Input Rise and Fall Time	t_r, t_f	$0 \sim 1000$ ($V_{CC} = 2.0\text{V}$) $0 \sim 500$ ($V_{CC} = 4.5\text{V}$) $0 \sim 400$ ($V_{CC} = 6.0\text{V}$)	ns

DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	V_{CC} (V)	$T_a = 25^{\circ}\text{C}$			$T_a = -40 \sim 85^{\circ}\text{C}$		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	
High - Level Input Voltage	V_{IH}		2.0 4.5 6.0	1.50 3.15 4.20	— — —	— — —	1.50 3.15 4.20	— — —	V
Low - Level Input Voltage	V_{IL}		2.0 4.5 6.0	— — —	— — —	0.50 1.35 1.80	— — —	0.50 1.35 1.80	V
High - Level Output Voltage	V_{OH}	$V_{IN} = V_{IH} \text{ or } V_{IL}$	$I_{OH} = -20\mu\text{A}$	2.0 4.5 6.0	1.9 4.4 5.9	2.0 4.5 6.0	— — —	1.9 4.4 5.9	V
			$I_{OH} = -4 \text{ mA}$	4.5 6.0	4.18 5.68	4.31 5.80	— —	4.13 5.63	
			$I_{OH} = -5.2 \text{ mA}$	6.0	5.68	5.80	—	5.63	
Low - Level Output Voltage	V_{OL}	$V_{IN} = V_{IH} \text{ or } V_{IL}$	$I_{OL} = 20\mu\text{A}$	2.0 4.5 6.0	— — —	0.0 0.0 0.0	0.1 0.1 0.1	— — —	V
			$I_{OL} = 4 \text{ mA}$	4.5 6.0	— —	0.17 0.18	0.26 0.26	— —	
			$I_{OL} = 5.2 \text{ mA}$	6.0	—	0.18	0.26	0.33 0.33	
Input Leakage Current	I_{IN}	$V_{IN} = V_{CC} \text{ or GND}$	6.0	—	—	± 0.1	—	± 1.0	μA
Quiescent Supply Current	I_{CC}	$V_{IN} = V_{CC} \text{ or GND}$	6.0	—	—	2.0	—	20.0	

961001EBA2'

- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

AC ELECTRICAL CHARACTERISTICS ($C_L = 15\text{pF}$, $V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$, Input $t_r = t_f = 6\text{ns}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Transition Time	t_{TLH} t_{THL}		—	4	8	ns
Propagation Delay Time ($\bar{S}1, \bar{S}2 - Q$)	t_{PLH} t_{PHL}		—	12	22	
Propagation Delay Time ($\bar{S} - Q$)	t_{PLH} t_{PHL}		—	9	17	
Propagation Delay Time ($\bar{R} - Q$)	t_{PLH} t_{PHL}		—	11	20	

AC ELECTRICAL CHARACTERISTICS ($C_L = 50\text{pF}$, Input $t_r = t_f = 6\text{ns}$)


PARAMETER	SYMBOL	TEST CONDITION	$T_a = 25^\circ\text{C}$			$T_a = -40 \sim 85^\circ\text{C}$		UNIT
			$V_{CC}(\text{V})$	MIN.	TYP.	MAX.	MIN.	MAX.
Output Transition Time	t_{TLH} t_{THL}		2.0	—	30	75	—	95
			4.5	—	8	15	—	19
			6.0	—	7	13	—	16
Propagation Delay Time ($\bar{S}1, \bar{S}2 - Q$)	t_{PLH} t_{PHL}		2.0	—	45	130	—	165
			4.5	—	15	26	—	33
			6.0	—	13	22	—	28
Propagation Delay Time ($\bar{S} - Q$)	t_{PLH} t_{PHL}		2.0	—	38	100	—	125
			4.5	—	12	20	—	25
			6.0	—	10	17	—	21
Propagation Delay Time ($\bar{R} - Q$)	t_{PLH} t_{PHL}		2.0	—	42	120	—	150
			4.5	—	14	24	—	30
			6.0	—	12	20	—	26
Input Capacitance	C_{IN}			—	5	10	—	10
Power Dissipation Capacitance	$C_{PD} (1)$			—	18	—	—	—

Note (1) C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.


Average operating current can be obtained by the equation :

$$I_{CC}(\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 4 \text{ (per circuit)}$$

SYSTEM DIAGRAM

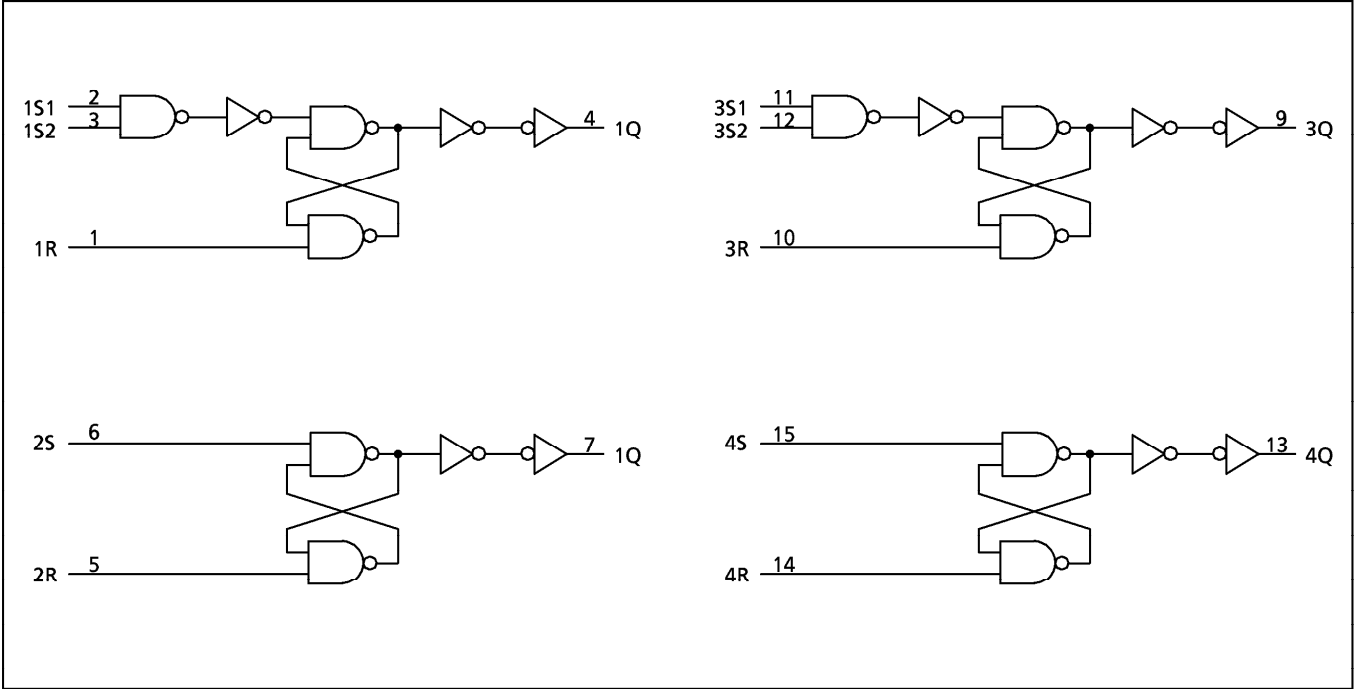

Unit in mm



Unit in mm

