

SPECIFICATION

Device Name : Power Integrated Module

Type Name : 7MBR20SA060A

Spec. No. : MS6M 0430

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.
Matsumoto Factory

		DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	
DRAWN	May-20-99	T. Saito			NO.	1 /
CHECKED	May-27-99	S. M. Saito				




Revised Records

[illegible]


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

7MBR20SA060A

1. Outline Drawing (Unit : mm)

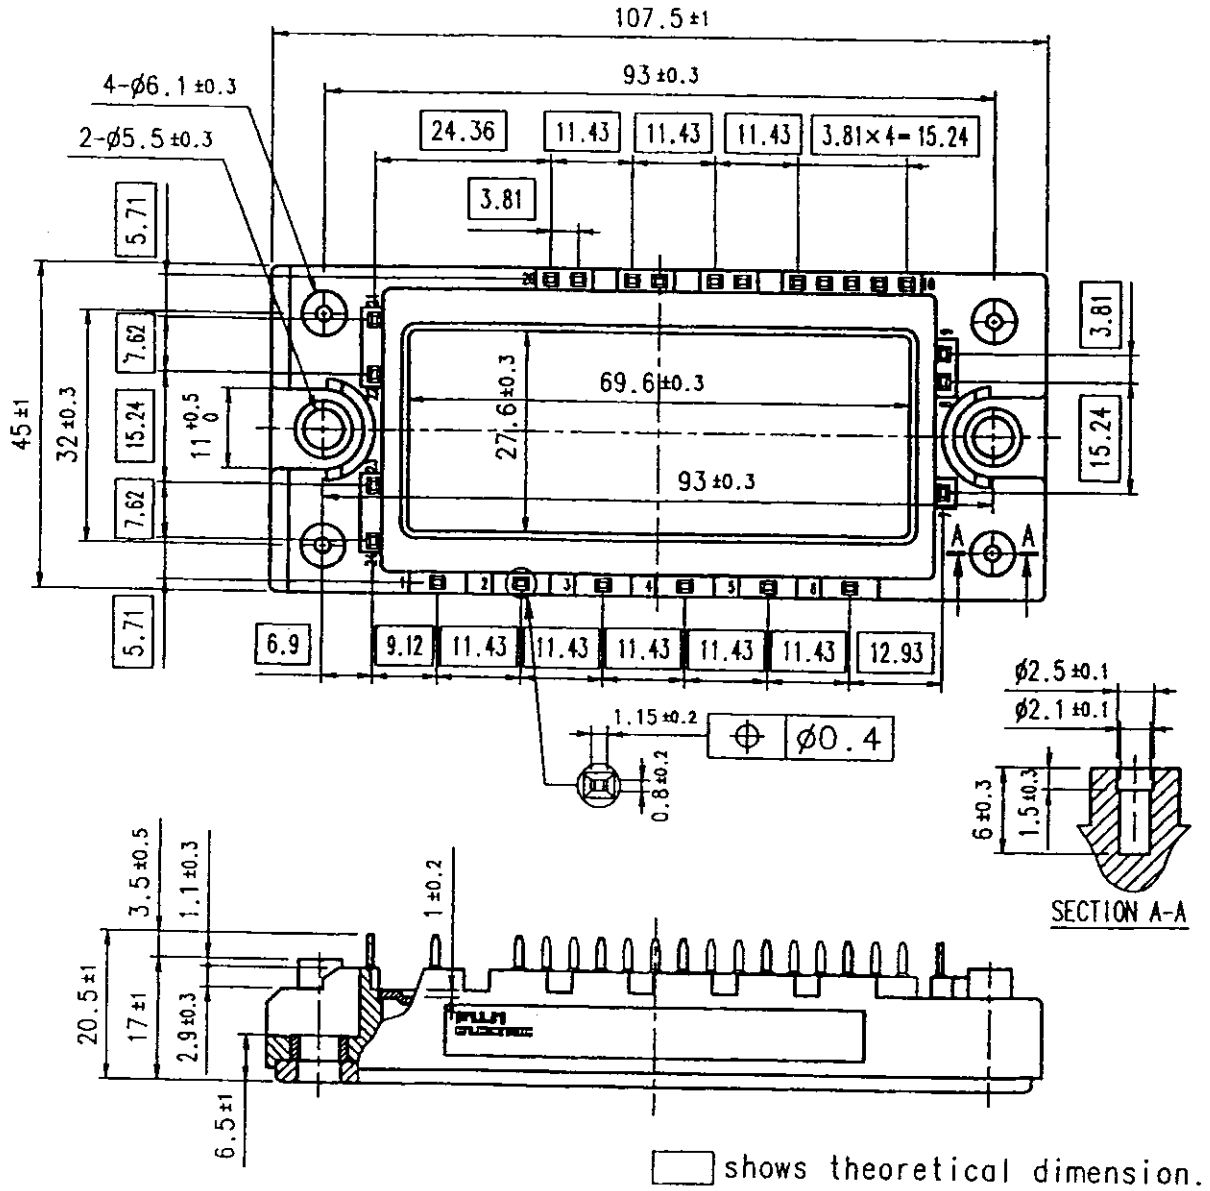

2. Equivalent circuit

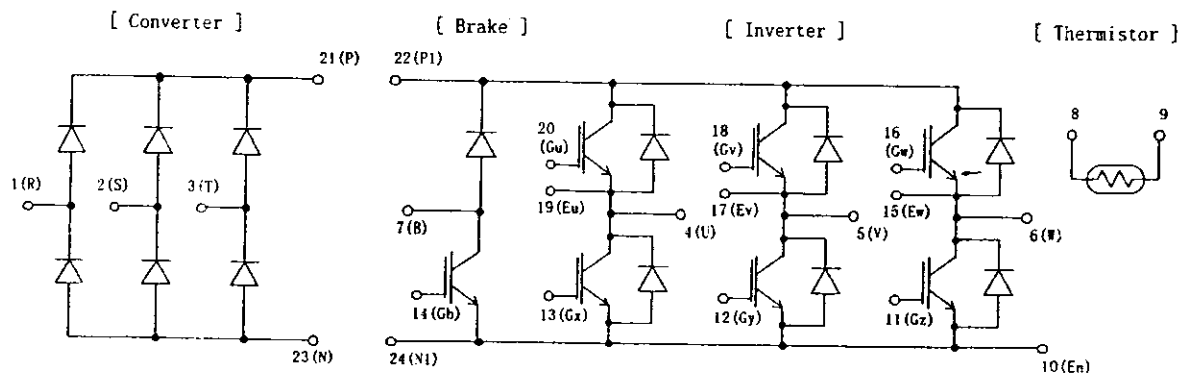

3. Absolute Maximum Ratings (at $T_c = 25^\circ\text{C}$ unless otherwise specified)

Items		Symbols	Conditions	Maximum Ratings	Units
Inverter	Collector-Emitter voltage	VCES		600	V
	Gate-Emitter voltage	VGES		± 20	V
	Collector current	I_c	Continuous	20	A
		I_{cp}	1ms	40	A
		$-I_c$		20	A
	Collector Power Dissipation	P_c	1 device	80	W
Brake	Collector-Emitter voltage	VCES		600	V
	Gate-Emitter voltage	VGES		± 20	V
	Collector current	I_c	Continuous	20	A
		I_{cp}	1ms	40	A
	Collector Power Dissipation	P_c	1 device	50	W
Converter	Repetitive peak reverse Voltage(Diode)	VRRM		600	V
	Repetitive peak reverse Voltage	VRRM		800	V
	Average Output Current	I_o	50Hz/60Hz sine wave	20	A
	Surge Current (Non-Repetitive)	IFSM	$T_j = 150^\circ\text{C}$, 10ms	210	A
	I^2t (Non-Repetitive)	I^2t	half sine wave	221	A^2s
Junction temperature		T_j		150	$^\circ\text{C}$
Storage temperature		T_{stg}		$-40 \sim +125$	$^\circ\text{C}$
Isolation voltage	between terminal and copper base (*1)	Viso	AC : 1min.	2500	V
	between thermistor and others (*2)			2500	V
Mounting Screw Torque (*3)				3.5	$\text{N} \cdot \text{m}$

(*1) All terminals should be connected together when isolation test will be done.

(*2) Terminal 8 and 9 should be connected together. Terminal 1 to 7 and 10 to 24 should be connected together and shorted to copper base.

(*3) Recommendable Value : $2.5 \sim 3.5 \text{ N} \cdot \text{m}$ (M5)

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

4. Electrical characteristics (at $T_j = 25^\circ\text{C}$ unless otherwise specified)


	Items	Symbols	Conditions	Characteristics			Units
				min.	typ.	Max.	
Inverter	Zero gate voltage Collector current	ICES	$V_{GE} = 0\text{ V}, V_{CE} = 600\text{ V}$			1.0	mA
	Gate-Emitter leakage current	IGES	$V_{CE} = 0\text{ V}, V_{GE} = \pm 20\text{ V}$			200	nA
	Gate-Emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = 20\text{ V}, I_c = 20\text{ mA}$	5.5	7.8	8.5	V
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	$V_{GE} = 15\text{ V},$ chip		1.8		V
			$I_c = 20\text{ A}$ terminal		1.95	2.4	
	Input capacitance	C_{ies}	$V_{GE} = 0\text{ V}, V_{CE} = 10\text{ V}$ $f = 1\text{ MHz}$		3000		pF
	Turn-on time	t_{on}	$V_{cc} = 300\text{ V}$		0.45	1.2	μs
		t_r	$I_c = 20\text{ A}$		0.25	0.6	
		$t_{r(l)}$	$V_{GE} = \pm 15\text{ V}$		0.08		
	Turn-off time	t_{off}	$R_G = 82\ \Omega$		0.40	1.0	
		t_f			0.05	0.35	
	Forward on voltage	VF	$I_F = 20\text{ A}$ chip		1.8		V
			terminal		1.95	2.6	
	Reverse recovery time	t_{rr}	$I_F = 20\text{ A}$			300	ns
Brake	Zero gate voltage Collector current	ICES	$V_{GE} = 0\text{ V}, V_{CE} = 600\text{ V}$			1.0	mA
	Gate-Emitter leakage current	IGES	$V_{CE} = 0\text{ V}, V_{GE} = \pm 20\text{ V}$			200	nA
	Collector-Emitter saturation voltage	$V_{CE(sat)}$	$V_{GE} = 15\text{ V},$ chip		1.8		V
			$I_c = 20\text{ A}$ terminal		1.95	2.4	
	Turn-on time	t_{on}	$V_{cc} = 300\text{ V}$		0.45	1.2	μs
		t_r	$I_c = 20\text{ A}$		0.25	0.6	
		t_{off}	$V_{GE} = \pm 15\text{ V}$		0.40	1.0	
		t_f	$R_G = 120\ \Omega$		0.05	0.35	
Converter	Reverse current	IRRM	$V_R = 600\text{ V}$			1.0	mA
	Forward on voltage	VFM	$I_F = 20\text{ A}$ chip		1.1		V
			terminal		1.2	1.5	
Thermistor	Reverse current	IRRM	$V_R = 800\text{ V}$			1.0	mA
	Resistance	R	$T = 25^\circ\text{C}$		5000		Ω
			$T = 100^\circ\text{C}$	465	495	520	
	B value	B	$T = 25/50^\circ\text{C}$	3305	3375	3450	K

5. Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Units
			min.	typ.	Max.	
Thermal resistance (1 device)	$R_{th(j-c)}$	Inverter IGBT			1.56	$^\circ\text{C/W}$
		Inverter FWD			3.00	
		Brake IGBT			2.50	
		Converter Diode			2.00	
Contact Thermal resistance	$R_{th(c-f)}$	with Thermal Compound (※)		0.05		$^\circ\text{C/W}$

※ This is the value which is defined mounting on the additional cooling fin with thermal compound.

6. Indication on module (モジュール表示)

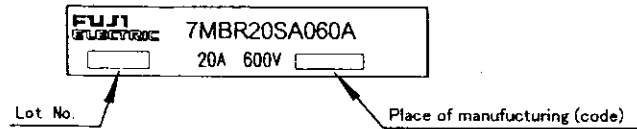


7. Applicable category (適用範囲)

This specification is applied to Power Integrated Module named 7MBR20SA060A.
 本納入仕様書は パワー集積モジュール 7MBR20SA060A に適用する。

8. Storage and transportation notes (保管・運搬上の注意事項)


- The module should be stored at a standard temperature of 5 to 35°C and humidity of 45 to 75%.
 常温・常湿保存が望ましい。(5~35°C, 45~75%)
- Store modules in a place with few temperature changes in order to avoid condensation on the module surface.
 急激な温度変化のなきこと。(モジュール表面が結露しないこと)
- Avoid exposure to corrosive gases and dust.
 腐蝕性ガスの発生場所、塵埃の多い場所は避けること。
- Avoid excessive external force on the module.
 製品に荷重がかからないように 十分注意すること。
- Store modules with unprocessed terminals.
 モジュールの端子は未加工の状態で保管すること。
- Do not drop or otherwise shock the modules when transporting.
 製品の運搬時に衝撃を与えたり、落下させたりしないこと。

9. Definitions of switching time (スイッチング時間の定義)

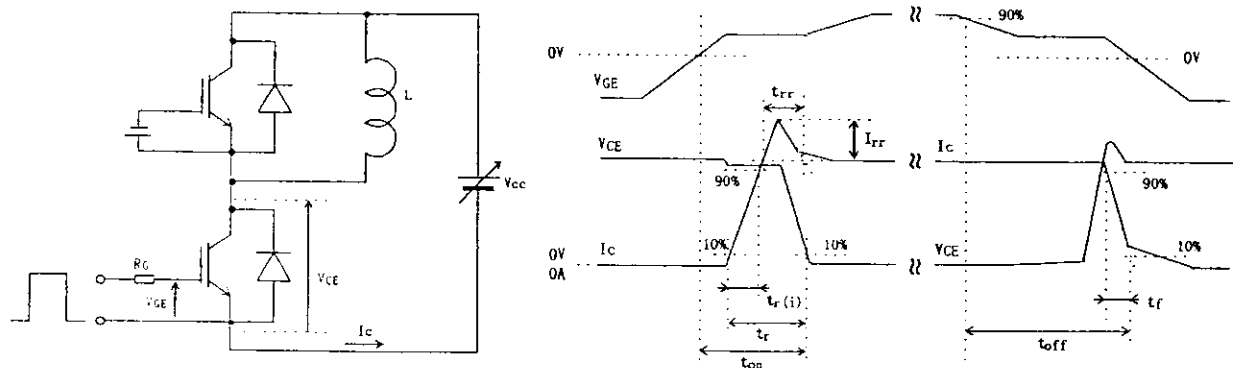


This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.


[Inverter]
Collector current vs. Collector-Emitter voltage
 $T_j = 25^\circ\text{C}$ (typ.)

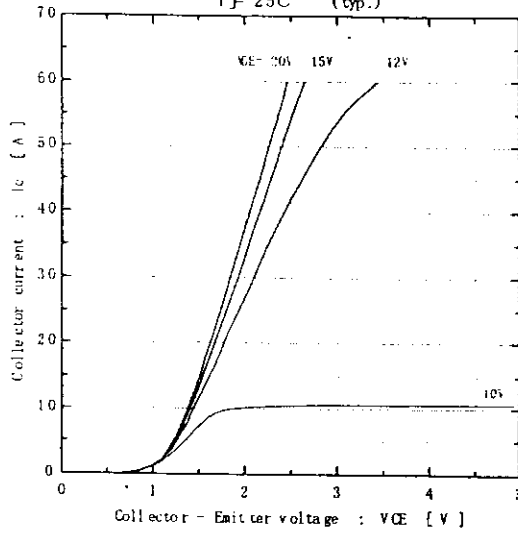


[Inverter]
Collector current vs. Collector-Emitter voltage
 $T_j = 125^\circ\text{C}$ (typ.)

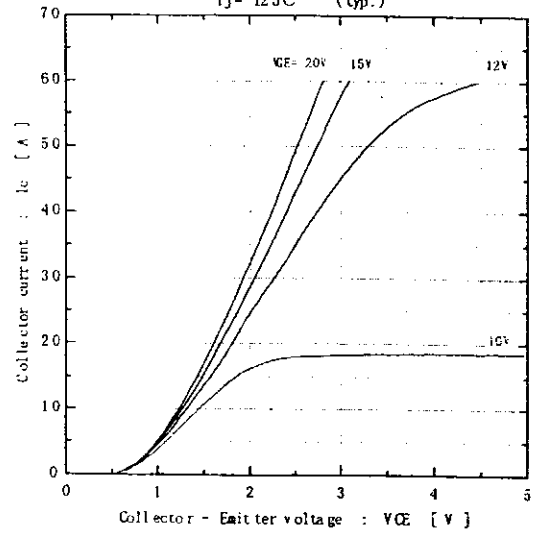


[Inverter]
Collector current vs. Collector-Emitter voltage
 $V_{GE} = 15\text{V}$ (typ.)

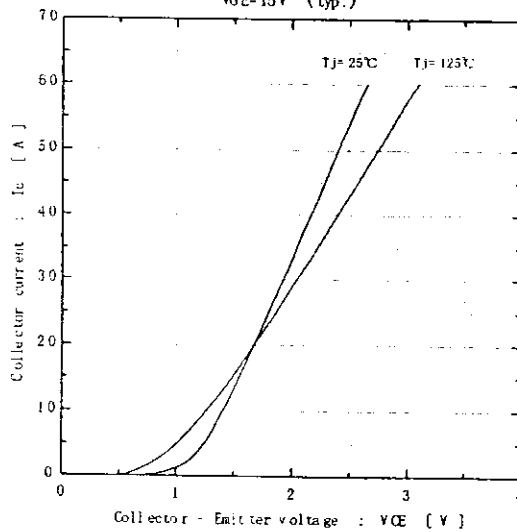


[Inverter]
Collector-Emitter voltage vs. Gate-Emitter voltage
 $T_j = 25^\circ\text{C}$ (typ.)

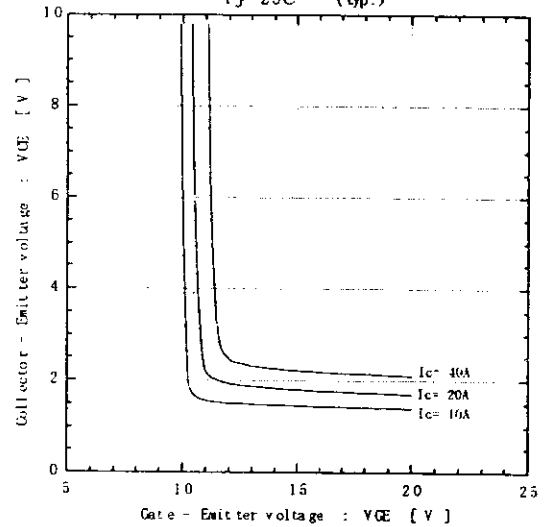







[Inverter]
Capacitance vs. Collector-Emitter voltage (typ.)
 $V_{GE} = 0\text{V}$, $f = 1\text{MHz}$, $T_j = 25^\circ\text{C}$

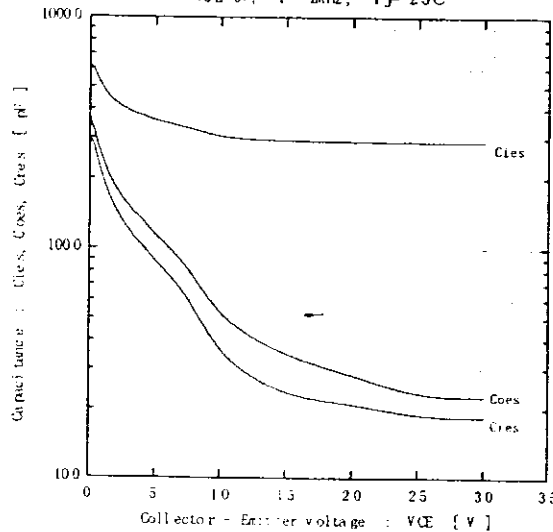

[Inverter]
Dynamic Gate charge (typ.)
 $V_{CC} = 300\text{V}$, $I_C = 20\text{A}$, $T_j = 25^\circ\text{C}$

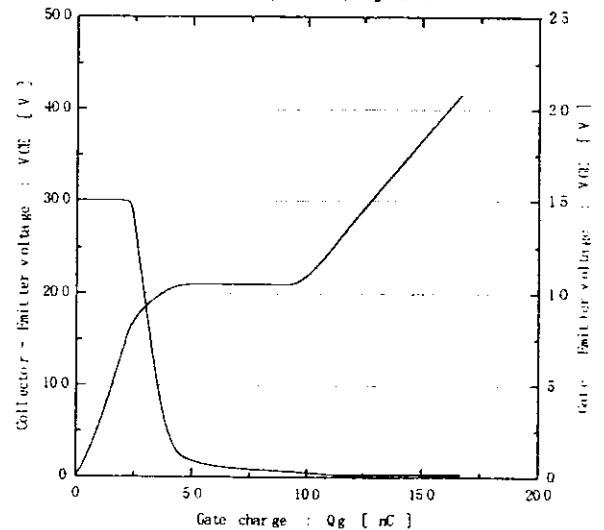


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, nor disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

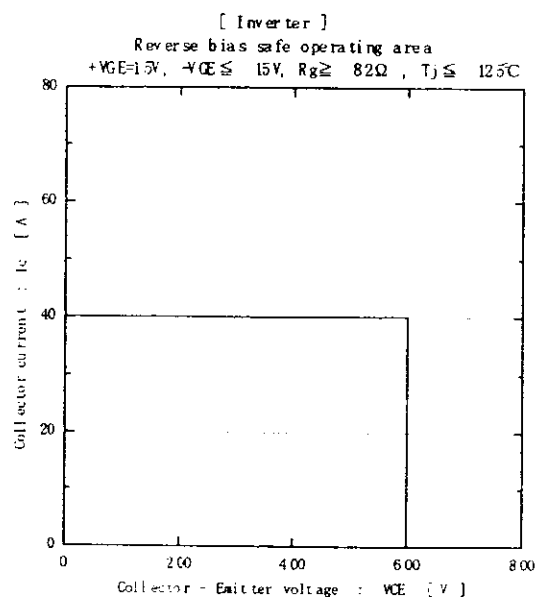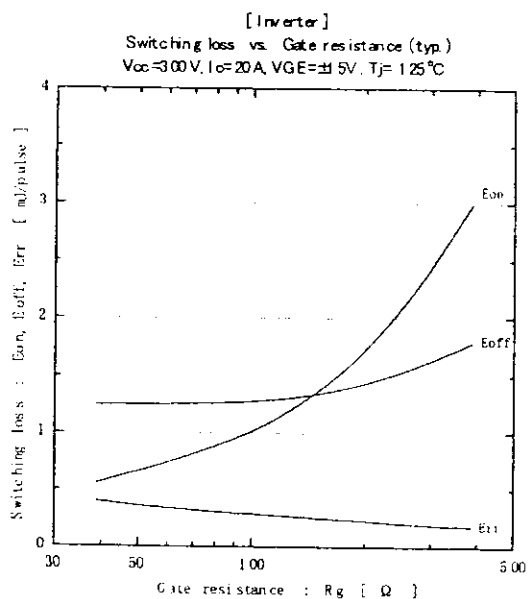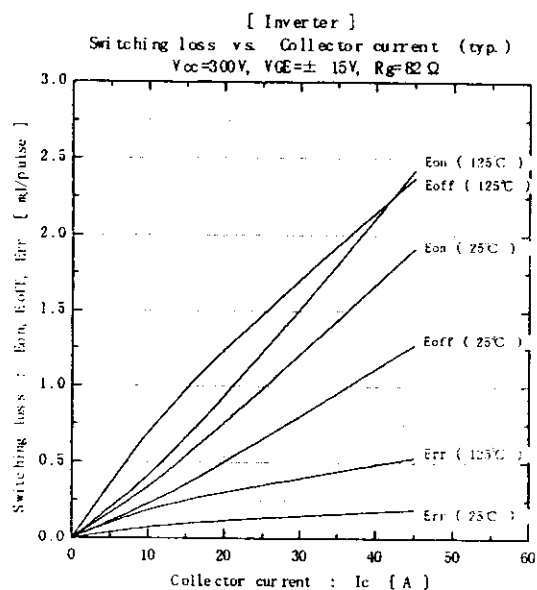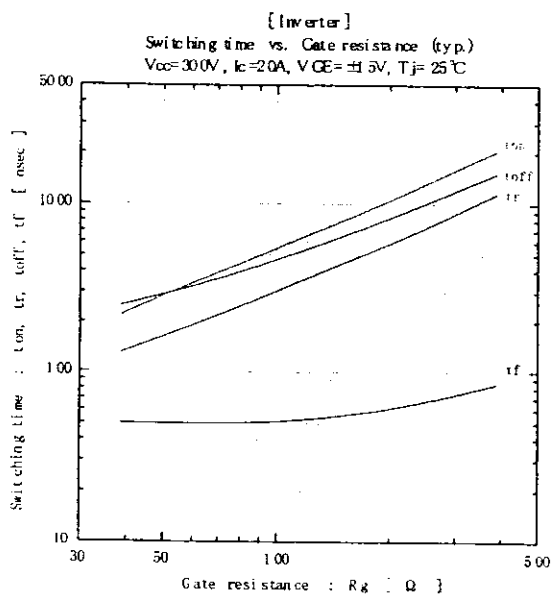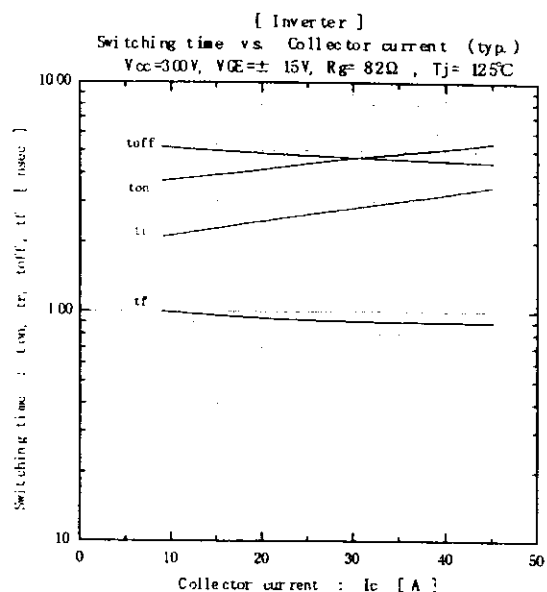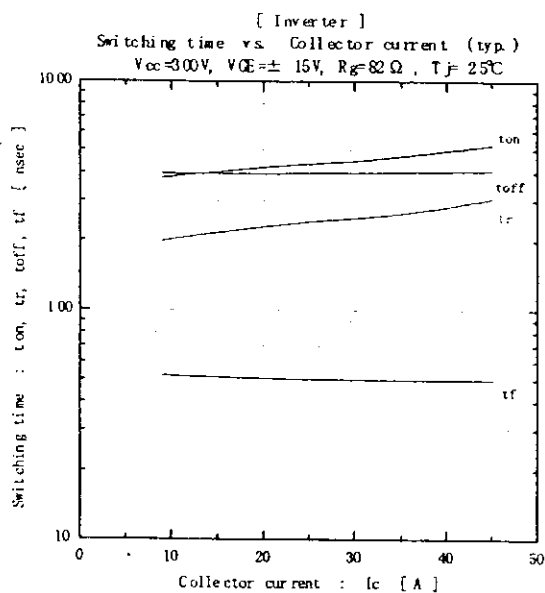


This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.


[Inverter]
Forward current vs. Forward on voltage (typ.)

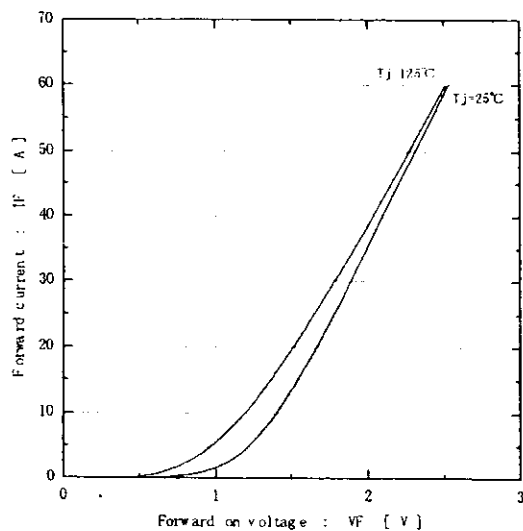


[Inverter]
Reverse recovery characteristics (typ.)
 $V_{ce}=300V$, $V_{GE}=\pm 15V$, $R_g=82\Omega$

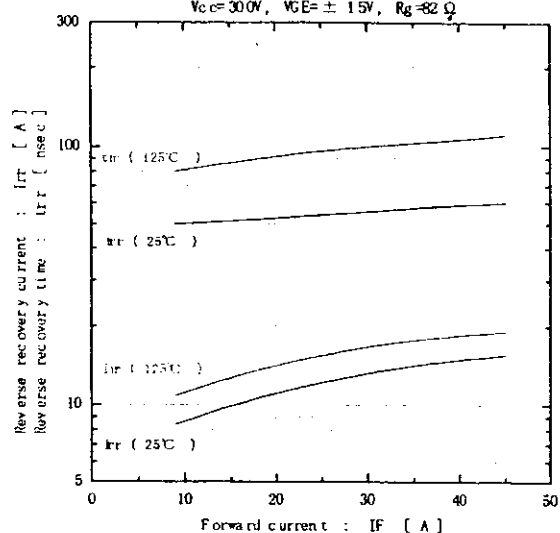


[Converter]
Forward current vs. Forward on voltage (typ.)

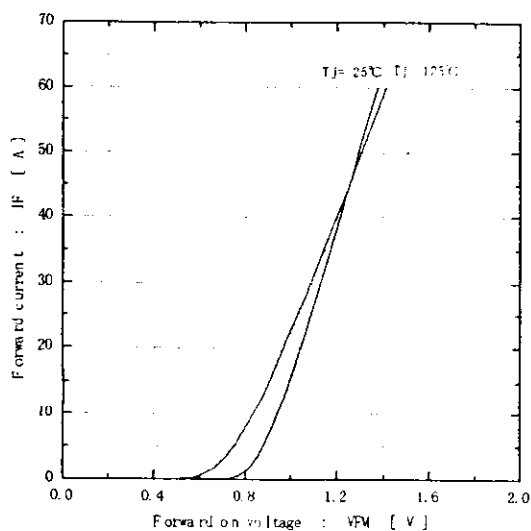

Transient thermal resistance

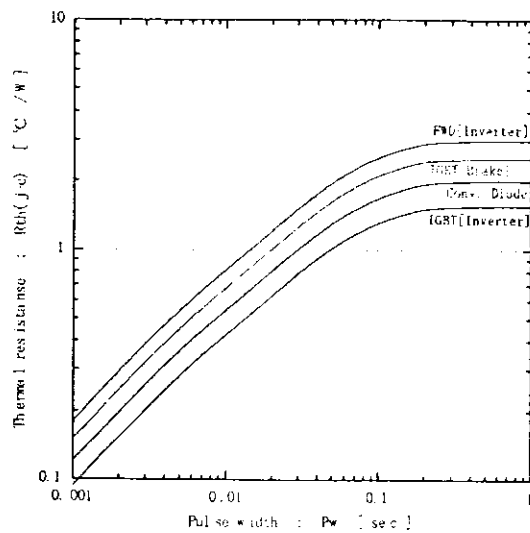

[Thermistor]
Temperature characteristic (typ.)

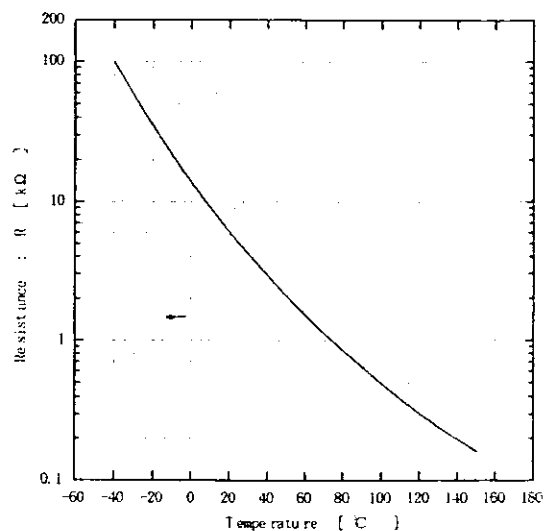

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co. Ltd.

