

SPECIFICATION

(TENTATIVE)

Product Name : IGBT Module (Power Integrated Module)

Type Name : 7MBR25PE120

Spec. No. : MT6M1817

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express, written consent of Fuji Electric Co. Ltd.

Fuji Electric Co.,Ltd. (Matsumoto Factory)

This specification is subject to change without notice.

DATE	NAME	APPROVED
DRAWN Mar - 4 - 97	Y. Arita	
CHECKED Mar - 6 - 97	S. Matsuoka	

Fuji Electric Co.,Ltd.

MT6M1817

G.N.O.

1/1


7 M B R 2 5 P E 1 2 0

(TENTATIVE)

1. Outline Drawing

Unit : mm

*Isolation Voltage (Terminal to Case) : AC 2500V 1 minute

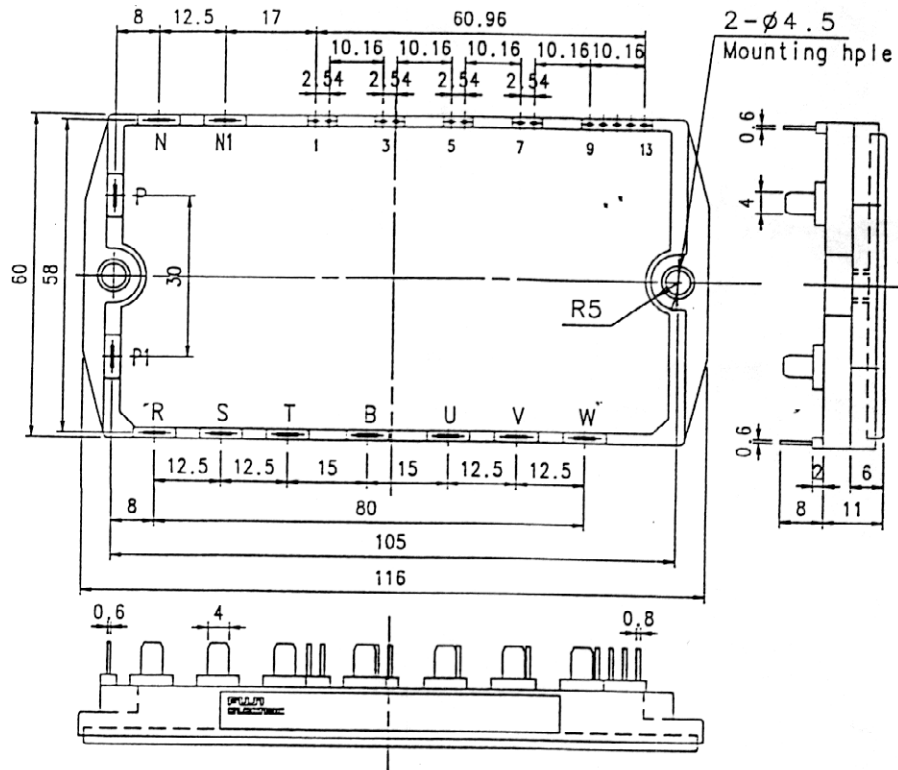


2. Equivalent Circuit of Module

[Converter]

[Brake]

[Inverter]

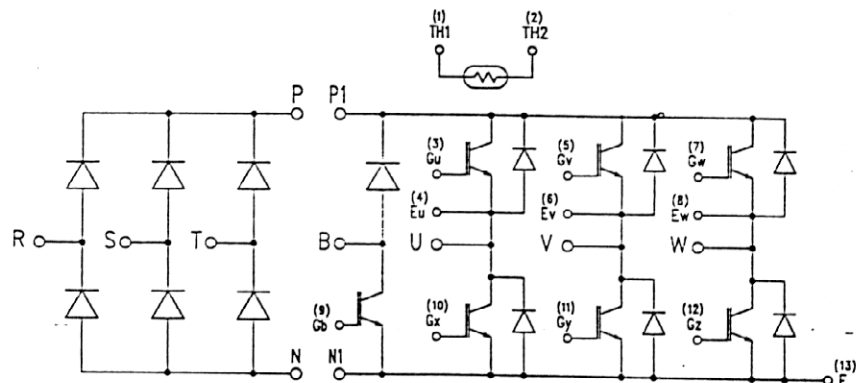

*This specification is changed without notes.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

3. Absolute Maximum Ratings (Tc=25°C unless without specified)

Items		Symbols	Conditions	Maximum Ratings	Uni
Inverter	Collector-Emitter Voltage	V _{CEs}		1200	V
	Gate-Emitter Voltage	V _{GES}		±20	V
	Collector Current	I _c	Continuous	25	A
		I _{CP}	1ms	50	A
		-I _c		25	A
	Collector Power Dissipation	P _c	1 device	200	W
Brake	Collector-Emitter Voltage	V _{CEs}		1200	V
	Gate-Emitter Voltage	V _{GES}		±20	V
	Collector Current	I _c	Continuous	15	A
		I _{CP}	1ms	30	A
	Collector power Dissipation	P _c	1 device	120	W
	Repetitive peak Reverse Voltage	V _{RRM}		1200	V
	Average Forward Current	I _{F (AV)}		1	A
	Surge Current	I _{FSM}	10ms	50	A
Converter	Repetitive Peak Reverse Voltage	V _{RRM}		1600	V
	Output Current	I _o		25	A
	Surge Current (Non-Repetitive)	I _{FSM}	Tj=150°C	286	A
	I ² t (Non-Repetitive)		Tj=150°C	340	A ² s
Operating Junction Temperature		Tj		+ 150	°C
Storage Temperature		Tstg		-40 ~ +125	°C
Isolation Voltage		Viso	AC : 1 minute	AC 2500	V
Mounting Screw Torque (*1)				1.7	N ·

Note : (*1) Recommendable Value : 1.3 ~ 1.7 N · m (M4)

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

4. Electrical Characteristics (Tj=25°C unless without specified)

Characteristics		Symbols	Conditions	min.	max.	Units
Inverter	Zero gate voltage collector current	I _{CES}	V _{CE} =1200V V _{GE} = 0V		1.0	mA
	Gate-emitter leakage current	I _{GES}	V _{CE} = 0V V _{GE} =±20V		20	μA
	Gate-emitter threshold voltage	V _{GE(th)}	V _{CE} =20V I _C =25mA	6.0	9.0	V
	Collector-emitter saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =25A		3.0	V
	Collector-Emitter Voltage	-V _{CE}	-I _C =25A		3.0	
	Input capacitance	C _{ies}	V _{GE} =0V V _{CE} =10V f=1MHz	4000 (typ.)		pF
	Switching Time	ton	V _{CC} = 600V I _C = 25A V _{GE} =±15V R _G = 51Ω		1.2	μs
		tr			0.6	
		toff			1.0	
		tf			0.3	
	Reverse Recovery Time of FRD	trr	I _F = 25A		350	ns
Brake	Zero gate voltage collector current	I _{CES}	V _{CE} =1200V V _{GE} = 0V		1.0	mA
	Gate-emitter leakage current	I _{GES}	V _{CE} = 0V V _{GE} =±20V		100	nA
	Collector-emitter Saturation Voltage	V _{CE(sat)}	I _C = 15A V _{GE} =15V		3.0	V
	Switching Time	ton	V _{CC} = 600V I _C = 15A V _{GE} =±15V R _G = 82Ω		1.2	μs
		tr			0.6	
		toff			1.0	
		tf			0.3	
	Reverse Current	I _{RRM}	V _R =1200V		1	mA
	Reverse Recovery Time	trr			350	ns

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Characteristics		Symbols	Conditions	min.	max.	Units
Converter	Forward Voltage	V_{FM}	$I_F = 25A$		1.5	V
	Reverse Current	I_{RRM}	$V_R = 1600V$		1	mA
Thermistor						

5. Thermal Characteristics

Characteristics	Symbols	Conditions	min.	max.	Units
Thermal Resistance (1 device)	Rth(j-c)	Inverter IGBT		0.63	°C/W
		Inverter FRD		1.70	
		Brake IGBT		1.04	
		Converter Diode		1.50	
Contact Thermal Resistance	Rth(c-f)	With Thermal Compound	(typ) 0.05		