


7MBR75GE060

IGBT Modules

IGBT MODULE

600V / 75A / PIM

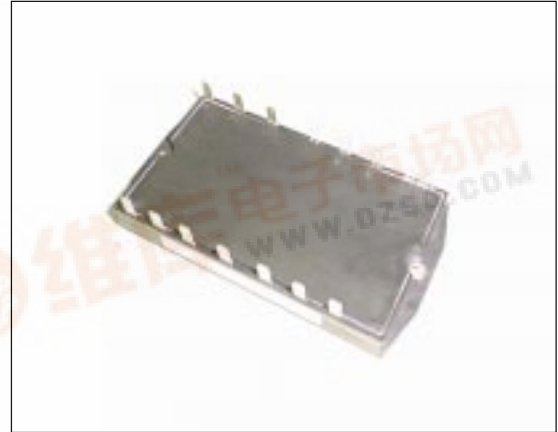

■ Features

- High Speed Switching
- Voltage Drive
- Low Inductance Module Structure
- Converter Diode Bridge Dynamic Brake Circuit

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply

■ Maximum ratings and characteristics

● Absolute maximum ratings (Tc=25°C unless without specified)

Item	Symbol	Condition	Rating	Unit	
Inverter	Collector-Emitter voltage	V _{CES}	600	V	
	Gate-Emitter voltage	V _{GES}	±20	V	
	Collector current	I _C	Continuous	75	A
		I _{CP}	1ms	150	A
		-I _C		75	A
Collector power dissipation	P _C	1 device	300	W	
Brake	Collector-Emitter voltage	V _{CES}	600	V	
	Gate-Emitter voltage	V _{GES}	±20	V	
	Collector current	I _C	Continuous	50	A
		I _{CP}	1ms	100	A
	Collector power dissipation	P _C	1 device	200	W
	Repetitive peak reverse voltage	V _{RRM}		600	V
	Average forward current	I _{F(AV)}		1	A
	Surge current	I _{FSM}	10ms	50	A
Converter	Repetitive peak reverse voltage	V _{RRM}	800	V	
	Non-Repetitive peak reverse voltage	V _{RSM}	900	V	
	Average output current	I _O	50/60Hz sine wave	50	A
	Surge current (Non-Repetitive)	I _{FSM}	T _j =150°C, 10ms	350	A
	I _{pt} (Non-Repetitive)		T _j =150°C, 10ms	648	A ² s
Operating junction temperature	T _j		+150	°C	
Storage temperature	T _{stg}		-40 to +125	°C	
Isolation voltage	V _{iso}	AC : 1 minute	AC 2500	V	
Mounting screw torque			1.7 *1	N·m	

*1 Recommendable value : 1.3 to 1.7 N·m (M4)



● Electrical characteristics (Tj=25°C unless without specified)


Item	Symbol	Condition	Characteristics			Unit		
			Min.	Typ.	Max.			
Inverter (IGBT)	Zero gate voltage collector current	ICES	VCE=600V, VGE=0V			1.0	mA	
	Gate-Emitter leakage current	IGES	VCE=0V, VGE=±20V			0.2	µA	
	Gate-Emitter threshold voltage	VGE(th)	VCE=20V, Ic=75mA			5.5	V	
	Collector-Emitter saturation voltage	VCE(sat)	VGE=15V Ic=75A	chip			2.8	V
				Terminal			3.1	V
	Collector-Emitter voltage	-VCE	-Ic=75A	chip			3.0	V
				Terminal			3.3	V
	Input capacitance	Cies	VGE=0V, VCE=10V, f=1MHz			6000	pF	
	Switching time	ton	VCC=300V				1.2	µs
		tr	Ic=75A				0.6	µs
toff		VGE=±15V				1.0	µs	
tf		RG=33 ohm				0.35	µs	
Reverse recovery time of FRD	trr	IF=75A				0.3	µs	
Brake (IGBT)	Zero gate voltage collector current	ICES	VCE=600V, VGE=0V			1.0	mA	
	Gate-Emitter leakage current	IGES	VCE=0V, VGE=±20V			0.1	µA	
	Collector-Emitter saturation voltage	VCE(sat)	Ic=50A, VGE=15V			2.8	V	
	Switching time	ton	VCC=300V				0.8	µs
		tr	Ic=50A				0.6	µs
toff		VGE=±15V				1.0	µs	
tf		RG=51ohm				0.35	µs	
Brake (FWD)	Reverse current	IRRM	VR=600V			1	mA	
	Reverse recovery time	trr				0.6	µs	
Converter	Forward voltage	VFM	IF=50A			1.55	V	
	Reverse current	IRRM	VR=800V			1.0	mA	

● Thermal Characteristics

Item	Symbol	Condition	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance (1 device)	Rth(j-c)	Inverter IGBT			0.42	°C/W
		Inverter FRD			1.10	
		Brake IGBT			0.63	
		Brake FRD			3.57	
		Converter Diode			2.10	
Contact thermal resistance *	Rth(c-f)	With thermal compound		0.05		

* This is the value which is defined mounting on the additional cooling fin with thermal compound


■ Equivalent Circuit Schematic

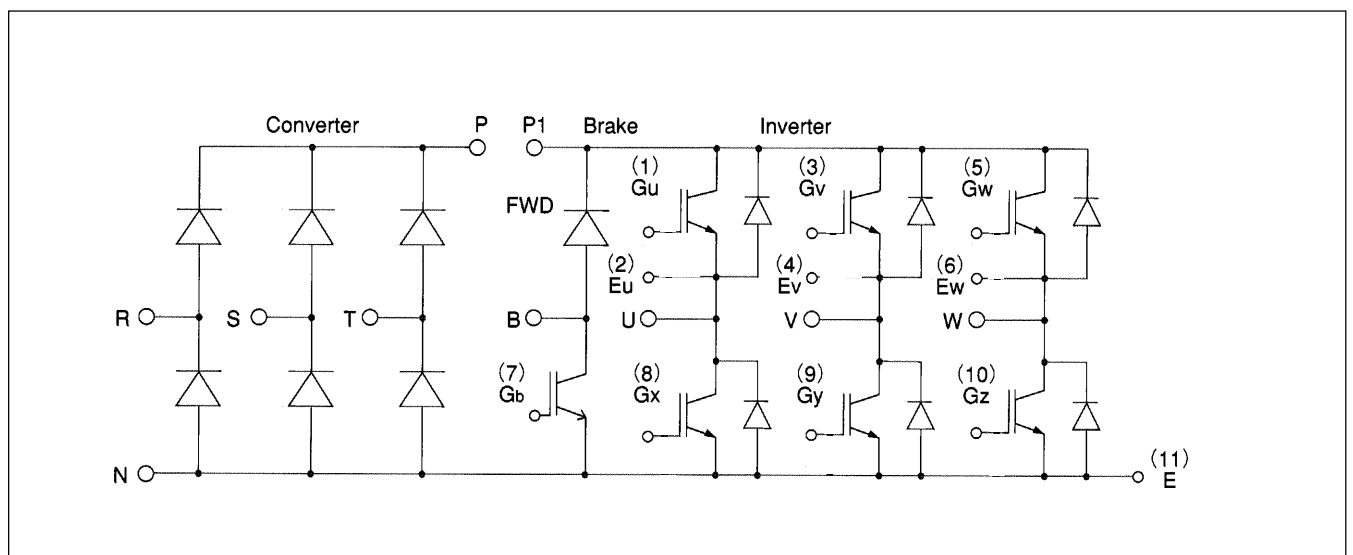


Characteristics (Representative)

Inverter


Collector current vs. Collector-Emitter voltage
T_j=25°C

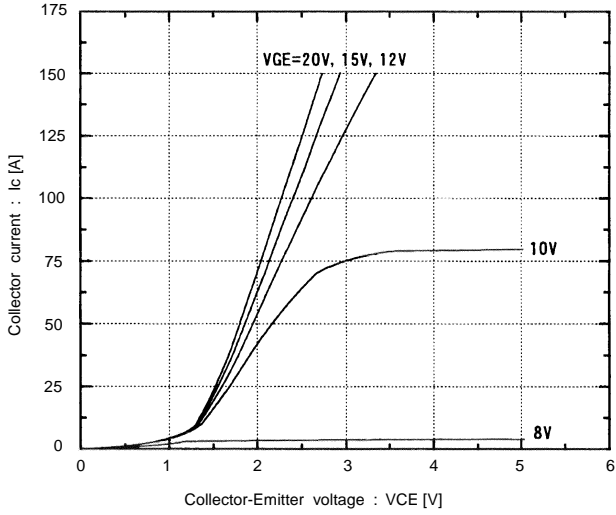


Collector current vs. Collector-Emitter voltage
T_j=125°C

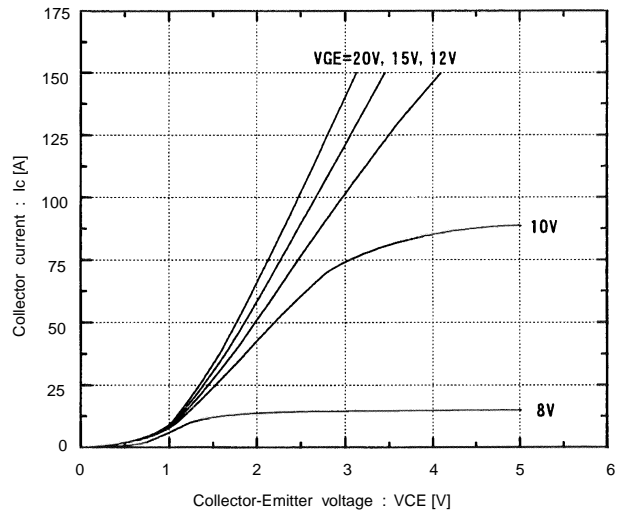


Collector-Emitter vs. Gate-Emitter voltage
T_j=25°C

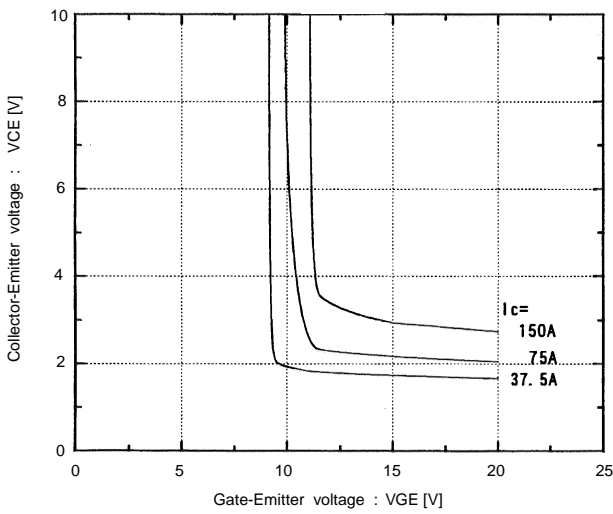


Collector-Emitter vs. Gate-Emitter voltage
T_j=125°C






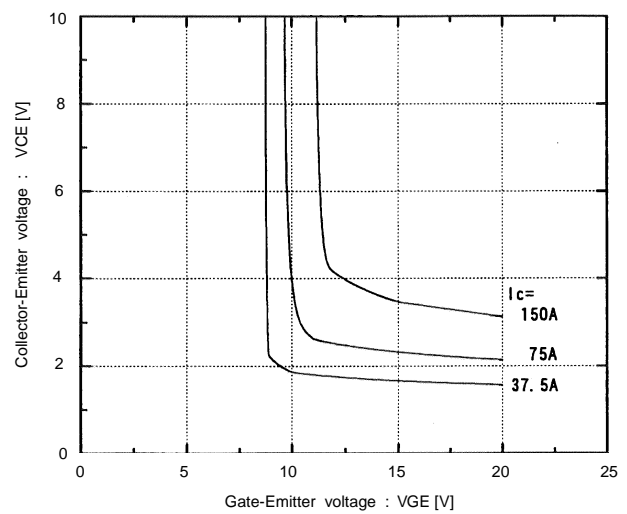


Switching time vs. Collector current
V_{cc}=300V, R_G=33 ohm, V_{GE}=±15V, T_j=25°C

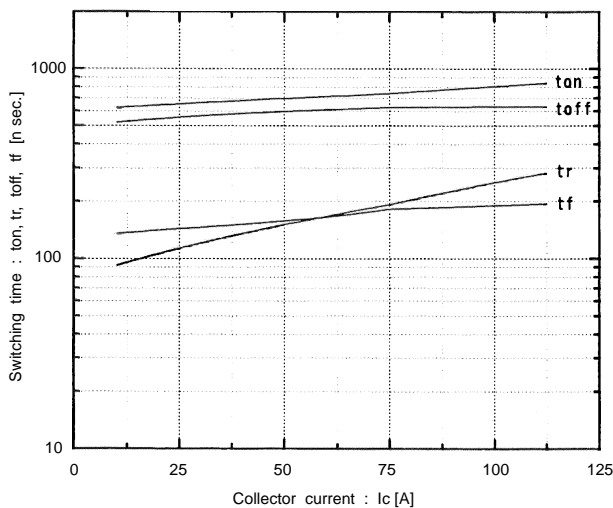


Switching time vs. Collector current
V_{cc}=300V, R_G=33 ohm, V_{GE}=±15V, T_j=125°C

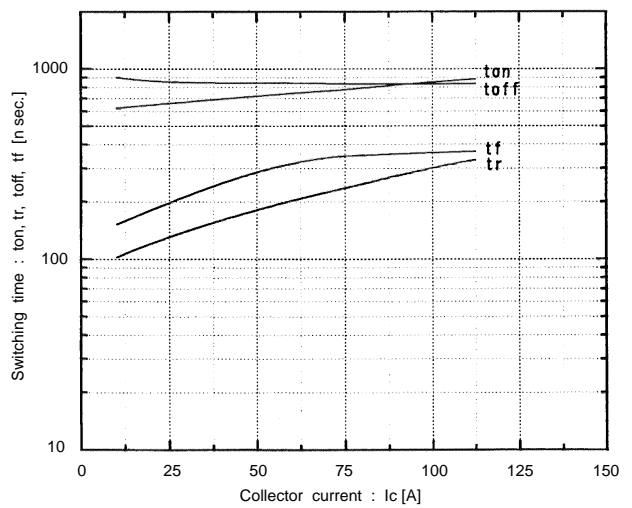


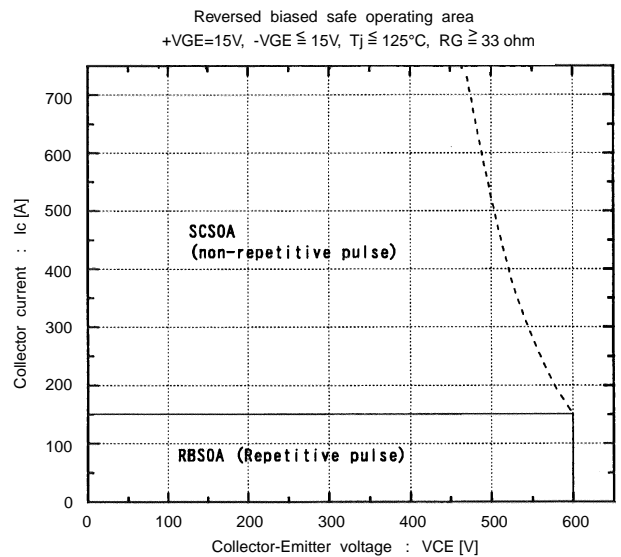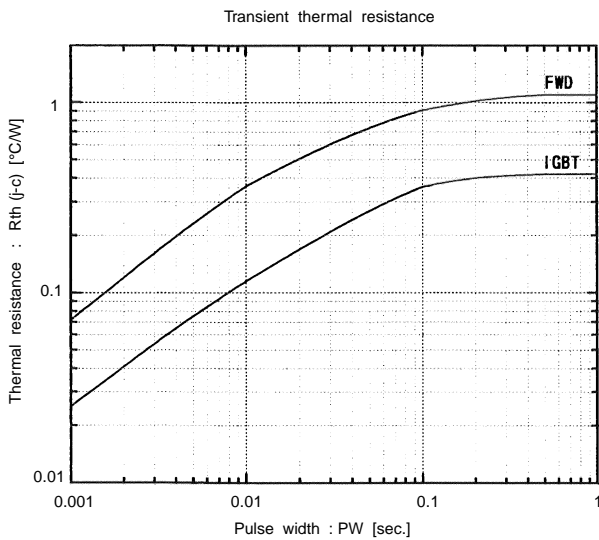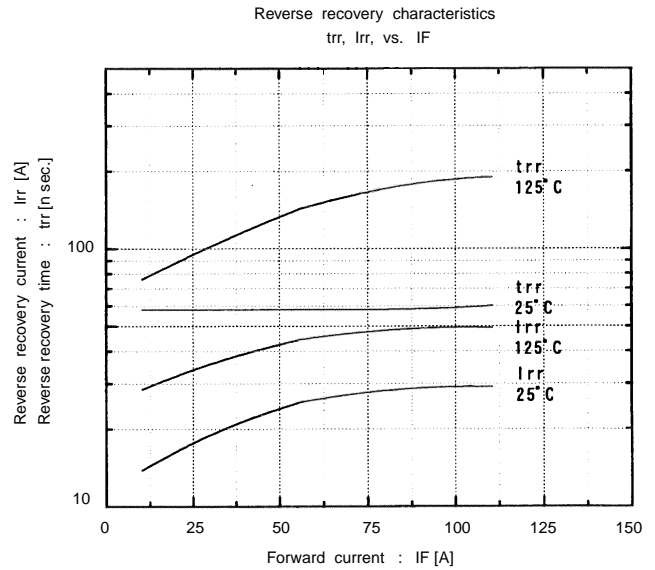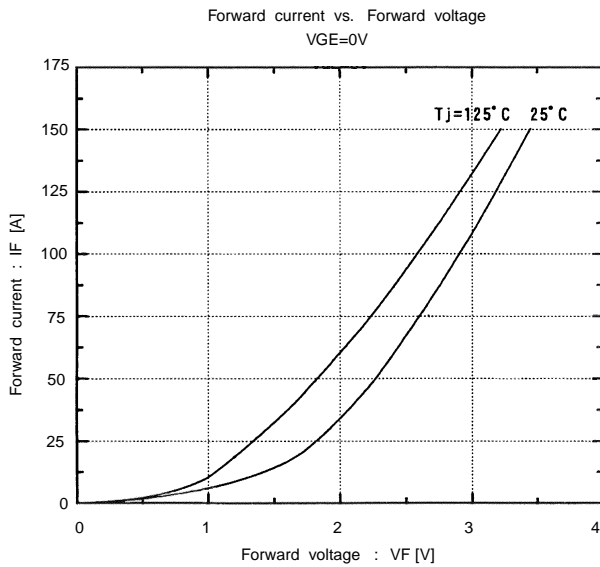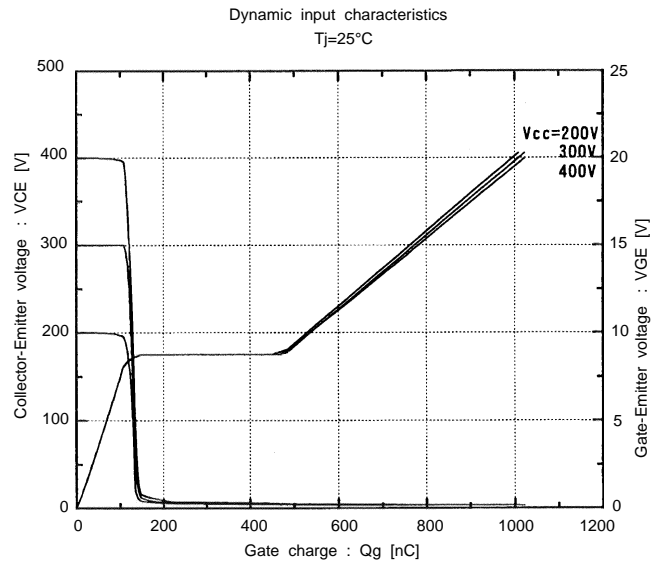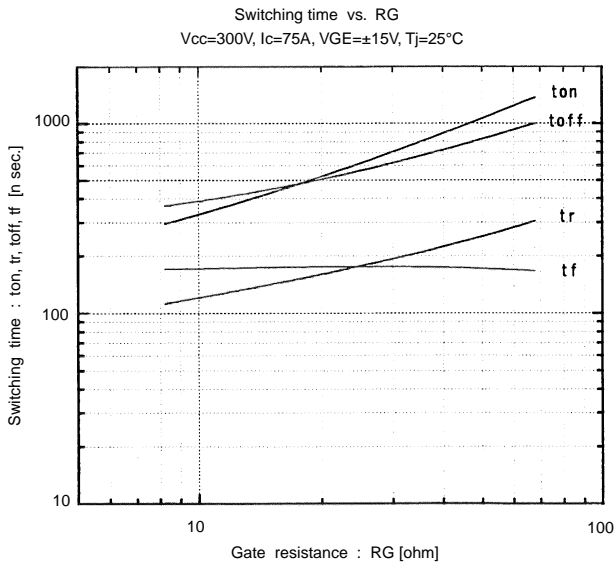


Switching loss vs. Collector current
 $V_{cc}=300V, R_G=33\text{ ohm}, V_{GE}=\pm 15V$

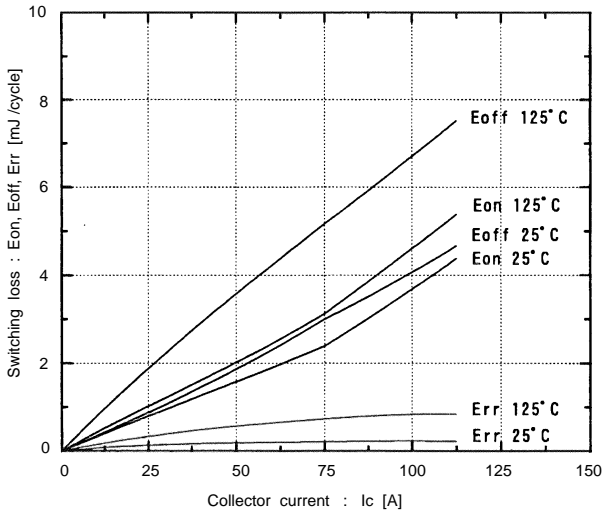







Capacitance vs. Collector-Emitter voltage
 $T_j=25^\circ C$





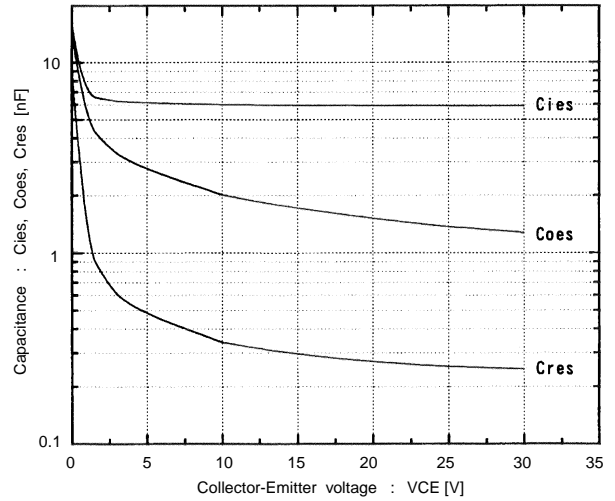


Converter Diode
 Forward current vs. Forward voltage

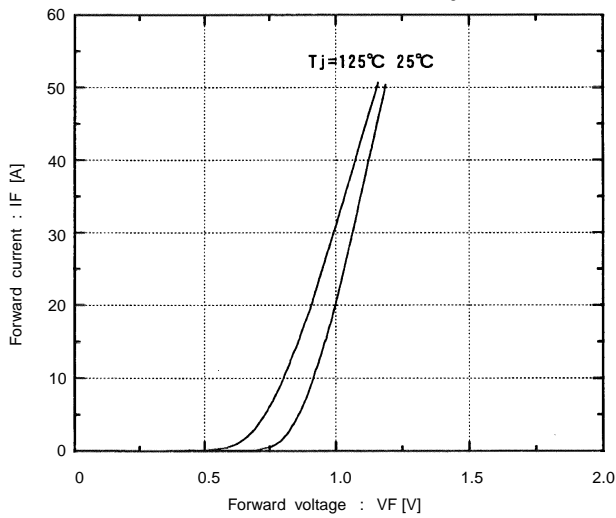


● Brake

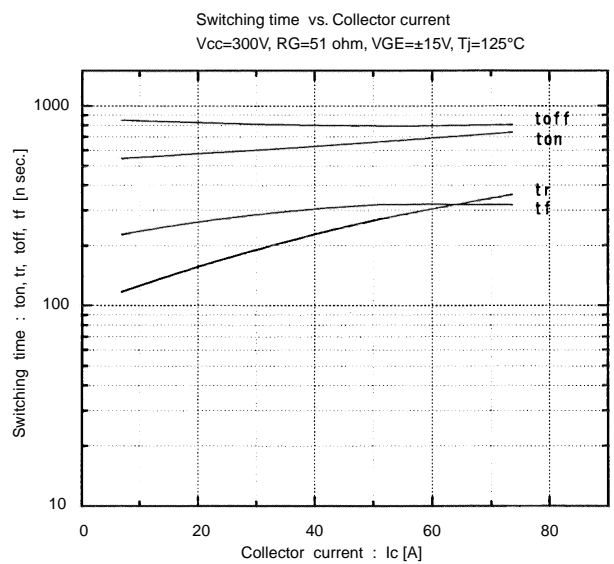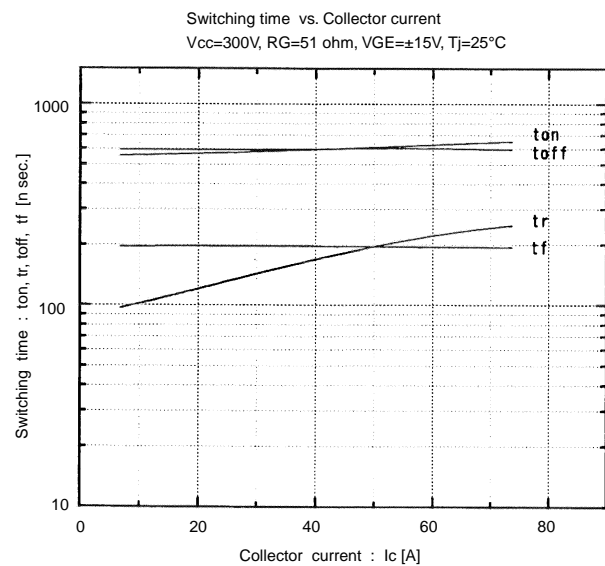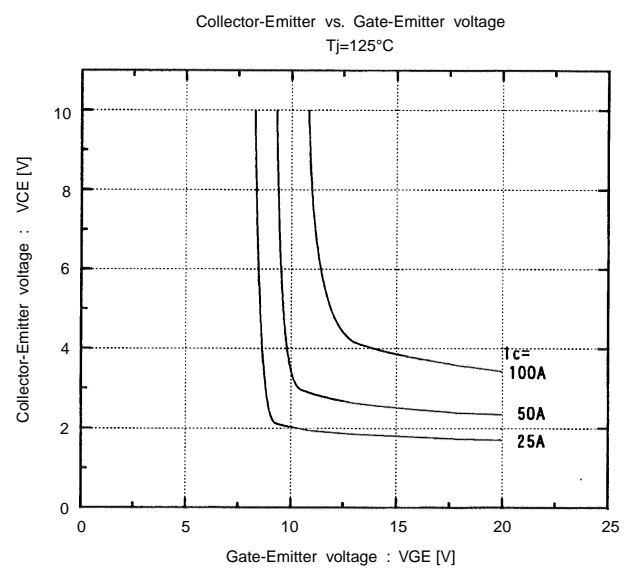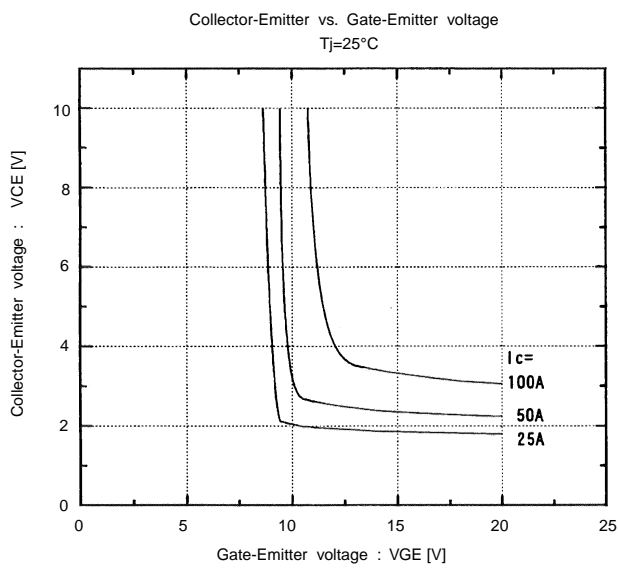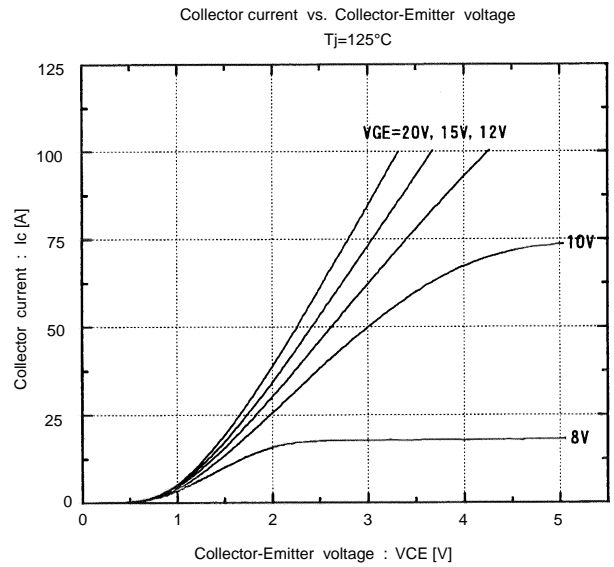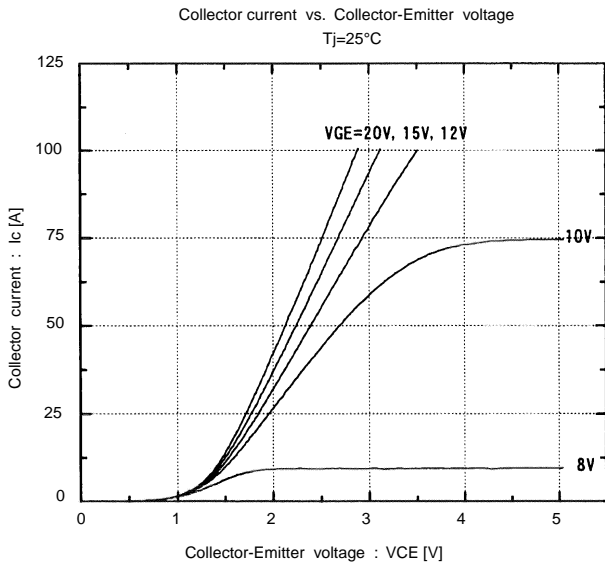

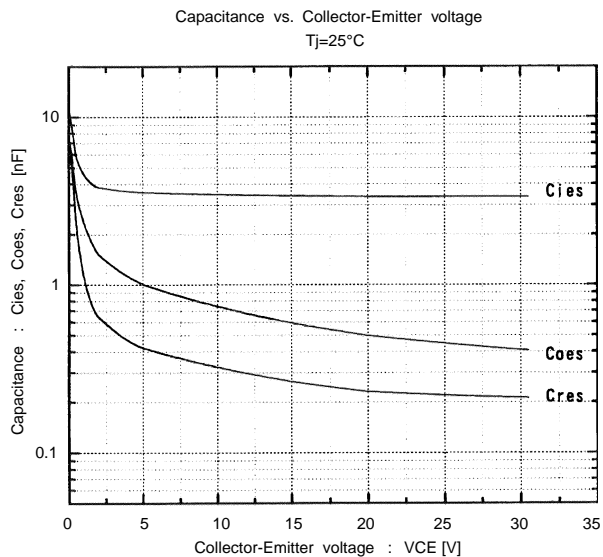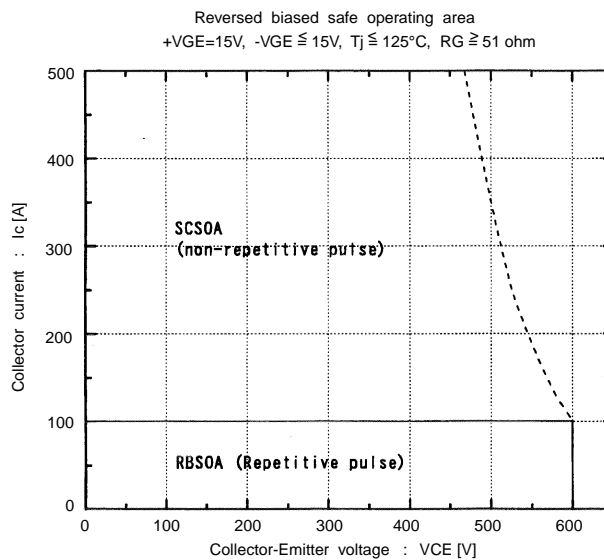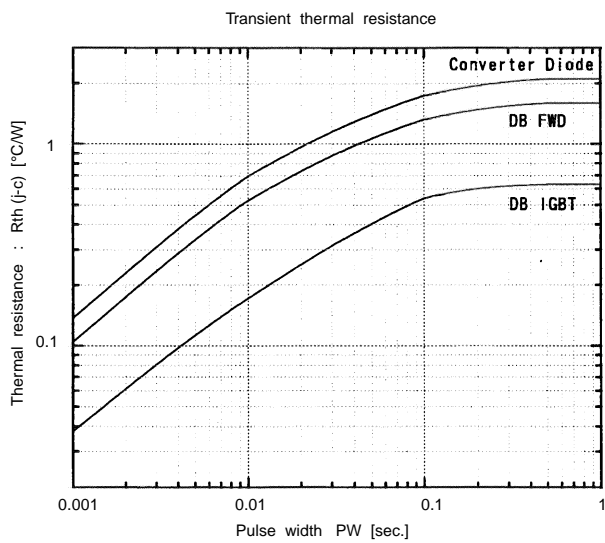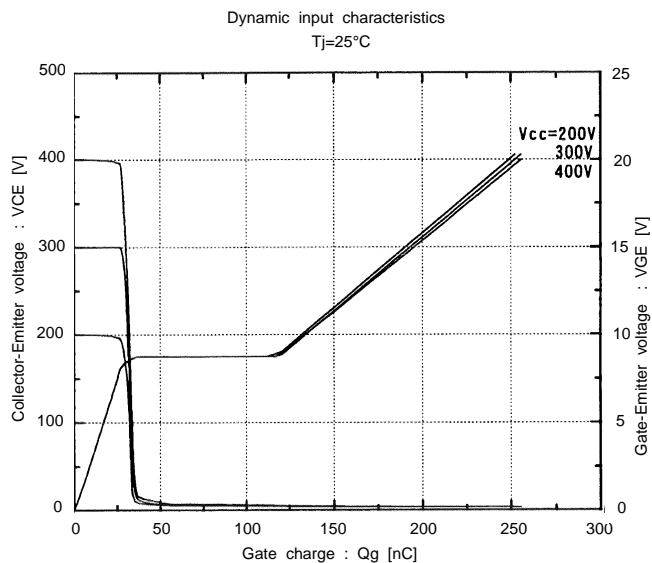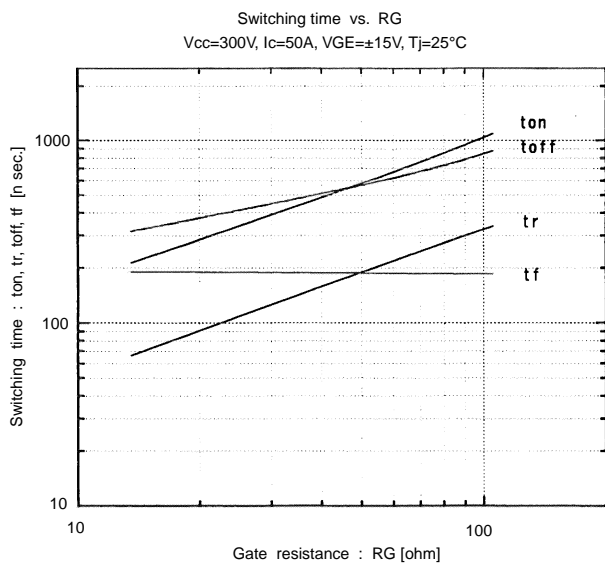

■ Outline Drawings, mm

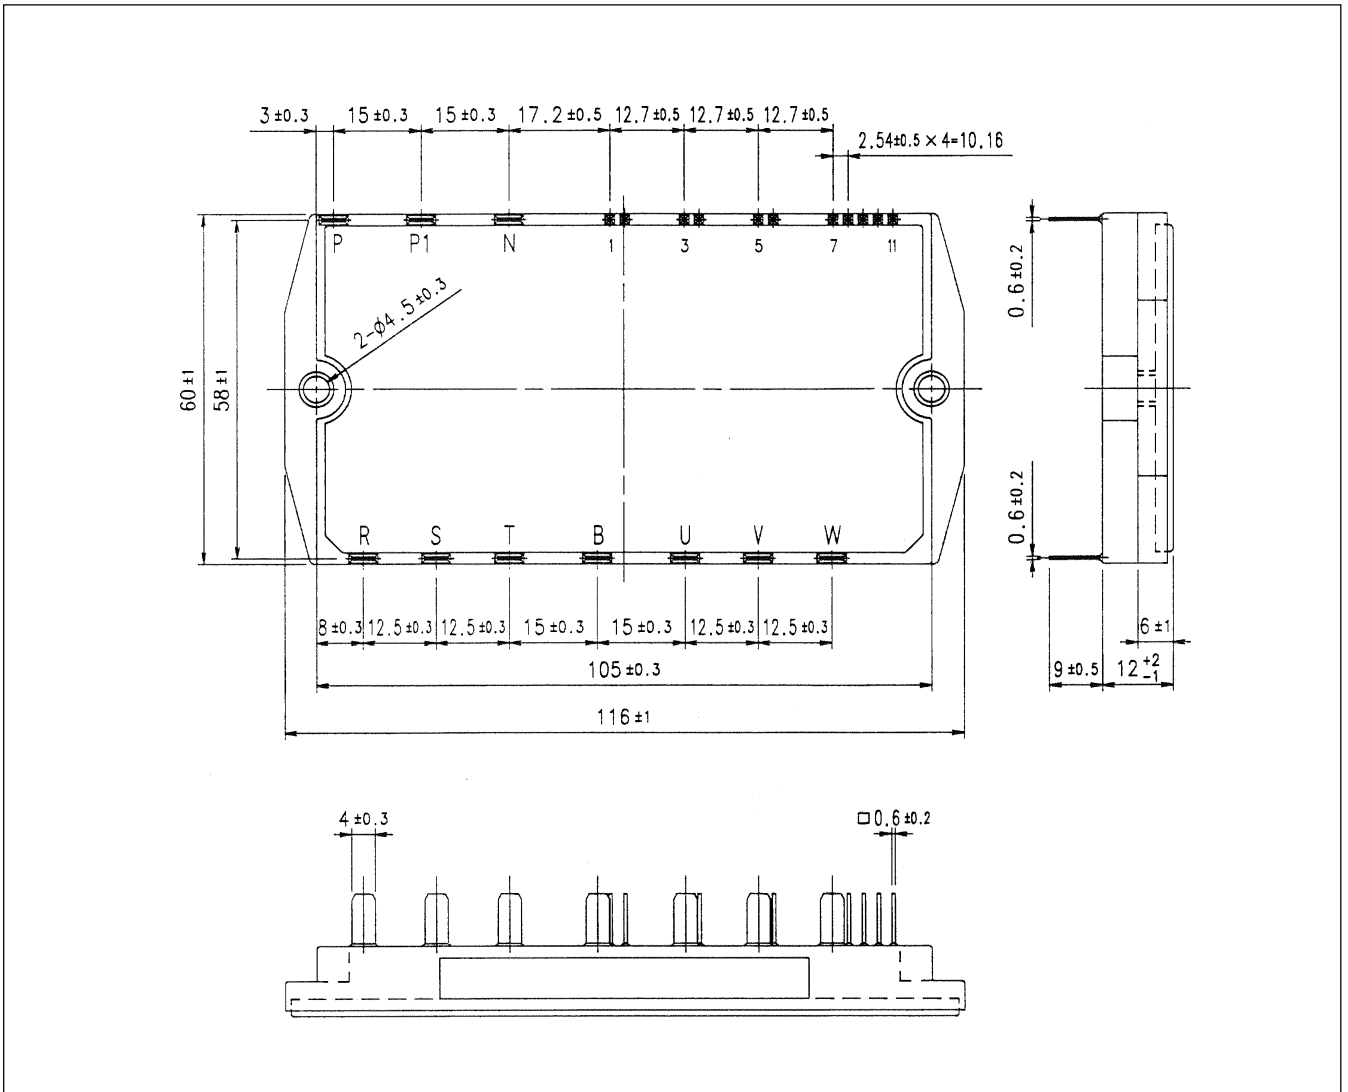

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>