



PHYSICAL DIMENSIONS:

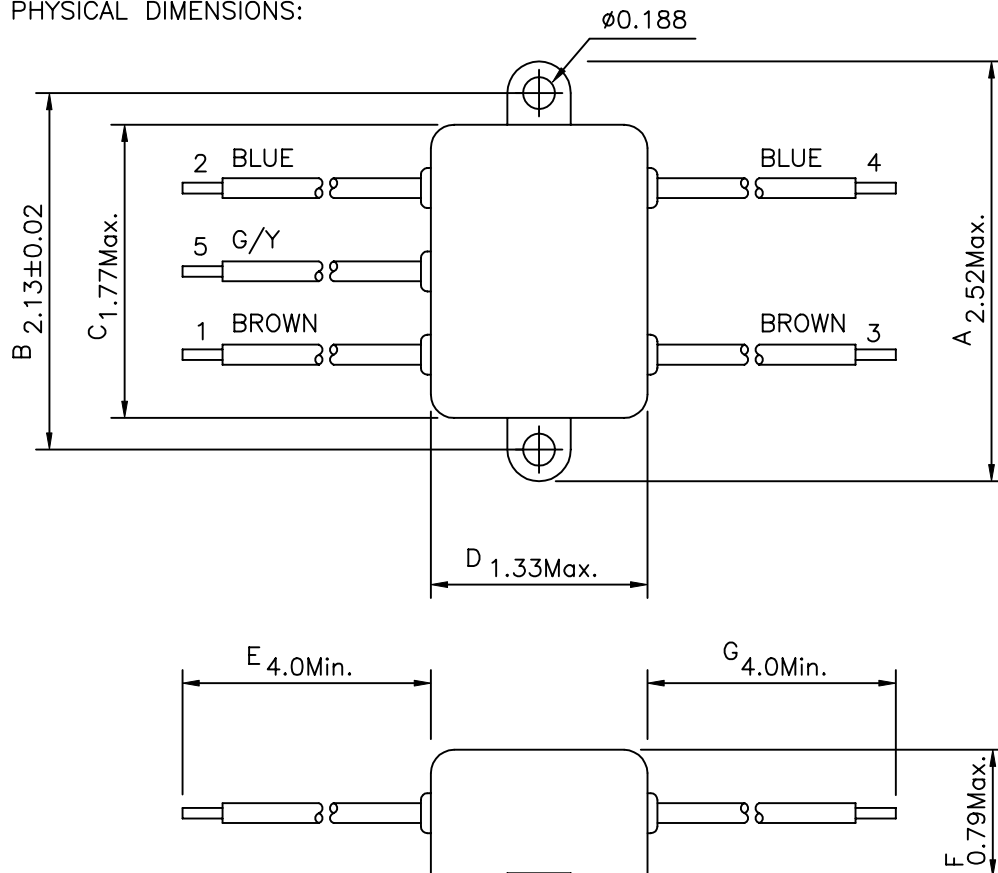

SCHEMATIC:

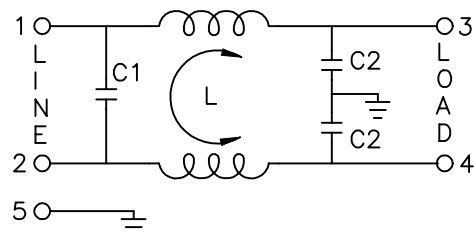

L: 2.9mH
C1: 0.1uF
C2: 3300pF

Revision			
Rev.	Description	Date	Approved

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING 115/250VAC
- 1-2. CURRENT RATING
A. AT 115VAC 5 A RMS Max.
B. AT 250VAC 5 A RMS Max.
- 1-3. OPERATING FREQUENCY..... 50/60 Hz
- 1-4. LEAKAGE CURRENT: EACH LINE TO GROUND
A. @115VAC 60Hz 0.25 mA Max.
B. @250VAC 50Hz 0.45 mA Max.
- 1-5. HIPOT RATING (FOR ONE MINUTE)
A. LINE TO GROUND 2250VDC
B. LINE TO LINE 1450VDC
- 1-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C
- 1-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	15	30	38	45	45	40
DIF. MODE dB	/	/	/	6	15	20	40	45	45

Dim range (mm)	Tolerance +/-(mm)	Qualtek Electronics Corp. PPC DIVISION	
		Part Number: 851-05/006	
0-1	0.15	Description: EMI FILTER	
1-6	0.20		
6-18	0.30	UNIT: INCH	
18-50	0.50		
50-120	0.70	Drawn/Date	Checked/Date
120-250	0.90	B.ZHANG	01-17-03
250-500	1.20	01-17-03	JJH/01-17-03