

# 2SC5478

Silicon NPN triple diffusion mesa type


For horizontal deflection output

### Features

- High breakdown voltage, and high reliability through the use of a glass passivation layer
- High-speed switching
- Wide area of safe operation (ASO)

### Absolute Maximum Ratings (T<sub>C</sub>=25°C)

Parameter	Symbol	Ratings	Unit	
Collector to base voltage	V <sub>CB0</sub>	1700	V	
Collector to emitter voltage	V <sub>CES</sub>	1700	V	
	V <sub>CEO</sub>	600	V	
Emitter to base voltage	V <sub>EBO</sub>	5	V	
Peak collector current	I <sub>CP</sub>	25	A	
Collector current	I <sub>C</sub>	14	A	
Base current	I <sub>B</sub>	7.5	A	
Collector power dissipation	P <sub>C</sub>	T <sub>C</sub> =25°C	60	W
		T <sub>a</sub> =25°C	3.0	
Junction temperature	T <sub>j</sub>	150	°C	
Storage temperature	T <sub>stg</sub>	-55 to +150	°C	

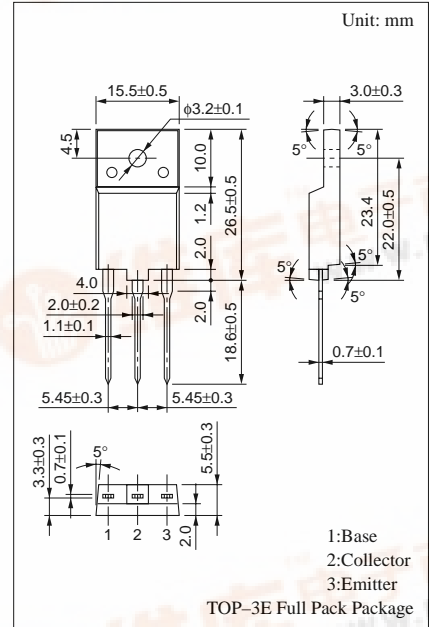


### Electrical Characteristics (T<sub>C</sub>=25°C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = 1000V, I <sub>E</sub> = 0			50	μA
		V <sub>CB</sub> = 1500V, I <sub>E</sub> = 0			1	mA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = 5V, I <sub>C</sub> = 0			50	μA
Forward current transfer ratio	h <sub>FE</sub>	V <sub>CE</sub> = 5V, I <sub>C</sub> = 7A	5		12	
Collector to emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 7A, I <sub>B</sub> = 1.75A			3	V
Base to emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = 7A, I <sub>B</sub> = 1.75A			1.5	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = 10V, I <sub>C</sub> = 0.1A, f = 0.5MHz		3		MHz
Storage time	t <sub>stg</sub>	I <sub>C</sub> = 7A, I <sub>B1</sub> = 1.75A, I <sub>B2</sub> = -3.5A			2.7	μs
Fall time	t <sub>f</sub>				0.2	μs



$P_C$  —  $T_a$

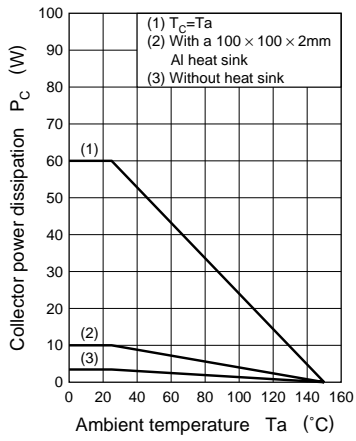

Area of safe operation, horizontal operation ASO

