



SMDA05CM
thru
SMDA24CM

STANDARD CAPACITANCE TVS ARRAY

APPLICATIONS

- ✓ RS-232, RS-422 & RS-423 Data Lines
- ✓ Microprocessor Based Equipment
- ✓ Control & Monitoring Equipment
- ✓ Modems
- ✓ Portable Electronics
- ✓ Medical Electronics

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 12A, 8/20 μ s - Level 1(Line-Gnd) & Level 2(Line-Line)

FEATURES


- ✓ 500 Watts Peak Pulse Power per Line (tp=8/20 μ s)
- ✓ Bidirectional Configurations
- ✓ Monolithic Design
- ✓ Available in Voltage Types Ranging From: 5V to 24V
- ✓ Protects 4 - 7 Lines
- ✓ ESD Protection > 40 kilovolts
- ✓ RoHS Compliant in Lead-Free Versions

MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SO-8 Package
- ✓ Weight 70 milligrams (Approximate)
- ✓ Available in Tin-Lead or Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:
 - Tin-Lead - Sn/Pb, 85/15: 240-245°C
 - Pure-Tin - Sn, 100: 260-270°C
- ✓ Flammability rating UL 94V-0
- ✓ 12mm Tape and Reel Per EIA Standard 481
- ✓ Marking: Logo, Marking Code, Date Code & Pin One Defined By Dot on Top of Package



PIN CONFIGURATION

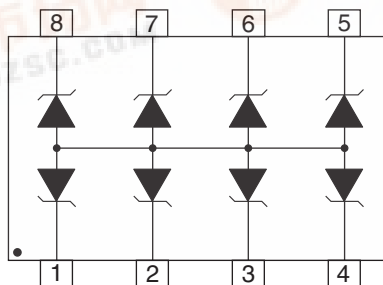


DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	500	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER	DEVICE MARKING CODE	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_P = 1A$ V_C VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs V_C @ I_{PP}	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA	MAXIMUM CAPACITANCE PER LINE @ 0V, 1 MHz C pF
SMDA05CM	REB	5.0	6.0	9.8	19.0V @ 30A	100	350
SMDA08CM	REC	8.0	8.5	13.4	23.7V @ 24A	10	300
SMDA12CM	RED	12.0	13.4	19.0	29.2V @ 20A	1	150
SMDA15CM	REF	15.0	16.7	24.0	31.1V @ 18A	1	100
SMDA24CM	REH	24.0	26.7	43.0	45.0V @ 13A	1	63

GRAPHS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

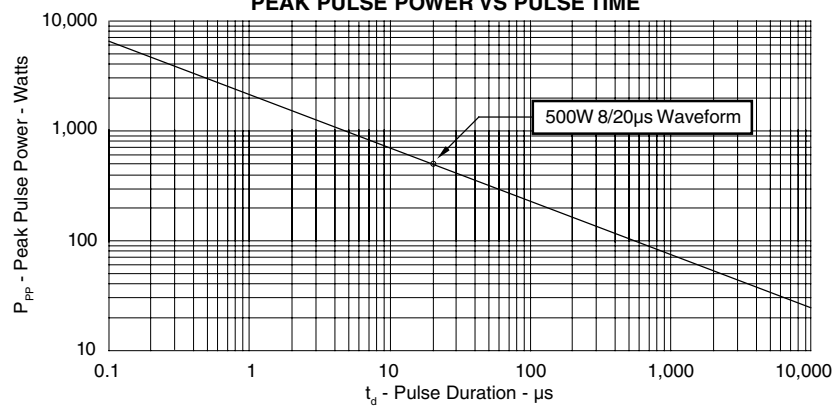

**FIGURE 2
PULSE WAVE FORM**

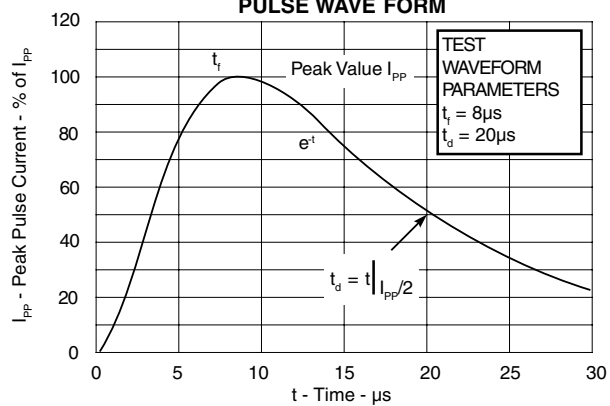

**FIGURE 3
POWER DERATING CURVE**

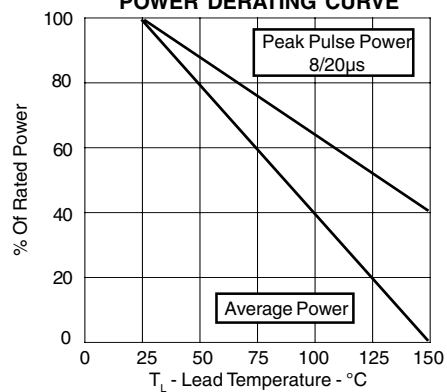

PACKAGE OUTLINE & DIMENSIONS

