

TRIPLE DIFFUSED PLANER TYPE  
HIGH VOLTAGE, HIGH SPEED SWITCHING


### Features

- High voltage, High speed switching
- High reliability

### Applications

- Switching regulators
- Ultrasonic generators
- High frequency inverters
- General purpose power amplifiers

### Outline Drawings

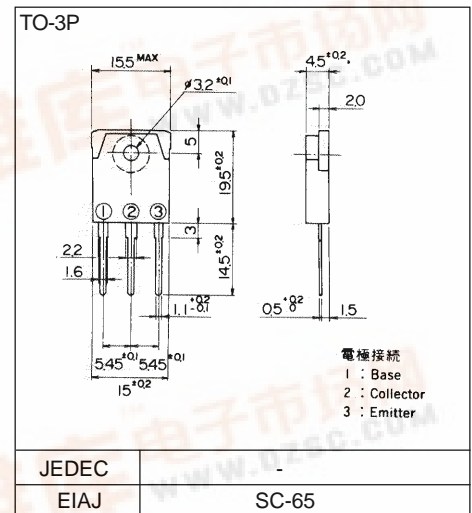

### Maximum ratings and characteristics

#### Absolute maximum ratings (Tc=25°C unless otherwise specified)


Item	Symbol	Ratings	Unit
Collector-Base voltage	V <sub>CBO</sub>	500	V
Collector-Emitter voltage	V <sub>CEO</sub>	400	V
Collector-Emitter voltage	V <sub>CEO(SUS)</sub>	400	V
Emitter-Base voltage	V <sub>EBO</sub>	7	V
Collector current	I <sub>C</sub>	10	A
Base current	I <sub>B</sub>	3	A
Collector power dissipation	P <sub>C</sub>	80	W
Operating junction temperature	T <sub>J</sub>	+150	°C
Storage temperature	T <sub>stg</sub>	-65 to +150	°C

#### Electrical characteristics (Tc = 25°C unless otherwise specified)


Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Base voltage	V <sub>CBO</sub>	I <sub>CBO</sub> = 1mA	500			V
Collector-Emitter voltage	V <sub>CEO</sub>	I <sub>CEO</sub> = 10mA	400			V
Collector-Emitter voltage	V <sub>CEO(SUS)</sub>	I <sub>C</sub> = 0.2A	400	-		V
Emitter-Base voltage	V <sub>EBO</sub>	I <sub>EBO</sub> = 1mA	7	-		V
Collector-Base leakage current	I <sub>CBO</sub>	V <sub>CBO</sub> = 500V		-	1.0	mA
Emitter-Base leakage current	I <sub>EBO</sub>	V <sub>EBO</sub> = 7V		-	1.0	mA
D.C. current gain	h <sub>FE</sub>	I <sub>C</sub> = 5A, V <sub>CE</sub> = 5V	10			
Collector-Emitter saturation voltage	V <sub>CE(Sat)</sub>	I <sub>C</sub> = 5A, I <sub>B</sub> = 1A			1.0	V
Base-Emitter saturation voltage	V <sub>BE(Sat)</sub>				1.5	V
*1 Switching time	t <sub>on</sub>	I <sub>C</sub> = 5A, I <sub>B1</sub> = 1A			0.5	μs
	t <sub>stg</sub>	I <sub>B2</sub> = -2A, R <sub>L</sub> = 30 ohm			1.5	μs
	t <sub>f</sub>	P <sub>w</sub> = 20 μs Duty = <2%			0.15	μs

#### Thermal characteristics


Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(j-c)</sub>	Junction to case			1.55	°C/W

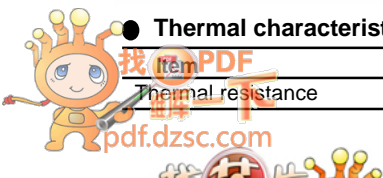


Characteristics

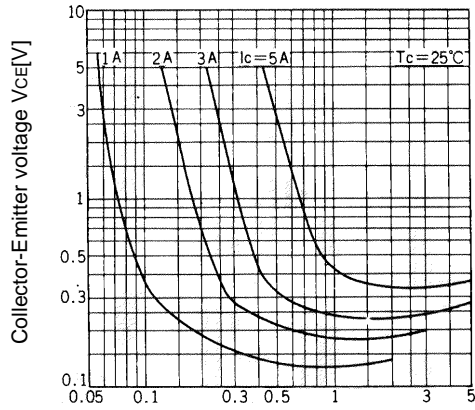


Collector Output Characteristics

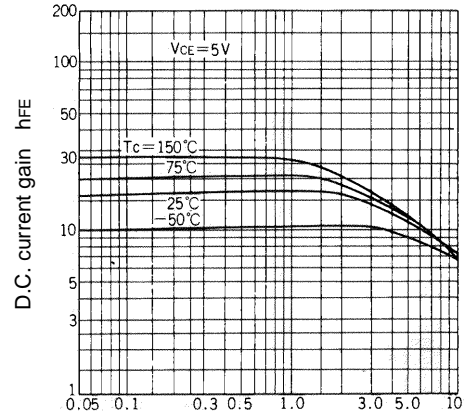


DC Current Gain

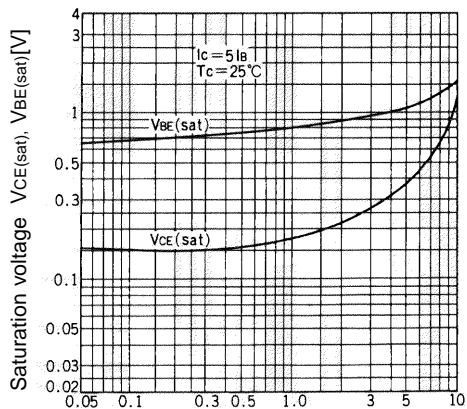

Base and Collector Saturation Voltage

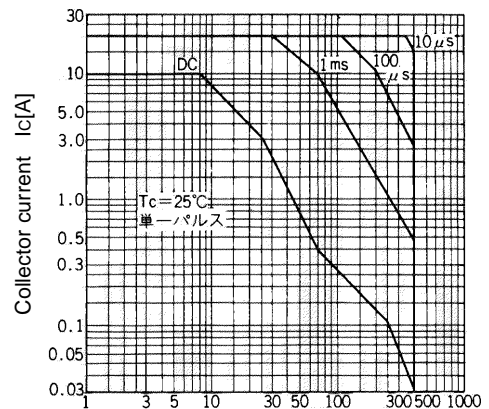

Safe Operating Area

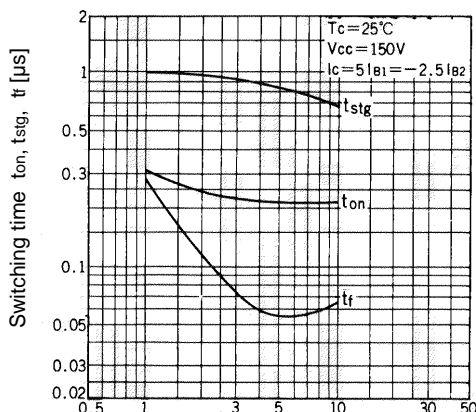

Switching Time

\*1 Switching Time Test Circuit

