

**GENERAL DESCRIPTION**

The S100-12 is designed for common emitter HF, SSB applications from a 12 volt supply. It may be operated Class A, AB or C. The device has emitter ballasting for ruggedness and reliability.


**S100-12**  
**100 WATTS - 12.5 VOLTS**  
**1.5-30 MHz**

**HF COMMUNICATIONS**

**ABSOLUTE MAXIMUM RATINGS**


Maximum Power Dissipation @ 25 C Case Temperature	250 W
<b>Maximum Voltage and Current</b>	
BVces Collector to Emitter Voltage	3.6 V
BVebo Emitter to Base Voltage	4.0 V
Ic Collector Current	50 A

<b>Maximum Temperatures</b>	
Storage Temperature	-65 to +150 °C
Operating Temperature	+200 °C

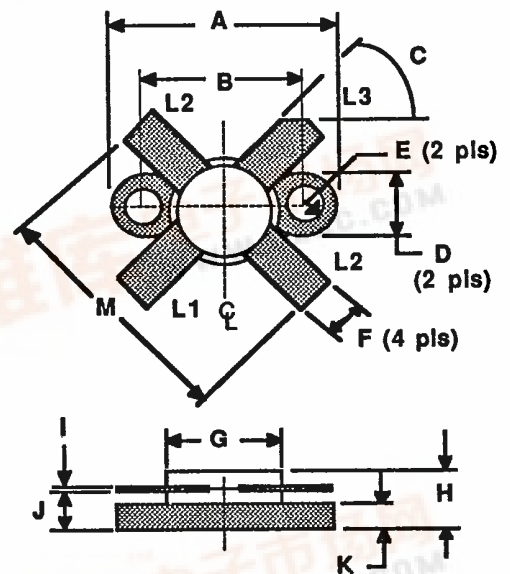


DIM	Millimeter	TOL	Inches	TOL	
L1 : B	A	24.76	.13	.975	.005
L2 : E	B	18.42	.13	.725	.005
L3 : C	C	45°	5°	45°	5°
	D	6.35	.13	.250	.005
	E	3.17 DIA	.13	.125 DIA	.005
	F	5.71	.13	.225	.005
	G	12.70 DIA	.13	.500 DIA	.005
	H	6.60	REF	.260	REF
	I	0.13	.02	.005	.001
	J	4.19	.13	.165	.005
	K	2.59	.13	.102	.005
	M	25.40	.25	1.000	.010

**POWER OUTPUT VS POWER INPUT (TYPICAL)**

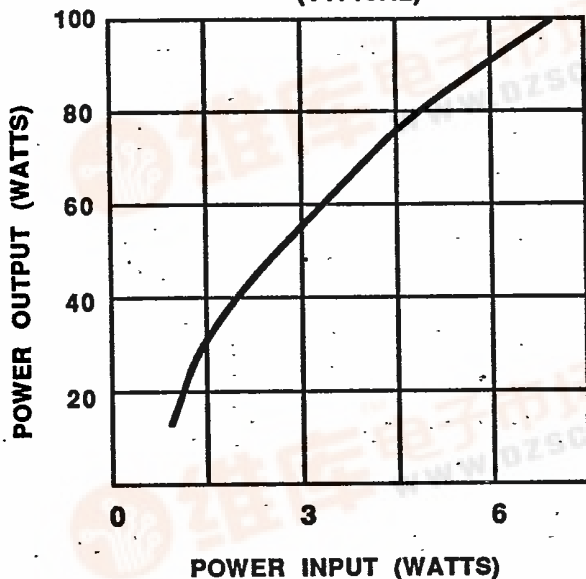

**TYPICAL AMPLIFIER LINE UP**

Vcc = 12.5 Volts  
 Frequency Range = 1.5-30 MHz

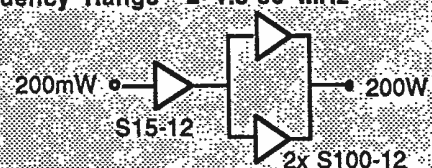


**S100-12-2**


**ELECTRICAL CHARACTERISTICS**

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Pout	Power Output	f= 1.5 - 30MHz	100			Watts
Pin	Power Input	At Rated Power Out, Vc=12.5V			8.5	Watts
Pg	Power Gain		10.7			dB
BVebo	Voltage - Emitter to Base	Ie= 10mA	3.5			Volts
BVces	Voltage - Collector to Base	Ic= 100mA	36			Volts
BVceo	Voltage - Collector to Emitter	Ic= 100mA	16			Volts
IMD	Intermodulation Distortion Level				-30	dBc
VSWR	Load Mismatch Tolerance				30:1	
$\eta_c$	Collector Efficiency	At Rated Power Out		65		%
Ices	Collector to Base Cutoff Current	Vcb=15V			50	mA
Ccb	Capacitance-Collector to Base	Vcb=12.5V, f=1MHz		400		pF
$h_{FE}$	DC-Current Gain	Vce=5V, Ic=1A	10			
$\theta_{jc}$	Thermal Resistance				0.7	$^{\circ}C/W$

**Icq VS Vbe (TYPICAL)**


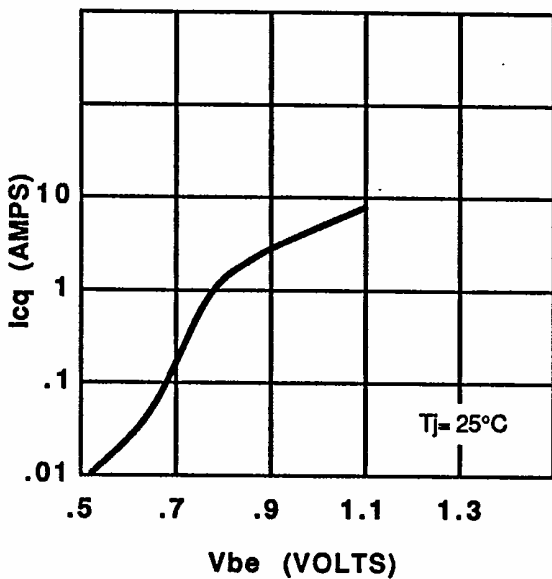


**DC SAFE OPERATING AREA (TYPICAL)**

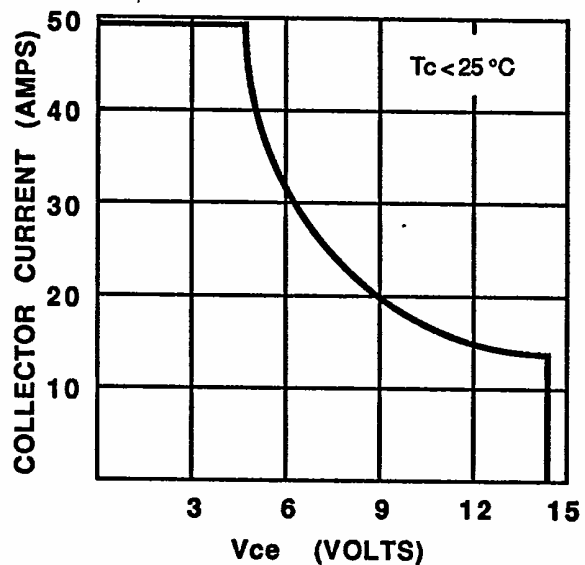

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE



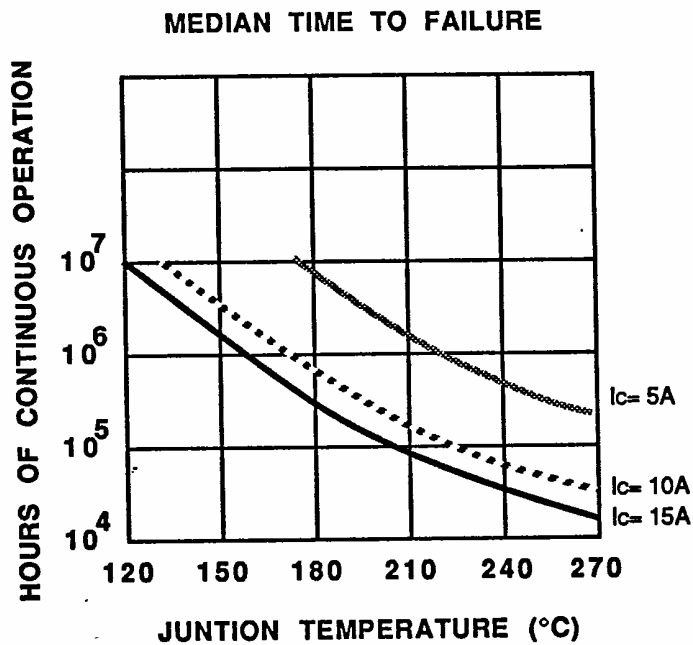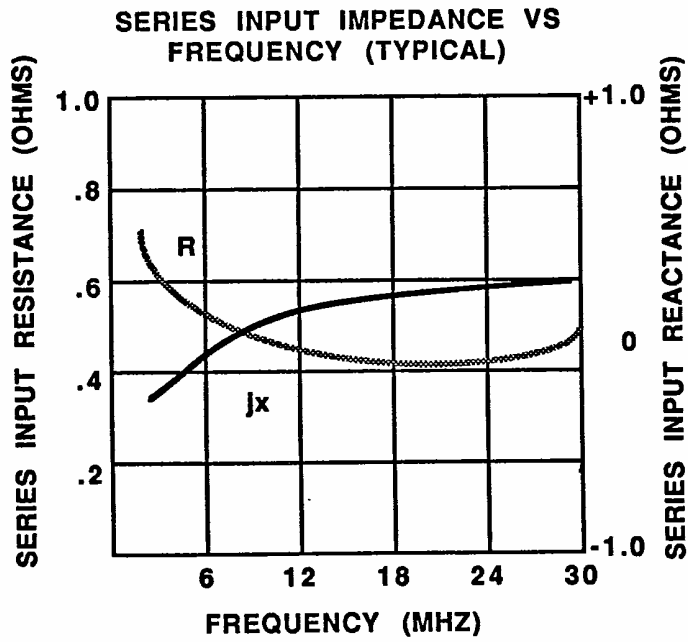

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE

