

THICK FILM ATTENUATORS, DIGITAL HIGH RELIABILITY

GENERAL INFORMATION: The DAP Series of Thick Film digital attenuators offers high reliability for operation up to 2 GHz. The plug-in style package offers a very reliable, easy to use and cost effective alternative. TTL driver circuits are integrated directly on the RF substrate. All circuits on hermetically sealed and meet the requirements of MIL-STD-883.

FEATURES:

- Thick Film
- Accuracy $\pm 1/2$ LSB
- Laser Trimmed
- Hermetically Sealed
- Internal TTL Drivers
- Plug In Style Package

GENERAL SPECIFICATIONS:

FREQUENCY RANGE: 20 MHz-2000 MHz

RF IMPEDANCE: 50 Ohms

DC POWER: 5V ± 0.5 V at 10ma/bit

LOGIC: T²L Compatible

DRIVER: Integrated on RF Substrate

ATTENUATION RANGE: To 31.5dB

RF POWER: +10dBm Operating
+20dBm Survivability

OPERATING TEMP.: -55°C. To +85°C.

STORAGE TEMP.: -55°C. To +125°C.

SWITCHING SPEED: 100 nsec Typ; 125 nsec Max.

(50% Logic to 90% RF).

For DAP0024 and DAP0025

max. switching speed is 2 μ sec.

PACKAGE: Plug-In Hermetic Seal per MIL-STD-883





PACKAGE MATERIAL: Gold Plated Kovar.

ACCURACY: $\pm 1/2$ LSB

39E D 5041502 0001193 1 KDIT
捷多邦, 专业PCB打样工厂, 24小时加急出货

DAP SERIES

20-2000 MHz

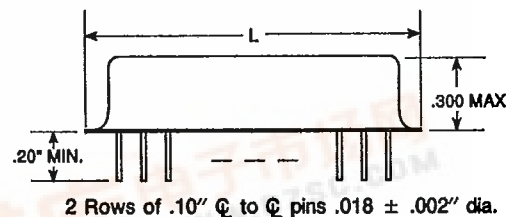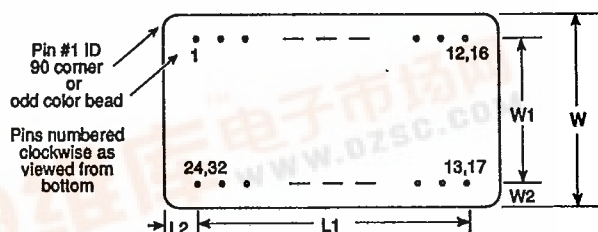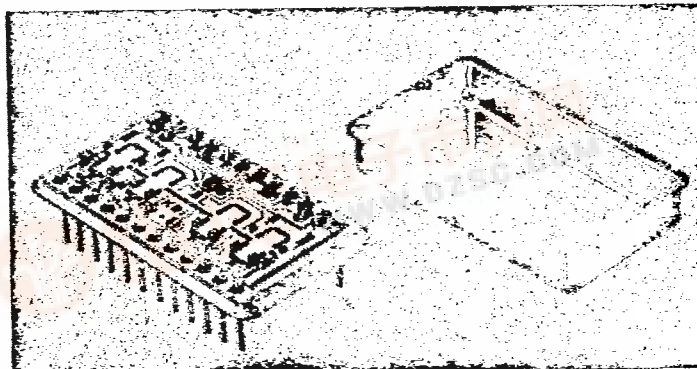

ELECTRICAL PERFORMANCE

Part No.	Frequency MHz	# of Bits	LSB dB	MSB Max. dB	Ins. Loss dB Max.	VSWR Max.	Power Supply mA Max.	Phase Degrees Typical	L	W	L1	W1	L2	W2	TOTAL PINS
DAP0024-**-	20-1000	4	0.5	8	4.0	2.0	40	10	1.37	.794	1.10	.60	.135	.10	24
DAP0025-**-	20-1000	5	0.5	16	5.0	2.0	50	10	1.74	1.14	1.50	.90	.12	.12	32
DAP0524-**-	500-2000	4	0.5	16	2.4	1.5	40	10	1.37	.794	1.10	.60	.135	.10	24
DAP0525-**-	750-1500	5	0.5	16	3.0	1.5	50	10	1.74	1.14	1.50	.90	.12	.12	32
DAP0526-**-	750-1500	6	0.5	16	3.6	1.5	60	15	1.74	1.14	1.50	.90	.12	.12	32

**Dash number indicates LSB value e.g.: 05 = 0.5 dB

DIMENSIONS

24 PIN LOGIC & RF CONNECTIONS

Model No.	1	3	5	8	10	13	24
DAP-0024-05	+5	4dB	.5dB	1dB	2dB	RF	RF
DAP-0024-1	+5	8dB	1dB	2dB	4dB	RF	RF
DAP-0524-05	+5	4dB	.5dB	1dB	2dB	RF	RF
DAP-0524-1	+5	8dB	1dB	2dB	4dB	RF	RF
DAP-0524-2	+5	16dB	2dB	4dB	8dB	RF	RF

32 PIN LOGIC & RF CONNECTIONS

Model No.	1	3	5	8	10	12	14	17	32
DAP-0025-05	+5	NC	.5dB	1dB	2dB	4dB	8dB	RF	RF
DAP-0025-1	+5	16dB	NC	1dB	2dB	4dB	8dB	RF	RF
DAP-0525-05	+5	NC	.5dB	1dB	2dB	4dB	8dB	RF	RF
DAP-0526-05	+5	16dB	.5dB	1dB	2dB	4dB	8dB	RF	RF
DAP-0525-1	+5	16dB	NC	1dB	2dB	4dB	8dB	RF	RF

NOTES: ALL OTHER PINS GROUNDED
LOGIC 1 = BIT ENABLED