查询4101-008供应商 捷多邦，专业PCB打样工厂，24小时加急出货

MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

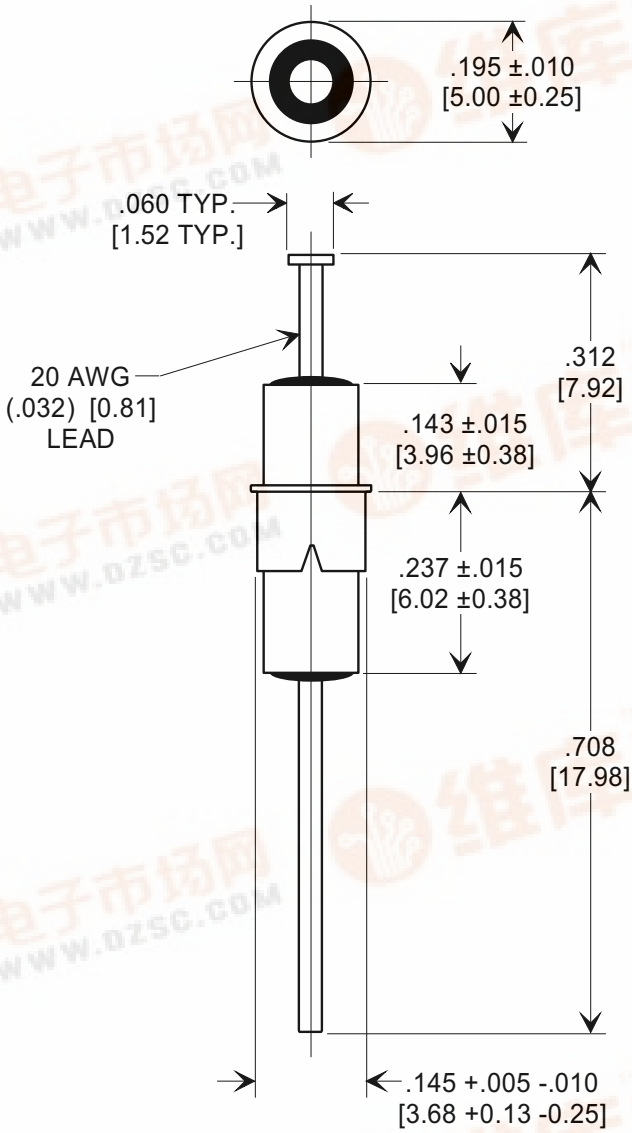

MIN. CAP (pF)	WORKING VOLTAGE (WVDC)		CURRENT Idc	MINIMUM NO-LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
	85°C	125°C		10 MHz	100 MHz	1 GHz	10 GHz
5500	200 VDC	200 VDC	10A	14	55	70	70

REVISION RECORD				
0	Original Release			
1	EDITORIAL +.005, -.010 10, 200 VDC WAS 140 T.C. 11-05-87			
2	6848-000-S ADDED S DIM. E.C. 11-23-87	WAS 4101-008-000-S. 21-88		
3			N TO COMP FMT. & ADDED TRIC. DIM .143 WAS .156 & .237 WAS .250. DELETED ASHERS. S.M. 01-19-00	000120-1-01
4				

--TOLERANCES--
Unless Otherwise Specified

DECIMAL ± .031 [.79]

ANGLES ±

TUSONIX

Title
EYELET STYLE EMI FILTER

Drawn S.M. 01-19-00

Scale 4 X

Approved T.C. 01-19-00

A 4101-008

找PDF pdf.dzsc.com