


586-936

© COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.



NOTE:
1. WIRE INSULATION DIA 2.67 [0.105] TO 3.81 [0.150]

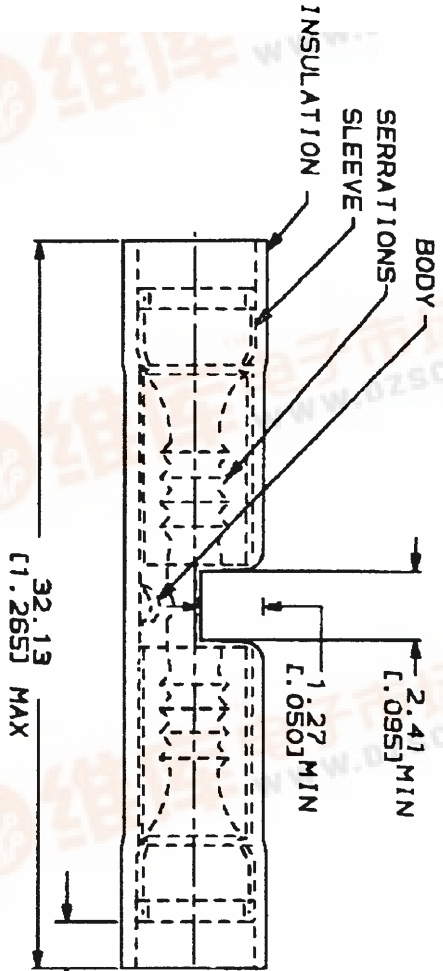

AMP WIRE RANGE	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED
AMP FILE E13298			
AMP L7198			

6	14	2000	L	REV / 0720-0380-94	DESCRIPTION	DATE	APP'D
						E/1/94	J HE

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS FOR APPLICATION	PRODUCT INFORMATION CENTER 1-800-522-8752 TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: 1000 V MAX CIRCULAR MIL AREA: 1.04-2.62 mm ² (0.50-5.160)
FOR ORDER ENTRY	1-800-526-5142	SOLID OR STRANDED

DO NOT SCALE PRINT. DIMENSIONS ON DRAWING TAKE PRECEDENCE OVER DIMENSIONS ON PART.	100	LOOSE PIECE, BOX	B-320562-5
	5	LOOSE PIECE, BLS	B-320562-4
	50	LOOSE PIECE, BOX	B-320562-2
	2500	ON TAPE	2-320562-3
	50	LOOSE PIECE	320562
MILITARY PART NUMBER & CLASS PER MIL-T-7928		PACKAGE TYPE	PART NO
H7928/5-4 CLASS 1 & 2			
H7928/5-4 CLASS 2			

AMP 16-14 AWG 2-20 10.05.15 AMP12368 <DU28U>DEP71132U,DWG1152U,8BYU,P106-SPLICEU,CUST
THIS DRAWING IS A CONTROLLED DOCUMENT AND IS THE PROPERTY OF AMP INCORPORATED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE AND THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE LATEST REVISION.
CUSTOMER DRAWING

