



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# 1SS265

## Features

- Low Differential Forward Resistance
- Low Diode Capacitance
- High Reverse Impedance
- Marking : Cathode band and type number

## 150mW 35 Volt Band Switching Diode


## Maximum Ratings

- Junction Temperature: 150°C
- Storage Temperature: -55°C to +150°C

DO-34

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Reverse Voltage	$V_R$	35V	
Breakdown Voltage	$B_V$	35V	$I_R=10 \mu A$
Average Rectified Current	$I_O$	100mA	
Power Dissipation	$P_d$	150mW	
Junction Ambient	$R_{thJA}$	350K/W	$l=4mm, T_L=constant$
Maximum Instantaneous Forward Voltage	$V_F$	0.85V	$I_{FM} = 10mA;$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	100nA	$V_R=20Volts$
Maximum Junction Capacitance	$C_t$	1.5pF	Measured at 1.0MHz, $V_R=6V$
Frequency Resistance	$r_f$	0.6Ω	$I_F=10mA$ $f=100MHz$

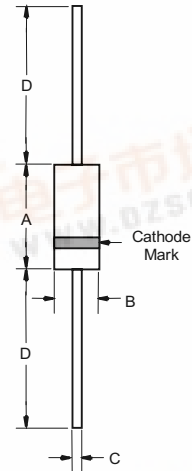

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.094	.118	2.40	3.00	
B	.063	.079	1.60	2.00	
C	.012	.020	0.30	0.50	
D	1.102	1.181	28.00	30.00	





TM

Micro Commercial Components

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.