

[查询BL1117供应商](#)

## Outline:

BL1117 is a series of low dropout three-terminal regulators with a dropout of 1.2V at 1A load current.

Other than a fixed version ( $V_{out}=1.8V, 2.5V, 2.85V, 3.3V, 5V$ ) , BL1117 has an adjustable version, which can provide an output voltage from 1.25 to 13.8V with only two external resistors.

BL1117 offers thermal shut down and current limit functions, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within  $\pm 1\%$ .

BL1117 is available in SOT-223,TO-252 and TO-220 power package.

## Selection Guide:

BL1117-XX X X

Package Type:

X: SOT-223

Y: TO-252

Z: TO-220

Temp. Range & Rohs Std.:

C: 140C & Pb-free Rhos Std

Z: 140C & Pb/Sn Plating

Output Voltage:

18 1.8V

25 2.5V

28 2.85V

50 5.0V

Default: Adjustable Version

[捷多邦，专业PCB打样工厂，24小时加急出货](#)

# BL1117

## 1A Low Dropout Voltage Regulator


### Features:

- Other than a fixed version and an adjustable version, output value can be customized on command.
- Maximum output current is 1A
- Output voltage accuracy is within  $\pm 1\%$
- Range of operation input voltage: Max 15V
- Line regulation: 0.2%
- Load regulation: 0.4%
- Environment Temperature: -50°C~140°C

### Applications:

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

### Pin Configuration:

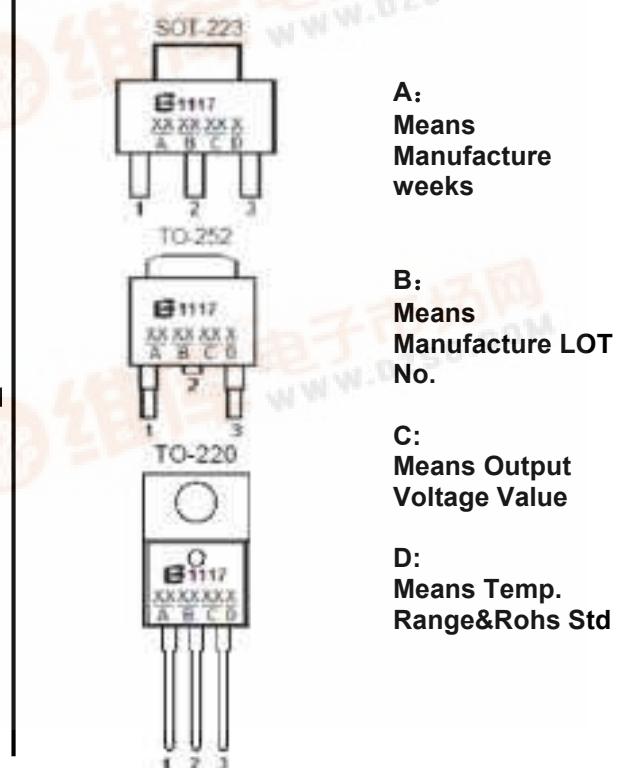

**Pin Description:**
**Fixed Version**


Pin No.	Symbol	Definition
1	GND	Ground
2	Vout	Output
3	Vin	Input

**Adjustable Version**

Pin No.	Symbol	Definition
1	Adj.	Adjustable
2	Vout	Output
3	Vin	Input

**Ordering Information:**

Package Marking	Output Voltage	Package Type
BL1117-18CX	1.8 V	SOT-223
BL1117-25CX	2.5 V	SOT-223
BL1117-28CX	2.85V	SOT-223
BL1117-33CX	3.3 V	SOT-223
BL1117-50CX	5.0V	SOT-223
BL1117-CX	Adj.	SOT-223
BL1117-18CY	1.8 V	TO-252
BL1117-25CY	2.5 V	TO-252
BL1117-28CY	2.85V	TO-252
BL1117-33CY	3.3 V	TO-252
BL1117-50CY	5.0V	TO-252
BL1117-CY	Adj.	TO-252
BL1117-18CZ	1.8 V	TO-220
BL1117-25CZ	2.5 V	TO-220
BL1117-28CZ	2.85V	TO-220
BL1117-33CZ	3.3 V	TO-220
BL1117-50CZ	5.0V	TO-220
BL1117-CZ	Adj.	TO-220

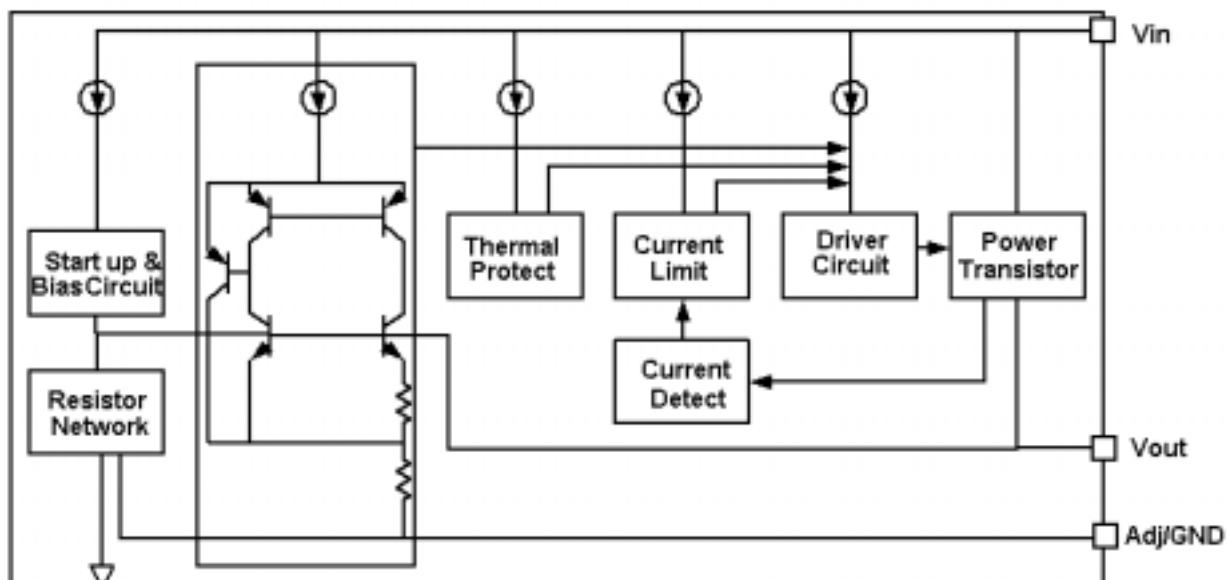**Block Diagrams:**


**Absolute Maximum Ratings:**

Maximum Input Voltage	18V
Junction Temperature ( $T_J$ )	150°C
Environment Temperature ( $T_A$ )	140°C
Storage Temperature ( $T_S$ )	-65~150°C
Lead Temperature and Time	260°C, 10S

**Recommended Work Conditions:**

Item	Min	Recommended	Max	Unit
Input Voltage Range		15	V	
Environment Temperature	-50	140	°C	

**Electrical Characteristics (Table 1):**

Tj=25°C

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Vref	Reference Voltage	Iout=10mA, Vin-Vout=2V 10mA≤Iout≤1A, 1.5V≤Vin-Vout≤12V	1.238 1.225	1.25 1.25	1.262 1.275	V
Vout	Output Voltage	BL1117-1.80V Iout=10mA, Vin=3.8V, Tj=25°C 0≤Iout≤1A, 3.2V≤Vin≤12V	1.782 1.764	1.80 1.80	1.818 1.836	V
		BL1117-2.5V Iout=10mA, Vin=4.5V, Tj=25°C 0≤Iout≤1A, 3.9V≤Vin≤12V	2.475 2.45	2.5 2.5	2.525 2.55	V
		BL1117-2.85V Iout=10mA, Vin=4.85V, Tj=25°C 0≤Iout≤1A, 4.25V≤Vin≤12V	2.822 2.793	2.85 2.85	2.878 2.907	V
		BL1117-3.3V Iout=10mA, Vin=5V, Tj=25°C 0≤Iout≤1A, 4.75V≤Vin≤12V	3.267 3.234	3.3 3.3	3.333 3.366	V
		BL1117-5V Iout=10mA, Vin=7V, Tj=25°C 0≤Iout≤1A, 6.5V≤Vin≤12V	4.95 4.9	5 5	5.05 5.1	V
ΔVout	Line Regulation (note1)	BL1117-ADJ Iout=10mA, 1.5V≤Vin-Vout≤13.775V		0.035	0.2	%
		BL1117-1.8V Iout=10mA, 3.2V≤Vin≤15V		9	12	mV
		BL1117-2.5V Iout=10mA, 3.9V≤Vin≤15V		9	12	mV
		BL1117-2.85V Iout=10mA, 4.25V≤Vin≤15V		9	12	mV

		BL1117-3.3V Iout=10mA, 4.75V ≤ Vin ≤ 15V	9	12	mV	
		BL1117-5V Iout=10mA, 6.5V ≤ Vin ≤ 15V	9	12	mV	
ΔVout	Load Regulation (note1, 2)	BL1117-ADJ Vin-Vout=3V, 10mA ≤ Iout ≤ 1A	0.2	0.4	%	
		BL1117-1.8V Vin=3.2V, 0 ≤ Iout ≤ 1A	3	10	mV	
		BL1117-2.5V Vin=3.9V, 0 ≤ Iout ≤ 1A	3	10	mV	
		BL1117-2.85V Vin=4.25V, 0 ≤ Iout ≤ 1A	3	10	mV	
		BL1117-3.3V Vin=4.75V, 0 ≤ Iout ≤ 1A	3	10	mV	
		BL1117-5V Vin=6.5V, 0 ≤ Iout ≤ 1A	3	10	mV	
Vin-Vout	Dropout Voltage (note3)	ΔVout, ΔVref = 1%, Iout=100mA	1.11	1.2	V	
		ΔVout, ΔVref,=1%, Iout=500mA	1.18	1.25	V	
		ΔVout, ΔVref,=1%, Iout=1A	1.26	1.3	V	
Ilimit	Current Limit	Vin-Vout=2V, Tj=25°C	1.25	1.4	1.6	A
	Minimum Load Current (note4)	BL1117-ADJ	5	10	mA	
Iq	Quiescent Current	BL1117-1.8V, Vin-Vout=1.25V	4	8	mA	
		BL1117-2.5V, Vin-Vout=1.25V	4	8	mA	

		BL1117-2.85V, Vin-Vout=1.25V		4	8	mA
		BL1117-3.3V, Vin-Vout=1.25V		4	8	mA
		BL1117-5V, Vin-Vout=1.25V		4	8	mA
IAdj	Adjust Pin Current (Adjustable Version)			55	120	uA
Ichange	Adjust Pin Current Change			0.2		uA
	Temperature Stability				0.5	%
θ JC	Thermal Resistor	SOT-223		20		°C / W
		TO-252		10		
		TO-220		4.5		

**Note:**

Note1: The Parameters of Line Regulation and Load Regulation in Table1 are tested under constant junction temperature. The Curve of Load Regulation vs. Temperature is shown in typical parameter curve that follows.

Note2: When Iout varies between 0~1A, Vin-Vout varies between 1.5V~12V under constant junction temperature, the parameter is satisfied the criterion in table. If temperature varies between  $-50^{\circ}\text{C} \leq T_{\text{A}} \leq 140^{\circ}\text{C}$ , it needs output current to be larger than 10mA to satisfy the criterion.

Note3: Dropout Voltage is specified over the full output current range of the device, and it is tested under following testing conditions: First step is to find out the Vout value(Vout1) when  $V_{\text{in}1}=V_{\text{out}}+1.5\text{V}$ , second step is to decrease  $V_{\text{in}}$ (Vin2) until Vout value is equal to  $99\% \times V_{\text{out}1}$ (Vout2).  $V_{\text{dropout}}=V_{\text{in}2}-V_{\text{out}2}$ .

Note4: Minimum Load Current is defined as the minimum output current required to maintain regulation. When  $1.5\text{V} \leq V_{\text{in}}-V_{\text{out}} \leq 12\text{V}$ , the device is guaranteed to regulate if the output current is greater than 10mA.

**Detailed Description:**

BL1117 is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, current limit, power transistors and its driver circuit and so on.

The thermal shut down and current limit modules can assure chip and its application system working safety when the junction temperature is larger than  $140^{\circ}\text{C}$  or output current is larger than 1.4A.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique,

### Typical Application :

BL1117 has an adjustable version and five fixed versions, Chart1 is its typical application:

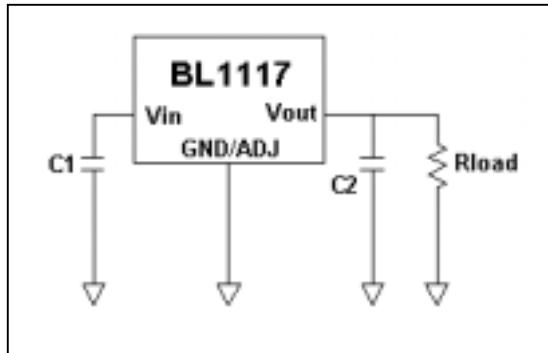


Chart 1: Application circuit of BL1117 fixed version

### Application Hints:

1. Recommend using 10uF tan capacitor as bypass capacitor(C1) for all application circuit.
2. Recommend using 22uF tan capacitor to assure circuit stability.
3. Using a bypass capacitor(CAdj) between the adjust terminal and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of CAdj should be less than the resistor's(R1) which is between output and adjust pins to prevent ripple from being amplified at any ripple frequency. As R1 is normally in the range of  $200\Omega \sim 350\Omega$ , the value of CAdj should satisfy this equation:  $2 \cdot \text{Fripple} \cdot \text{CAdj} < \text{R1}$ . Recommend using 10uF tan capacitor.

### Output Voltage of Adjustable Version:

The BL1117 adjustable version provide 1.25V Reference Voltage. Any output voltage between 1.25V~13.8V can be available by choosing two external resistors (connection method is shown in chart 2). In chart 2, R1,R2 is the two external resistors

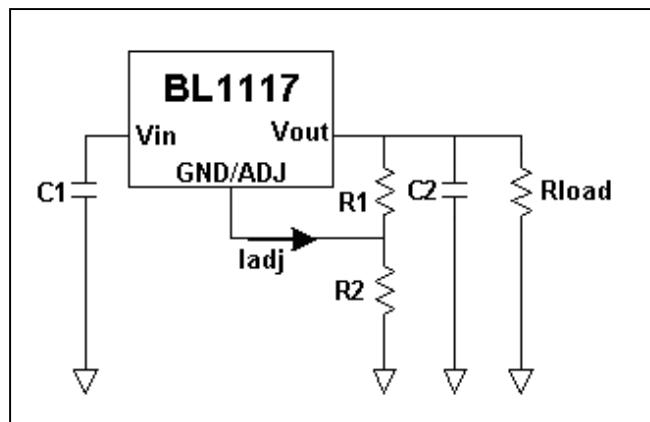


Chart 2. Application Circuit of BL1117 adjustable version



### Explanation :

The output voltage of adjustable version satisfies this followed equation:  
 $V_{Out}=V_{Ref}*(1+R2/R1)+I_{Adj}*R2$ . We can ignore  $I_{Adj}$  because  $I_{Adj}$ (about 50uA) is much less than the current of R1(about 4mA).


How to choose R1: The value of R1 should be in the range of  $200\Omega \sim 350\Omega$  to assure chip working normally without any load. To assure the electrical performance showed in table 1, the output current should be larger than 5mA. If R1 is too large, the minimum output current should be larger than 4mA , The best working condition is to assure that the output current exceeds 10mA.

### Thermal Considerations:


We have to take heat dissipation into consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by BL1117 is very large. BL1117 series uses SOT-223 package type and its thermal resistance is about  $20^{\circ}\text{C}/\text{W}$ . And the copper area of application board can affect the total thermal resistance. If copper area is  $5\text{cm} \times 5\text{cm}$  (two sides) , the resistance is about  $30^{\circ}\text{C}/\text{W}$ . So total thermal resistance is about  $20^{\circ}\text{C}/\text{W}+30^{\circ}\text{C}/\text{W}$ . We can decrease total thermal resistance by increasing copper area in application board.

## Typical Characteristics:


1.BL1117 Dropout Voltage

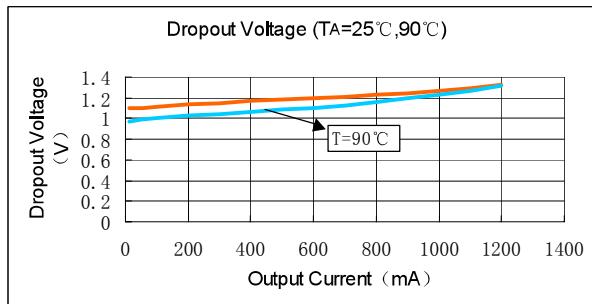


2.BL1117 Line Regulation

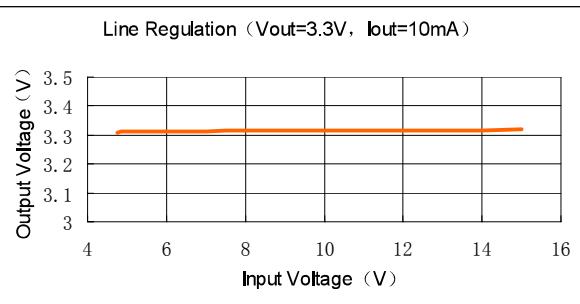


3.BL1117 Load Regulation

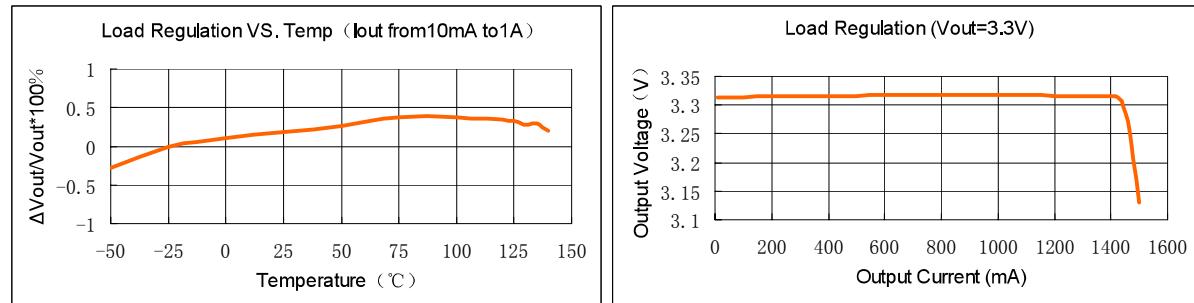


4.BL1117 Temperature Stability

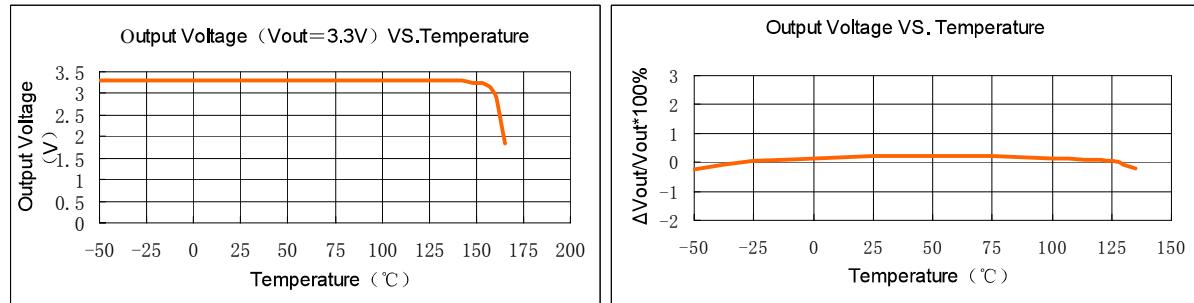

5.BL1117 Adj Pin Current VS. Temperature

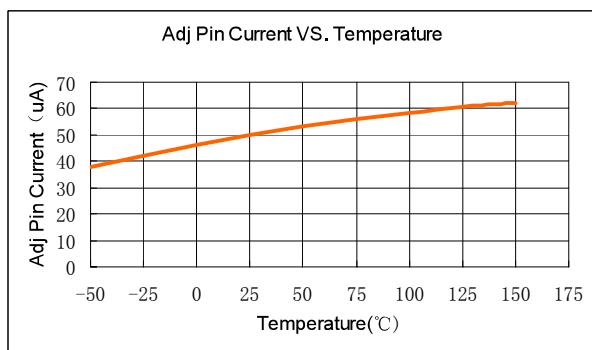

6.BL1117 Load Transient Response

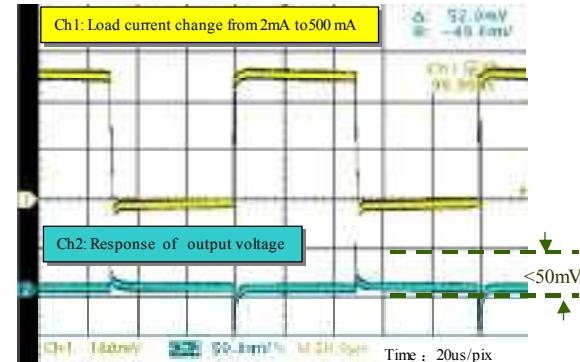


Package outline:


**1.SOT-223**

Package	SOT-223	Devices per reel	1000	Unit	mm
---------	---------	------------------	------	------	----


Package specification:

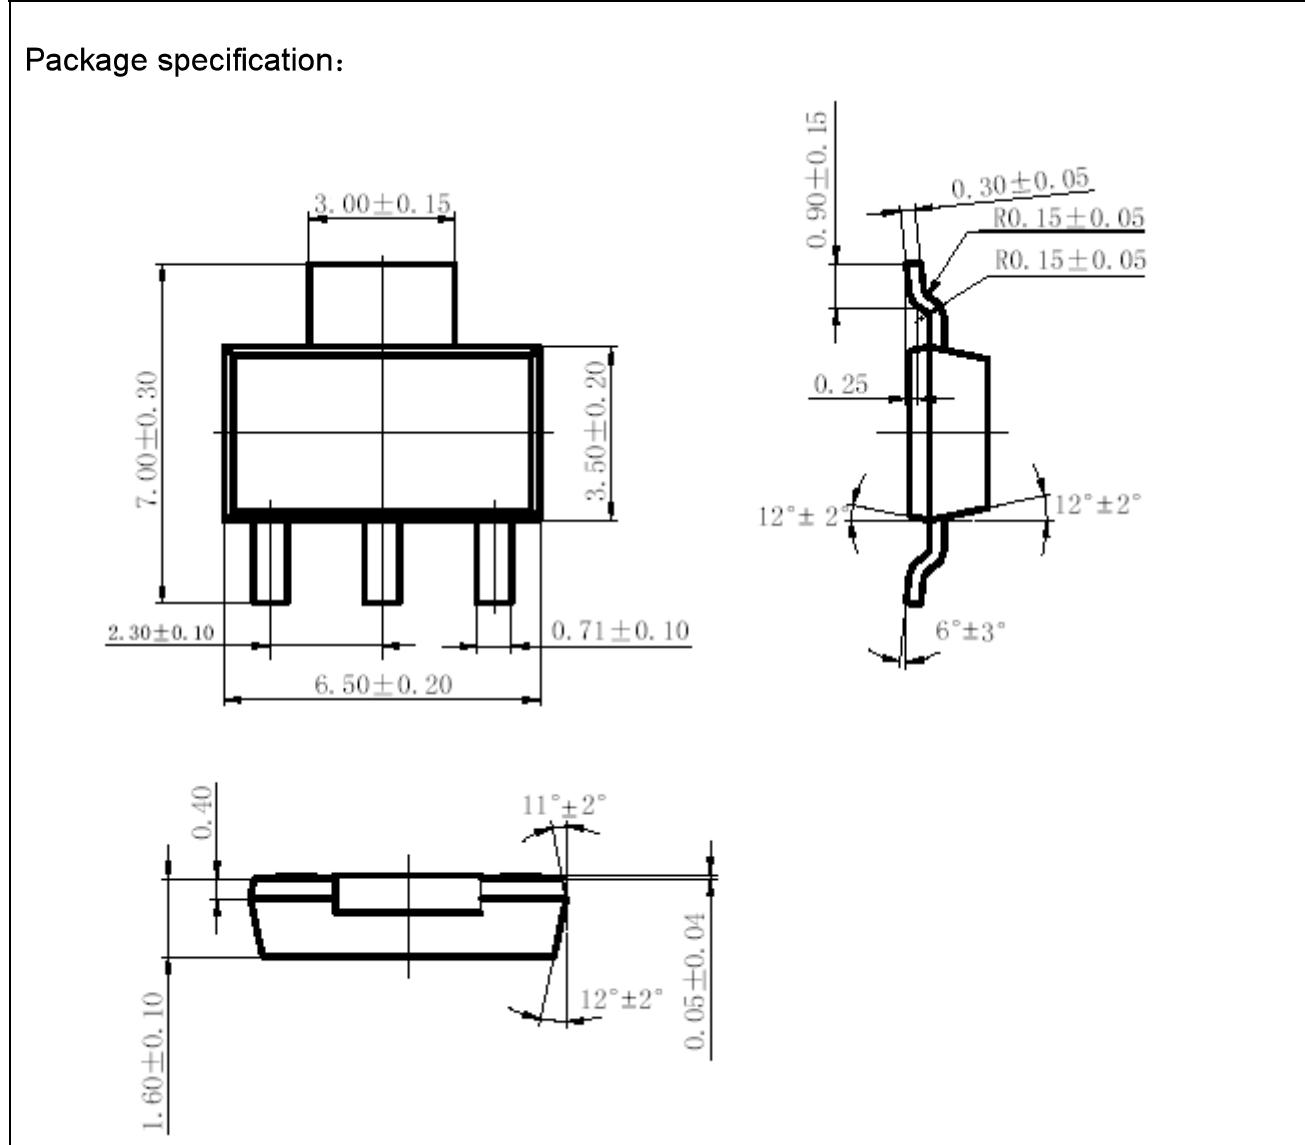






Taping dimension: (M1: Standard Type , M2: Customized)

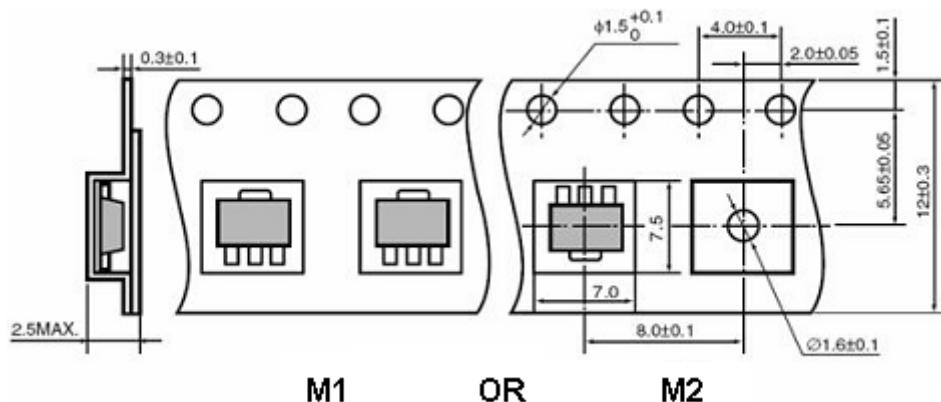


Taping reel dimension:

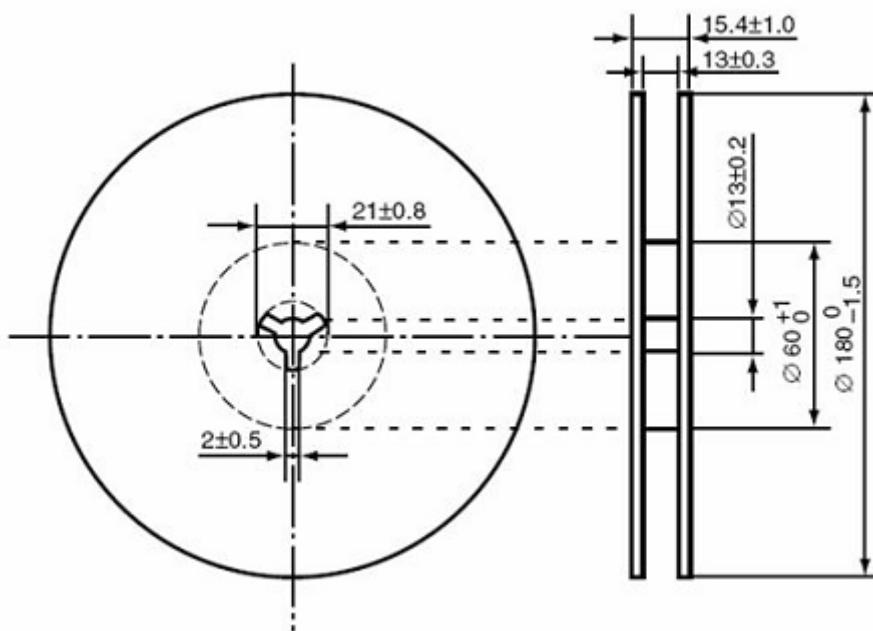

**2.TO-252**

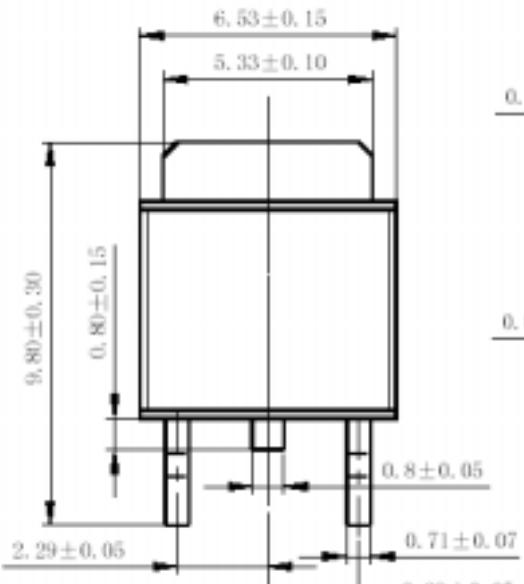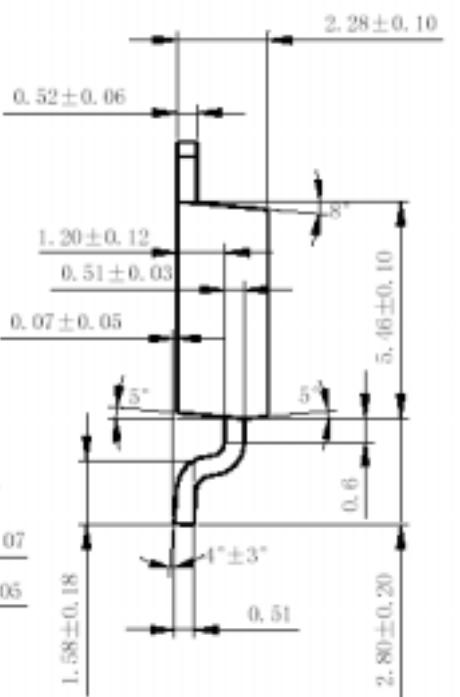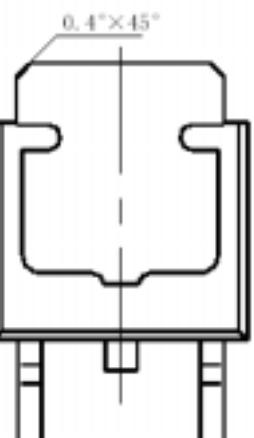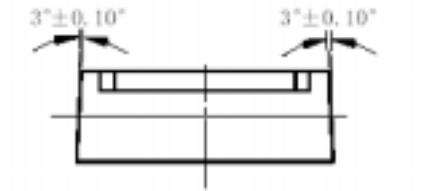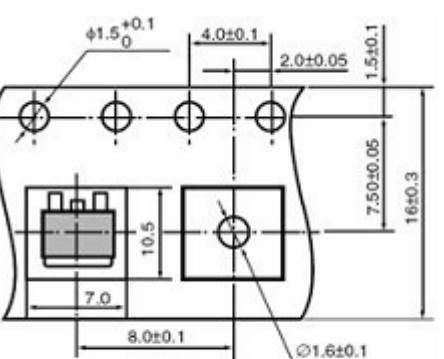
Package	TO-252	Devices per reel	2500	Unit	mm
<b>Package specification:</b>					
					
<b>Taping dimension:</b> (M1: Standard Type , M2: Customized)					
					

Taping reel dimension:

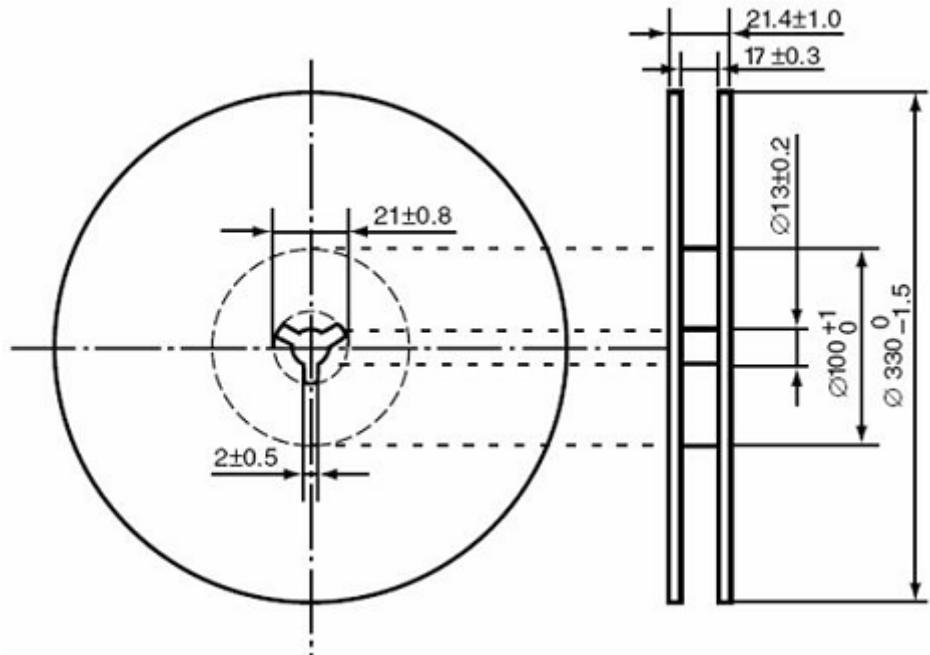
**3.TO-220**

Package	TO-220	Devices per tube	50	Unit	mm
---------	--------	------------------	----	------	----

Package specification:

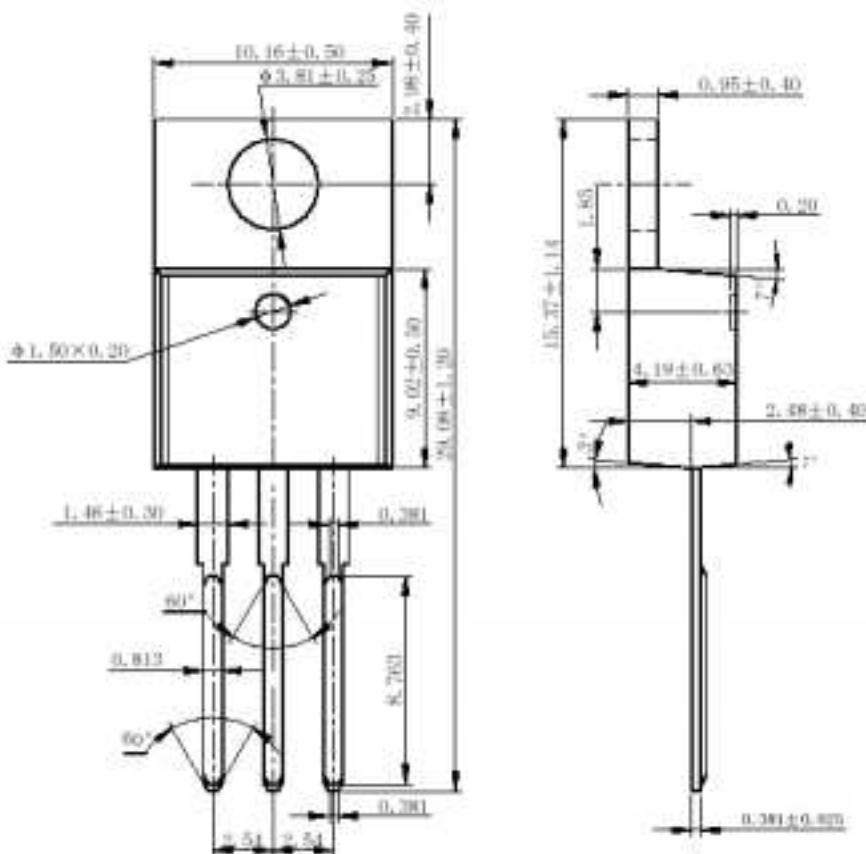

**Tube dimension:**

