



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MP2505W THRU MP2510W

Features

- Mounting Hole For #8 Screw
- Plastic Case with Metal Bottom
- Any Mounting Position
- Surge Rating Of 300 Amps
- Case to Terminal Isolation Voltage 2500V
- UL Recognized File # E165989

Maximum Ratings

- Mounting Torque: 2.0 N·m, Tolerance: +/-10%
- Mounting: Hole for #6 Screw
- Operating Temperature: -55°C to +125°C
- Storage Temperature: -55°C to +150°C

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MP2505W	MP2505W	50V	35V	50V
MP251W	MP251W	100V	70V	100V
MP252W	MP252W	200V	140V	200V
MP254W	MP254W	400V	280V	400V
MP256W	MP256W	600V	420V	600V
MP258W	MP258W	800V	560V	800V
MP2510W	MP2510W	1000V	700V	1000V


Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	25.0A	$T_C = 55^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	300A	8.3ms, half sine
Maximum Forward Voltage Drop Per Element	V_F	1.1V	$I_{FM} = 12.5\text{A}$ per element; $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5 μA 500 μA	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 1%

25 Amp Single Phase Bridge Rectifier 50 to 1000 Volts

MP-50W

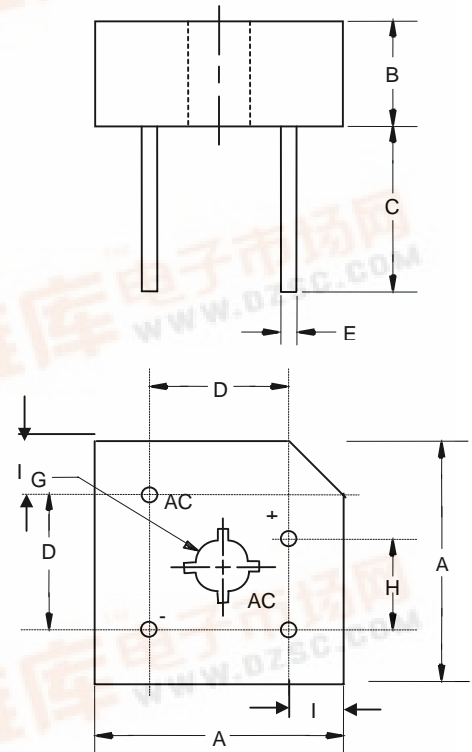


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	1.118	1.130	28.40	28.70	
B	.432	.442	10.97	11.23	
C	.769	---	19.53	---	
D	.673	.752	17.10	19.10	
E	.038	.042	.97	1.07	4PL/TYP
G	.193	---	4.90	---	\varnothing
H	.429	.468	10.90	11.90	
I	.169	.236	4.30	6.00	




MP2505W thru MP2510W

Figure 1
Typical Forward Characteristics

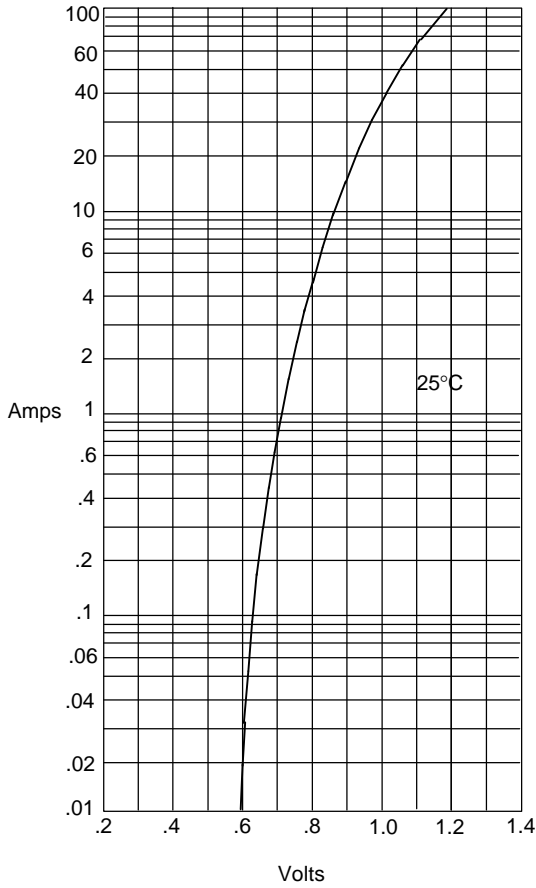


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

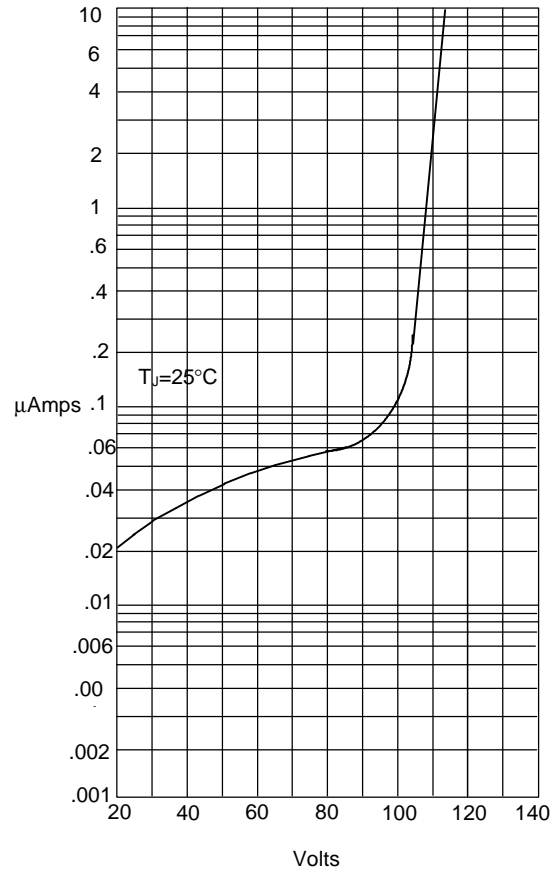


Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

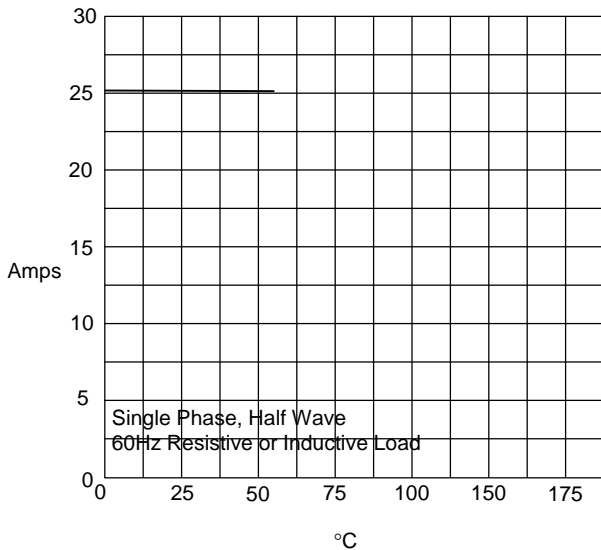

Average Forward Rectified Current - Amperes versus
Case Temperature - °C

Figure 4
Peak Forward Surge Current

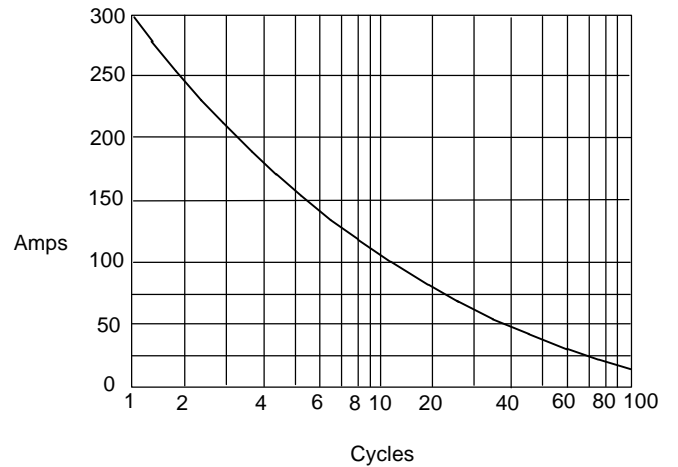

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles