

Descriptions

- Three Terminal Positive Low Dropout Voltage Regulator

Features


- Low Standby Current Consumption (500 μ A Typ.)
- Maximum Output Current (150 mA Max.)
- Less I/O voltage Difference (0.7V Max.)

Ordering Information

Type NO.	Marking	Package Code
S78DL05	S78DL05	TO-92

Outline Dimensions

unit : mm

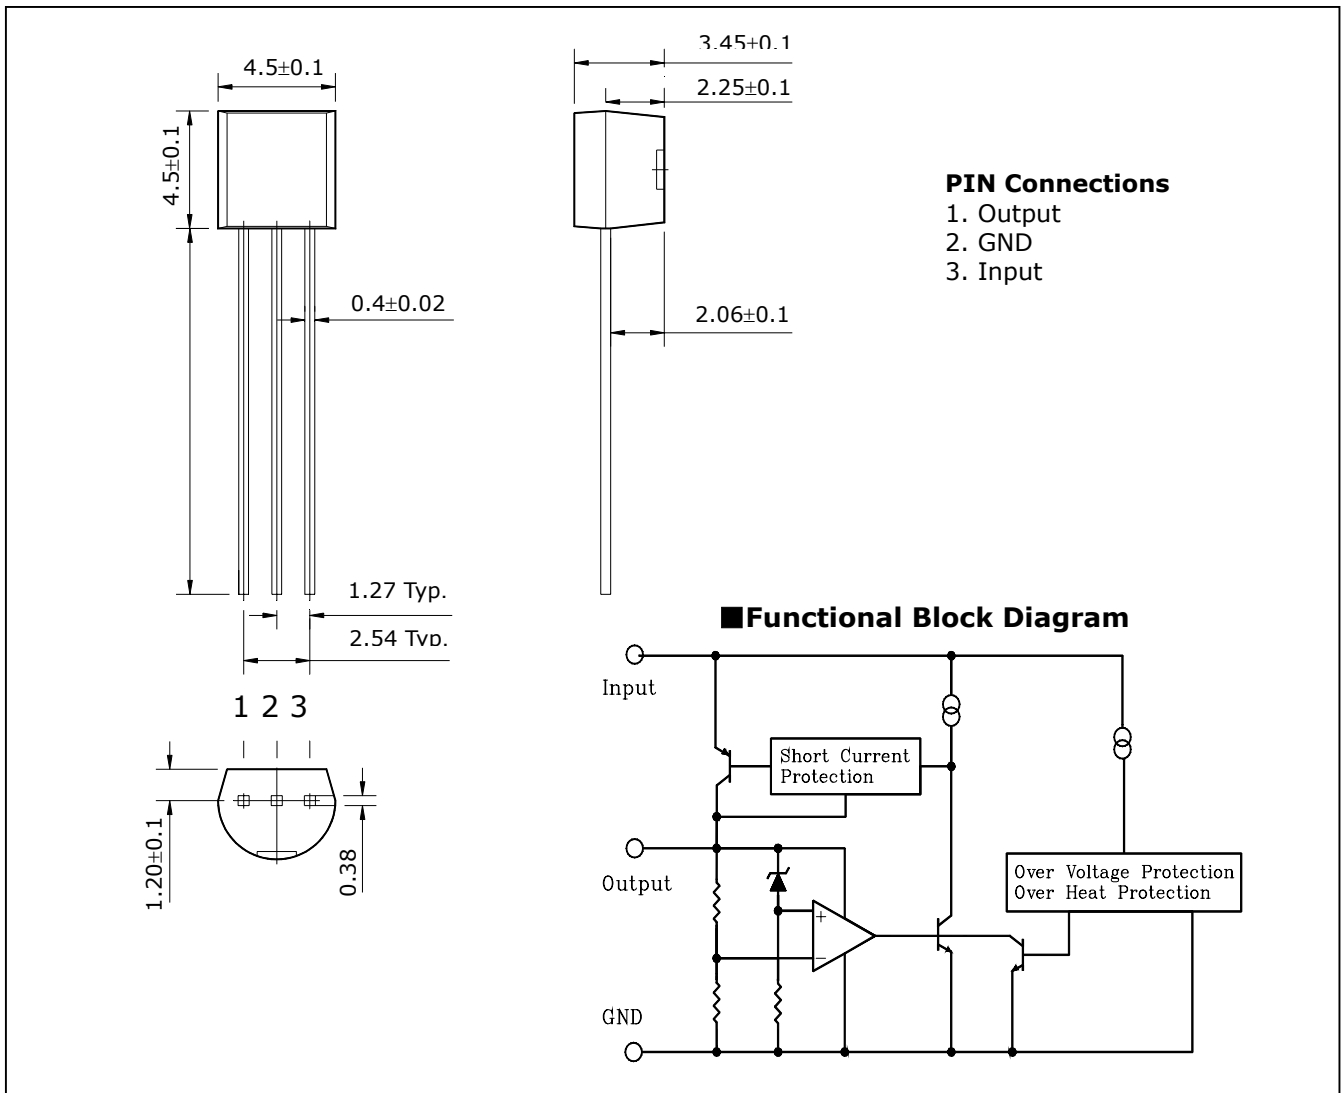


Maximum ratings

Ta=25°C

Characteristic	Symbol	Ratings	Unit
Operating Input voltage	V_{IN}	20	V
Power Dissipation	P_D	625	mW
Operating Temperature Range	T_{OPR}	-40~+85	°C
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C
Lead Temperature Time	T_{sol}	260 (10 Sec)	°C

Electrical Characteristics(※ $V_{IN}=10V$, $I_{OUT}=10\text{ mA}$, $T_j=25^\circ\text{C}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output voltage	V_{OUT}	$V_{IN}=5.35V\sim 20V$, $T_a=-40\sim 85^\circ\text{C}$	4.8	5	5.2	V
Voltage Regulation	$\Delta V_{OUT}(1)$	$V_{IN}=6V\sim 16V$	-	10	30	mV
Load Regulation	$\Delta V_{OUT}(2)$	$I_{OUT}=10\sim 100\text{mA}$	-	12	50	mV
Quiescent Current	I_{CC}	$I_{OUT}\leq 10\text{mA}$, $V_{IN}=6V\sim 20V$	-	0.5	1	mA
Dropout Voltage	V_{DROPP}	$I_{OUT}=50\text{mA}$	-	0.3	0.5	V
		$I_{OUT}=100\text{mA}$	-	0.5	0.7	
Maximum Operating Input Voltage	V_{IN}		20	29	-	V

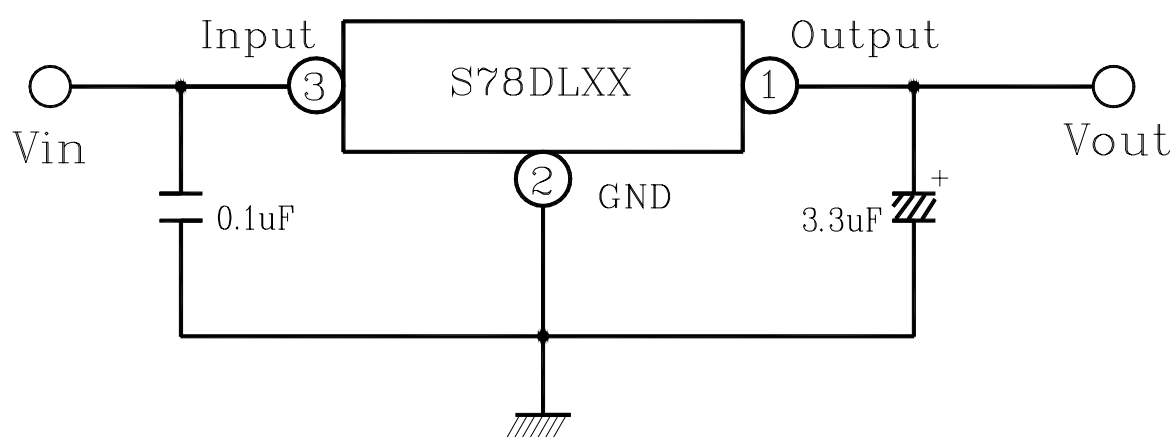■ Test circuit

Electrical Characteristic Curves

Fig. 1. $V_{in} - V_{out}$

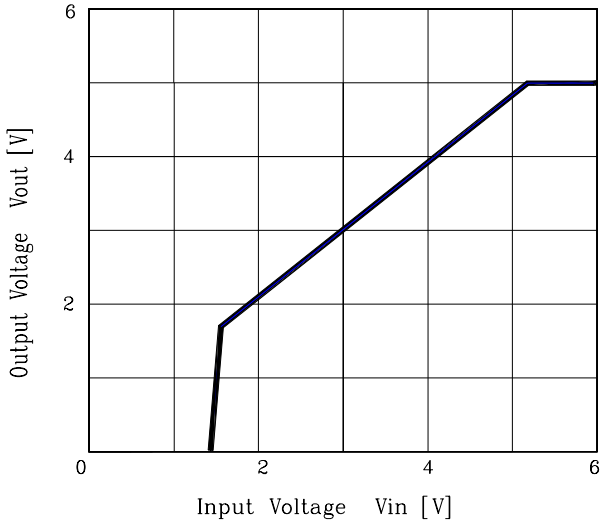


Fig. 2. $|V_{out} - V_{in}| - I_C$

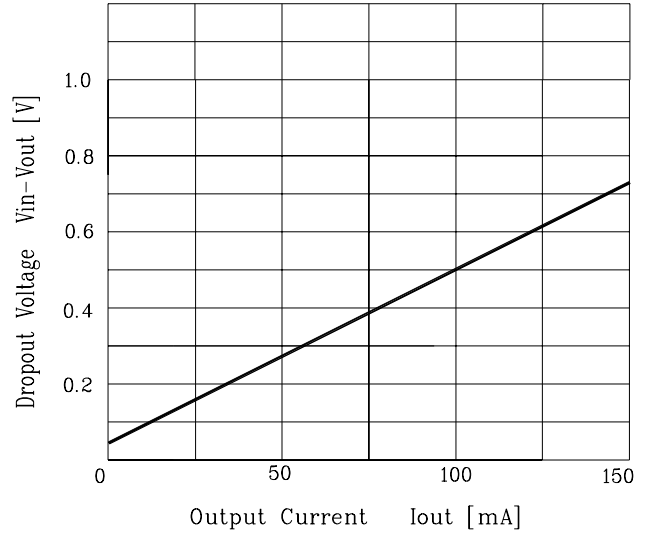


Fig. 3. $P_d - T_a$

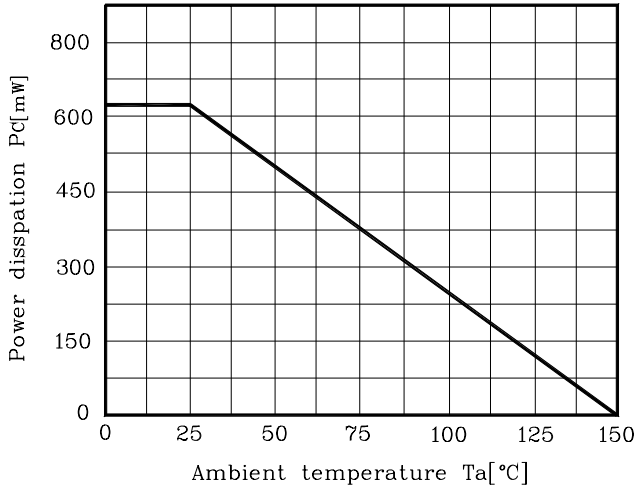


Fig. 4. $I_{cc} - V_{out}$

