

TOSHIBA

2SA1891

TOSHIBA TRANSISTOR SILICON PNP EPITAXIAL TYPE (PCT PROCESS)

2SA1891

POWER AMPLIFIER APPLICATIONS


POWER SWITCHING APPLICATIONS

- Low Collector Saturation Voltage
: $V_{CE(sat)} = -0.5V$ (Max.) ($I_C = -1A$)
- High Collector Power Dissipation : $P_C = 1.3W$ ($T_a = 25^\circ C$)
- High Speed Switching Time : $t_{stg} = 300ns$ (Typ.)
- Complementary to 2SC5028

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-6	V
Collector Current	I_C	-2	A
Base Current	I_B	-0.2	A
Collector Power Dissipation	P_C	1.3	W
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55~150	$^\circ C$

Unit in mm

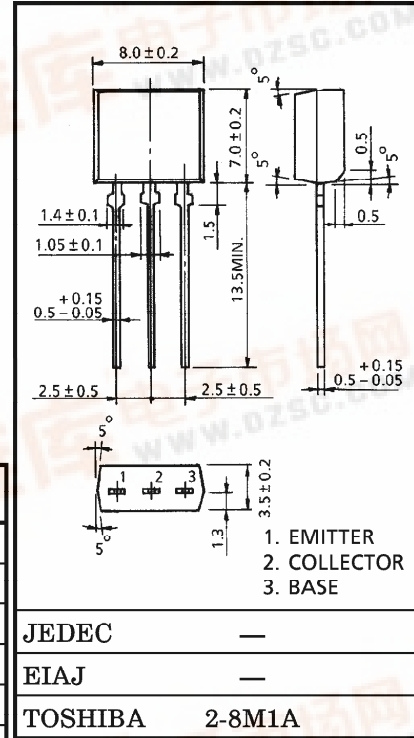

Weight : 0.55g

961001FAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

● The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

● The information contained herein is subject to change without notice.



ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT				
Collector Cut-off Current	ICBO	V _{CB} = -60V, I _E = 0	—	—	-1.0	μA				
Emitter Cut-off Current	IEBO	V _{EB} = -6V, I _C = 0	—	—	-1.0	μA				
Collector-Emitter Breakdown Voltage	V _{(BR) CEO}	I _C = -10mA, I _B = 0	-50	—	—	V				
DC Current Gain	h _{FE} (1)	V _{CE} = -2V, I _C = -100mA	120	—	400					
	h _{FE} (2)	V _{CE} = -2V, I _C = -1.5A	40	—	—					
Collector-Emitter Saturation Voltage	V _{CE (sat)}	I _C = -1A, I _B = -0.05A	—	—	-0.5	V				
Base-Emitter Saturation Voltage	V _{BE (sat)}	I _C = -1A, I _B = -0.05A	—	—	-1.2	V				
Transition Frequency	f _T	V _{CE} = -2V, I _C = -100mA	—	100	—	MHz				
Collector Output Capacitance	C _{ob}	V _{CB} = -10V, I _E = 0, f = 1MHz	—	23	—	pF				
Switching Time	Turn-on Time	t _{on}					—	0.1	—	μs
	Storage Time	t _{stg}					—	0.3	—	
	Fall Time	t _f					—	0.1	—	